




There when you need us most

WS Series

6" SUBMERSIBLE CURVES

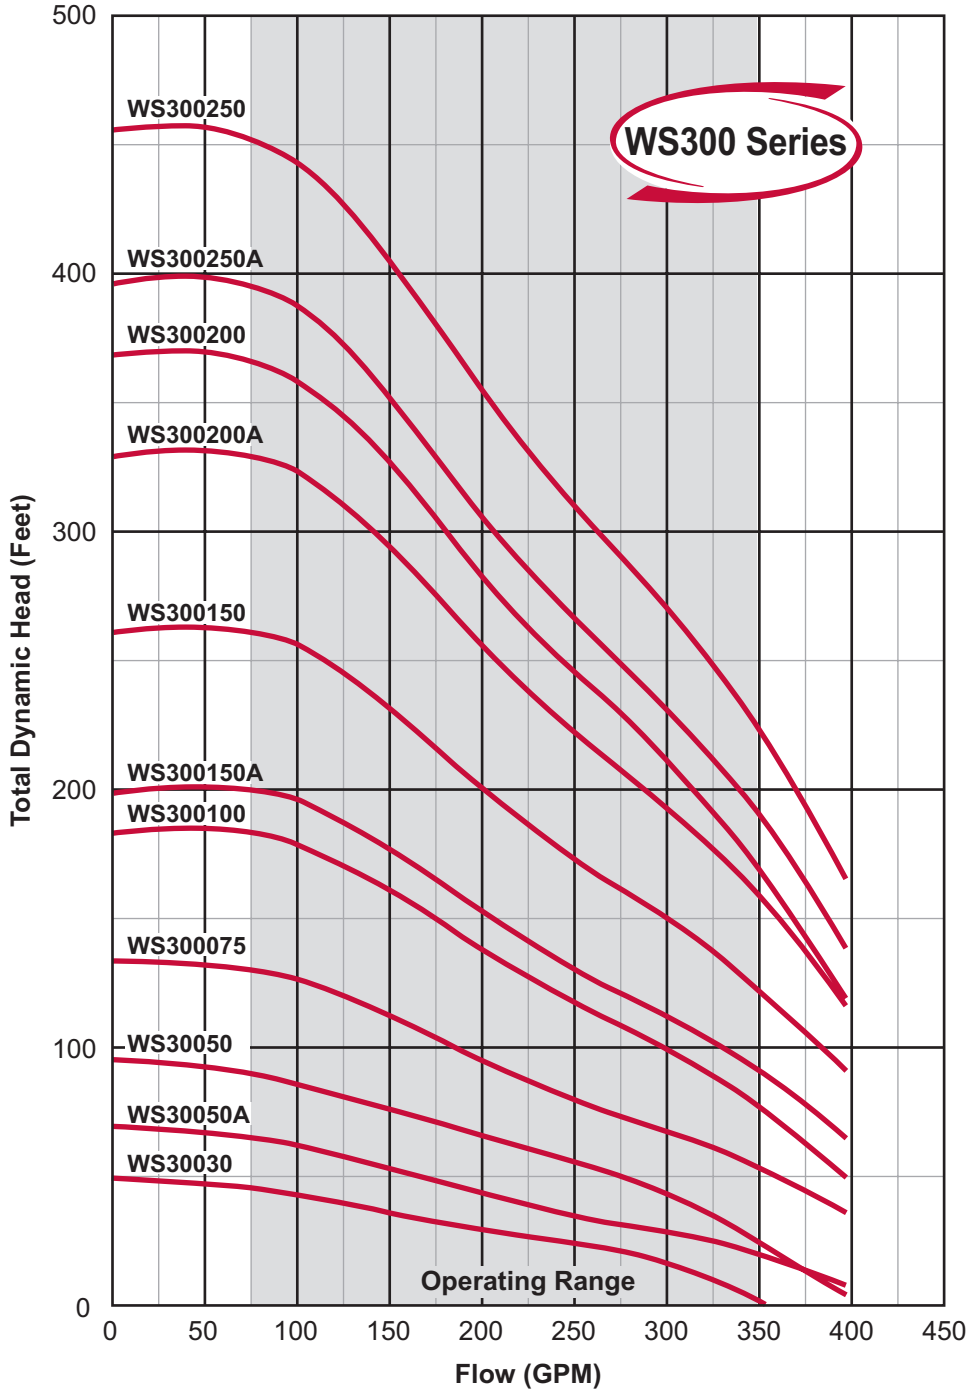

MODEL NO.	HP	STAGES
WS30030*	3.0	1B
WS30050A*	5.0	1
WS30050*	5.0	2BB
WS300075**	7.5	2
WS300100**	10.0	3A
WS300150A**	15.0	3
WS300150**	15.0	4
WS300200A**	20.0	5
WS300200**	20.0	6B
WS300250A**	25.0	6
WS300250**	25.0	7

*4" motor bracket
**6" motor bracket

MODEL NO.: WS300150A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: 0.90 Impeller Dia.: 4.15 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.