




There when you need us most

8" SUBMERSIBLE TURBINE CURVES

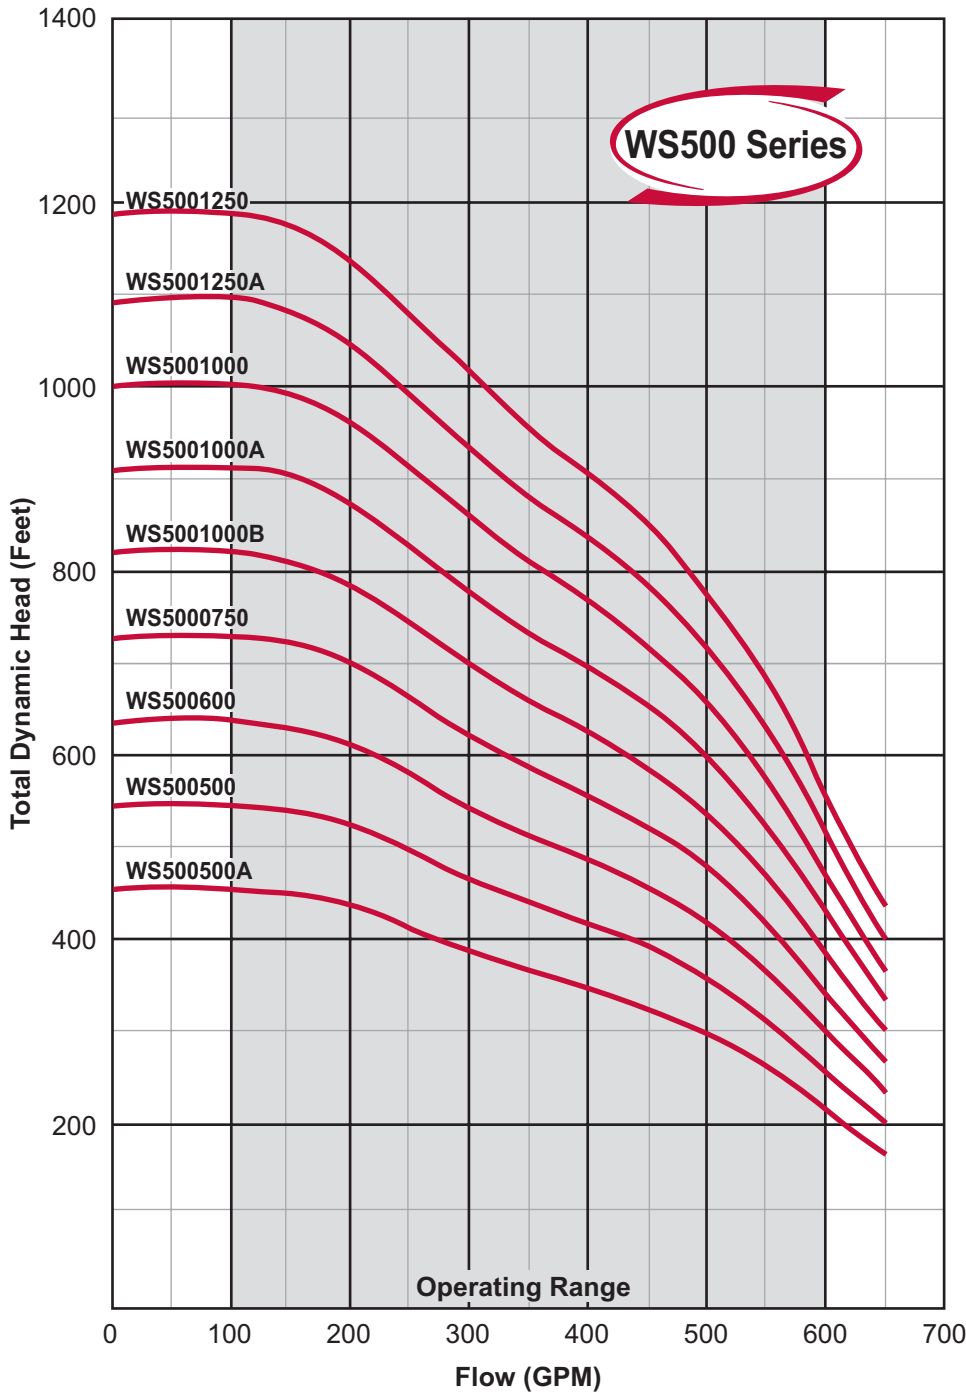

MODEL NO.	HP	STAGES
WS500500A**	50.0	5
WS500500**	60.0	6
WS500600**	60.0	7
WS5000750*	75.0	8
WS5001000B*	100.0	9
WS5001000A*	100.0	10
WS5001000*	100.0	11
WS5001250A*	125.0	12
WS5001250*	125.0	13

**6" motor bracket
*8" motor bracket

MODEL NO.: WS500500A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.