




There when you need us most

WS Series 10" SUBMERSIBLE TURBINE CURVES

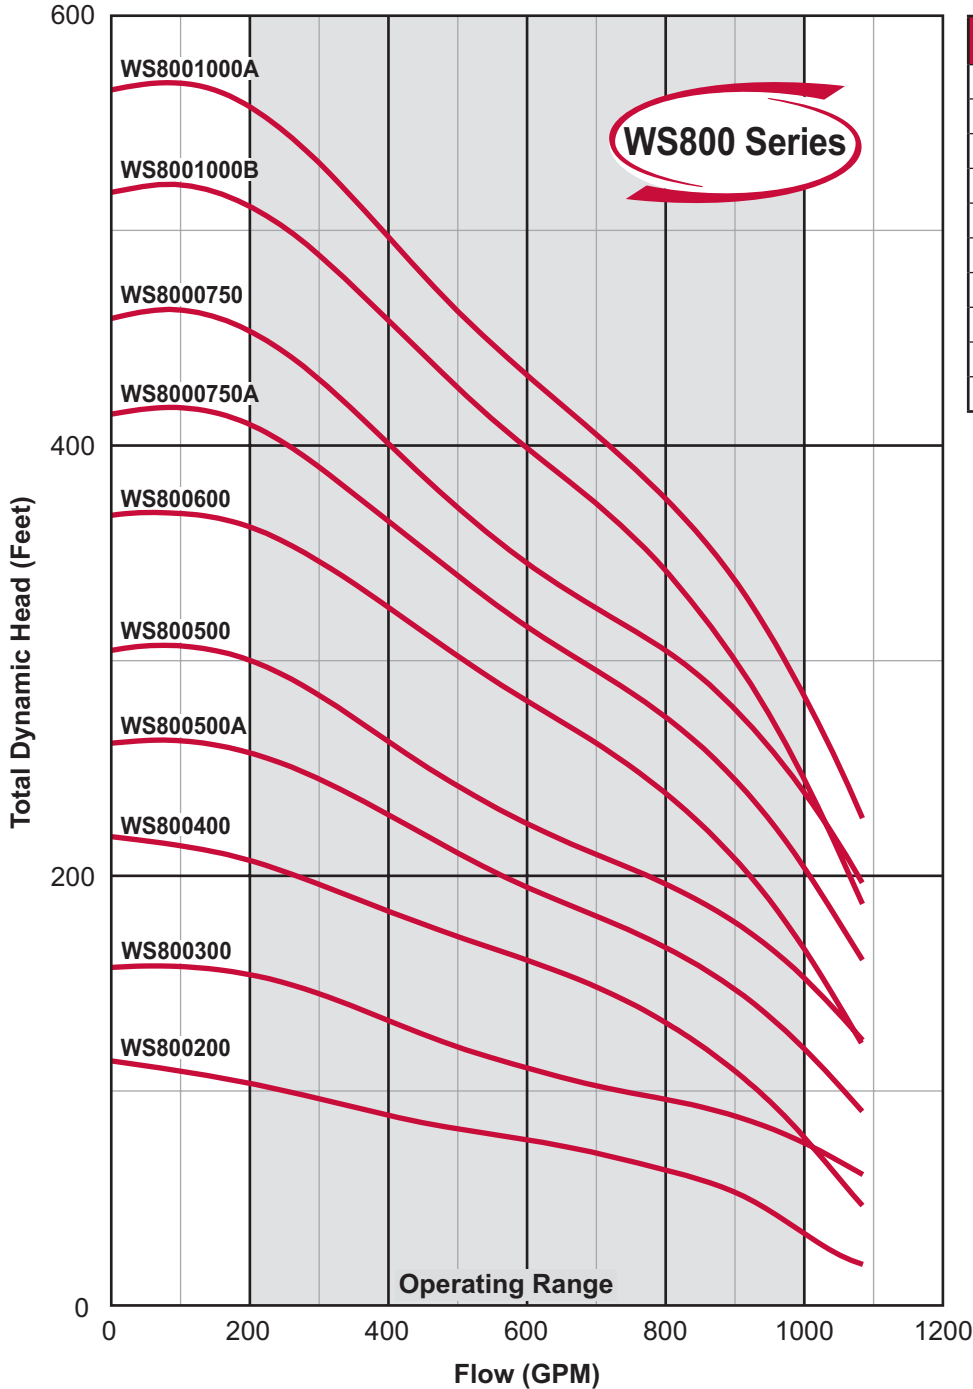

MODEL NO.	HP	STAGES
WS800200**	20.0	1-A
WS800300**	30.0	1
WS800400**	40.0	2-AA
WS800500A**	50.0	2-A
WS800500**	50.0	2
WS800600**	60.0	3-AA
WS8000750A*	75.0	3-A
WS8000750*	75.0	3
WS8001000B*	100.0	4-AA
WS8001000A*	100.0	4-A

**6" motor bracket
*8" motor bracket

MODEL NO.: WS800500A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.