



There when you need us most

# SS SERIES STAINLESS STEEL SEWAGE PUMPS

304 Stainless Steel

## **SS** Series

The SS Series is designed for efficient and reliable handling of sewage or waste water containing suspended solids up to 2" in diameter.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!



### Features and Benefits

---

- 304 stainless steel construction
- 2" solids handling
- High service factor motor design
- 2 pole, dry-submerged continuous duty rated motor type
- Double Viton mechanical seal
- Shielded ball bearings last 50,000 hours
- Automatic & manual operation
- 2" threaded or flanged discharge
- Max emersion depth of 33'
- 25' power cord

### Performance

---

HP Range: .5 - 2 HP, 60Hz.

Capacities to 200 GPM

Heads to 65'

Temperatures to 104° F continuous or 140° F intermittent

### Typical Services



---

- Commercial
- Industrial
- Agricultural



There when you need us most

## SS SERIES STAINLESS STEEL SEWAGE PUMPS

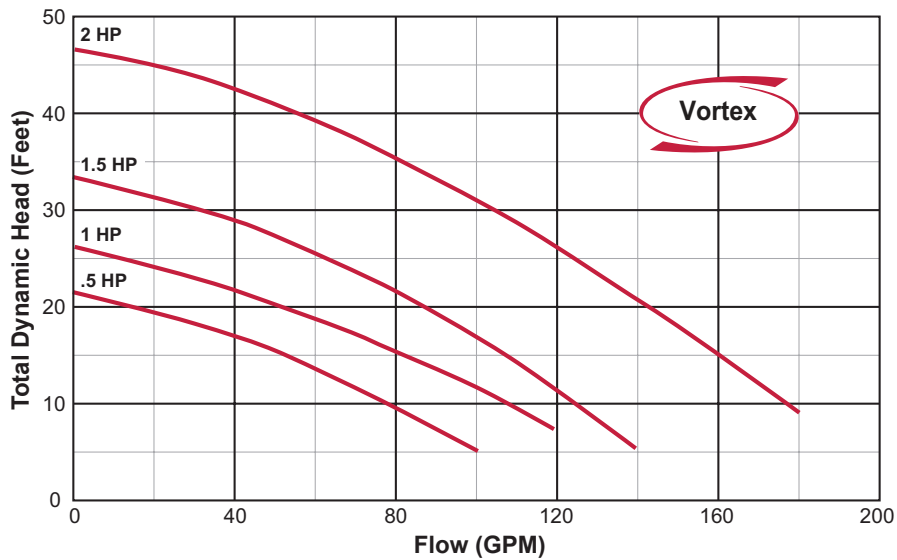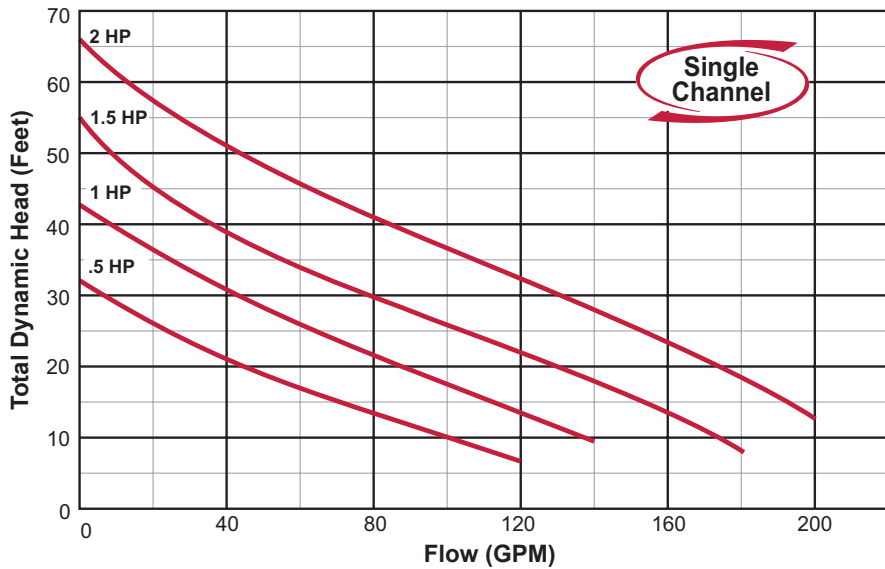

CONSTRUCTION MATERIALS	
Part	Material
Casing	304 SS
Impeller	304 SS
Shaft	304 SS
Motor Frame	304 SS
Fastener	304 SS
Double Mechanical Seal - Upper Side	Carbon
Double Mechanical Seal - Lower Side	Silicon Carbide