




There when you need us most

WS Series

6" SUBMERSIBLE CURVES

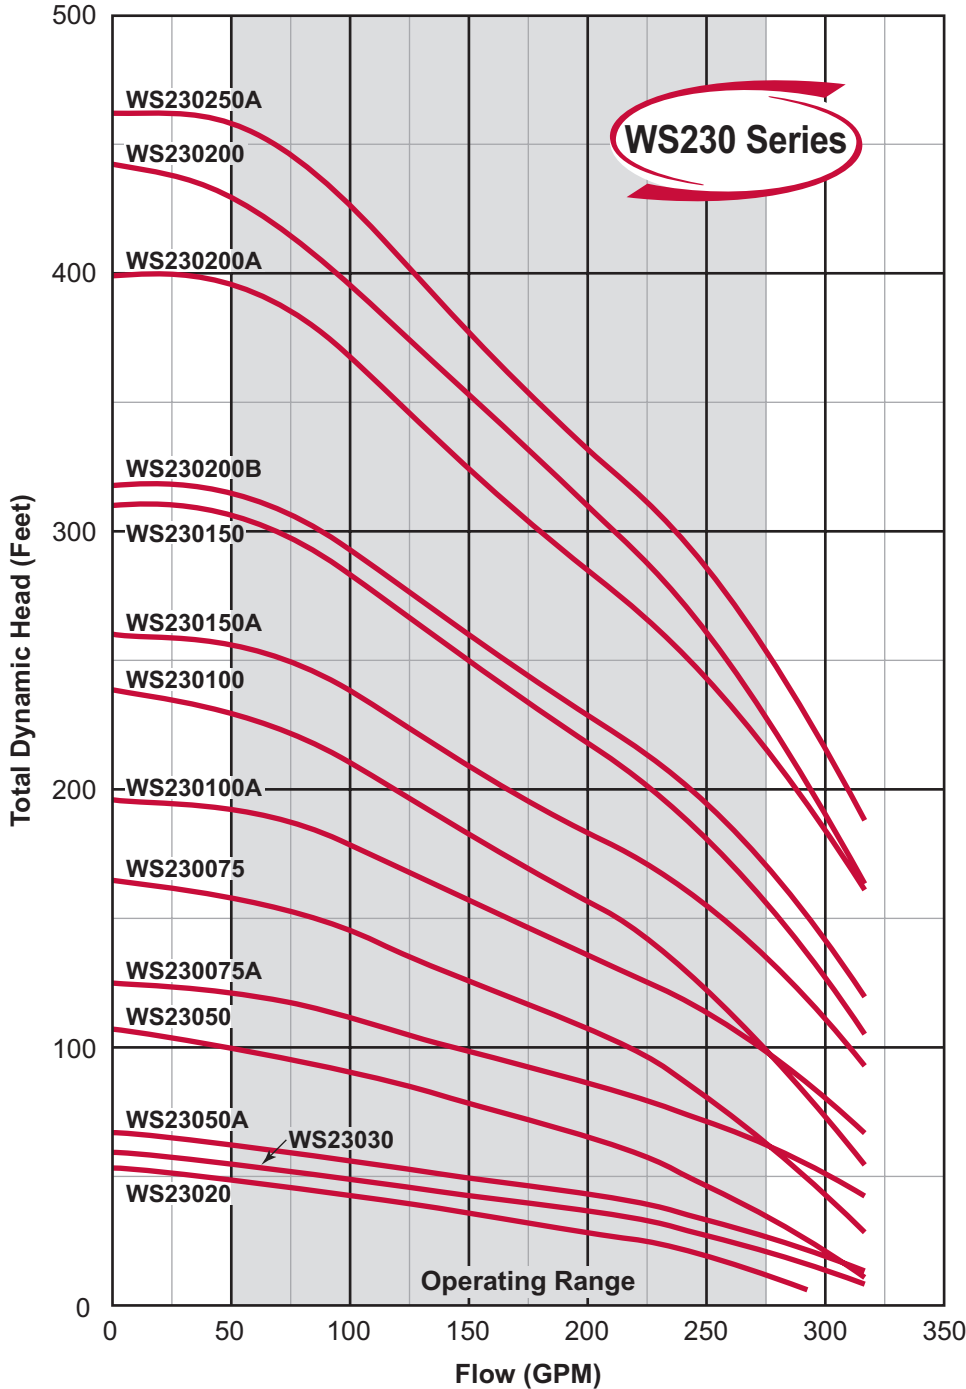

MODEL NO.	HP	STAGES
WS23020*	2.0	1B
WS23030*	3.0	1A
WS23050A*	5.0	1
WS23050*	5.0	2AB
WS230075A**	7.5	2
WS230075**	7.5	3BB
WS230100A**	10.0	3
WS230100**	10.0	4BC
WS230150A**	15.0	4
WS230150**	15.0	5C
WS230200B**	20.0	5
WS230200A**	20.0	6
WS230200**	20.0	7C
WS230250A**	25.0	7

*4" motor bracket
**6" motor bracket

MODEL NO.: WS230150A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: 0.88 Impeller Dia.: 4.14 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.