




There when you need us most

4" SUBMERSIBLE PUMPS

WT Series

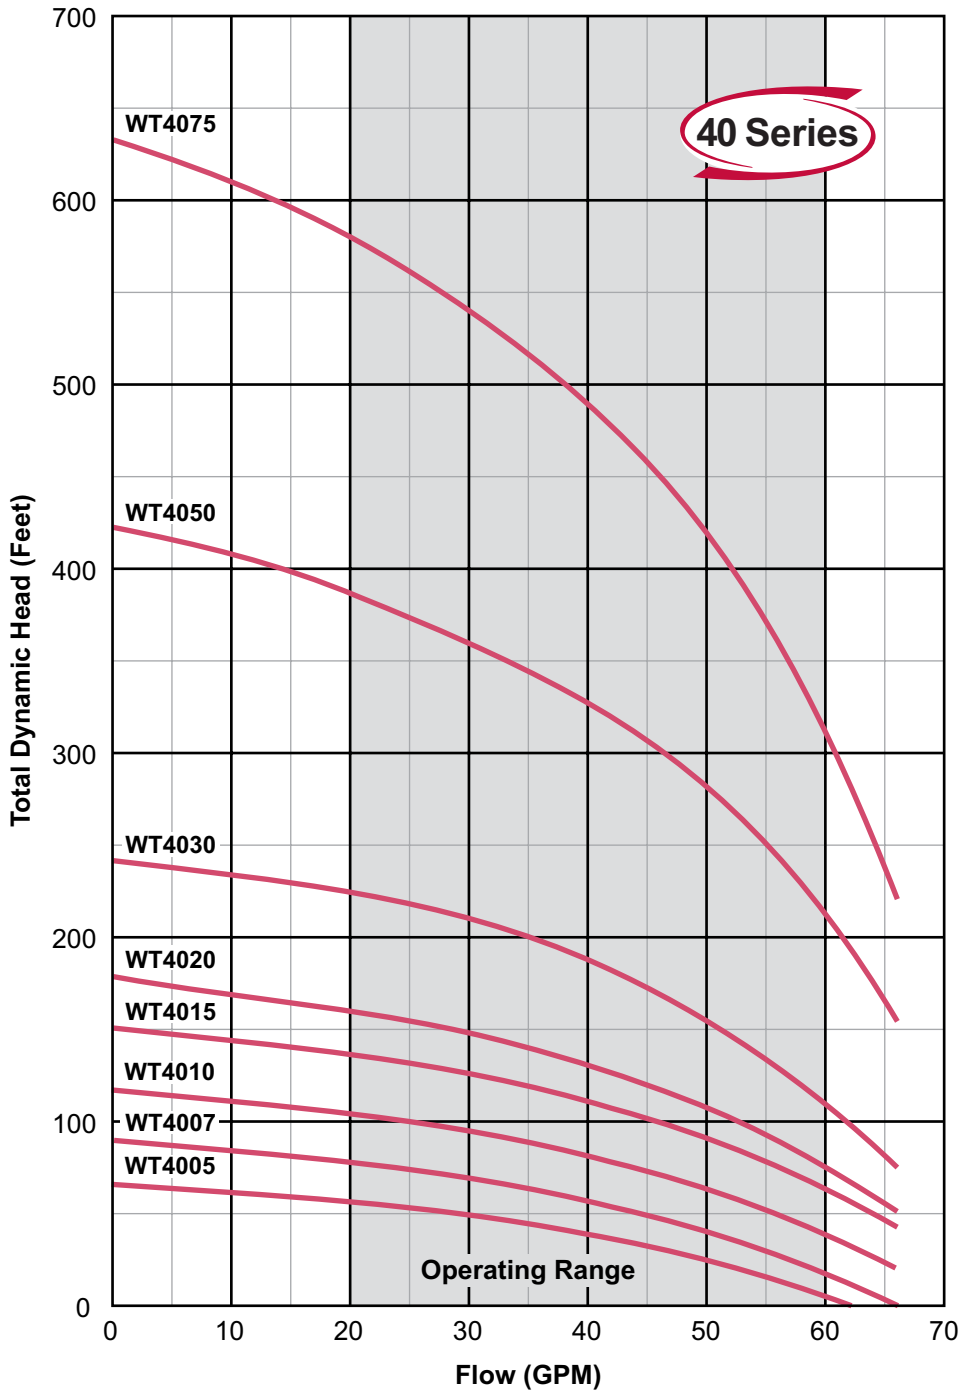

MODEL NO.: WT40502C3

Series/Nominal Rated Flow (GPM) [points to 50 on graph]

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 50 ÷ 10 = 5.0 or 5HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: 0.97 Impeller Dia.: 3.015 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.