



There when you need us most

## VE SERIES SUBMERSIBLE PUMPS

Stainless Steel/Cast Iron Effluent Pumps

### VE Series

VE Series effluent pumps provide you with a reliable solution for a variety of residential and commercial applications.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!

**2 Year  
Warranty**



#### Features and Benefits

- Designed for residential and commercial effluent
- Versatile for many drainage & dewatering applications
- Recessed cast iron vortex impeller ensures flow of liquids & solids
- Standard potted epoxy cord seals
- Double mechanical seal (.5 - 2 HP)
- Continuous duty motor
- Maintenance free design
- Max emersion depth of 30'
- 30' cord length

#### Performance

HP Range: .33 - 2 HP, 60Hz.  
 Capacities to 210 GPM  
 Heads to 79'  
 Temperatures to 104° F

#### Typical Services

- Residential Wastewater
- Commercial Wastewater


Model	HP	Volt	Amps	Discharge	Solid Passage	Dimensions (L x W x H)	Weight
VE5A46	.5	115	6	2"	.25"	8.7" x 5.7" x 14.7"	30 lbs.
VE5C46	.5	230	3	2"	.25"	8.7" x 5.7" x 14.7"	30 lbs.
VE5A55	.5	115	10	2"	.25"	12.9" x 6.8" x 17.8"	41 lbs.
VE5C55	.5	230	5	2"	.25"	12.9" x 6.8" x 17.8"	41 lbs.
VE10C62	1	230	10	2"	.25"	15.9" x 8.4" x 21.1"	75 lbs.
VE10C62-3	1	230-3ph	6	2" *	.25"	15.9" x 8.4" x 21.1"	75 lbs.
VE10D62-3	1	460-3ph	3	2" *	.25"	15.9" x 8.4" x 21.1"	75 lbs.
VE20C79-3	2	230-3ph	9	2" *	.25"	15.7" x 8.4" x 21.9"	77 lbs.
VE20D79-3	2	460-3ph	4.8	2" *	.25"	15.7" x 8.4" x 21.9"	77 lbs.

\* 3" discharge available



There when you need us most

## VE SERIES SUBMERSIBLE EFFLUENT PUMPS

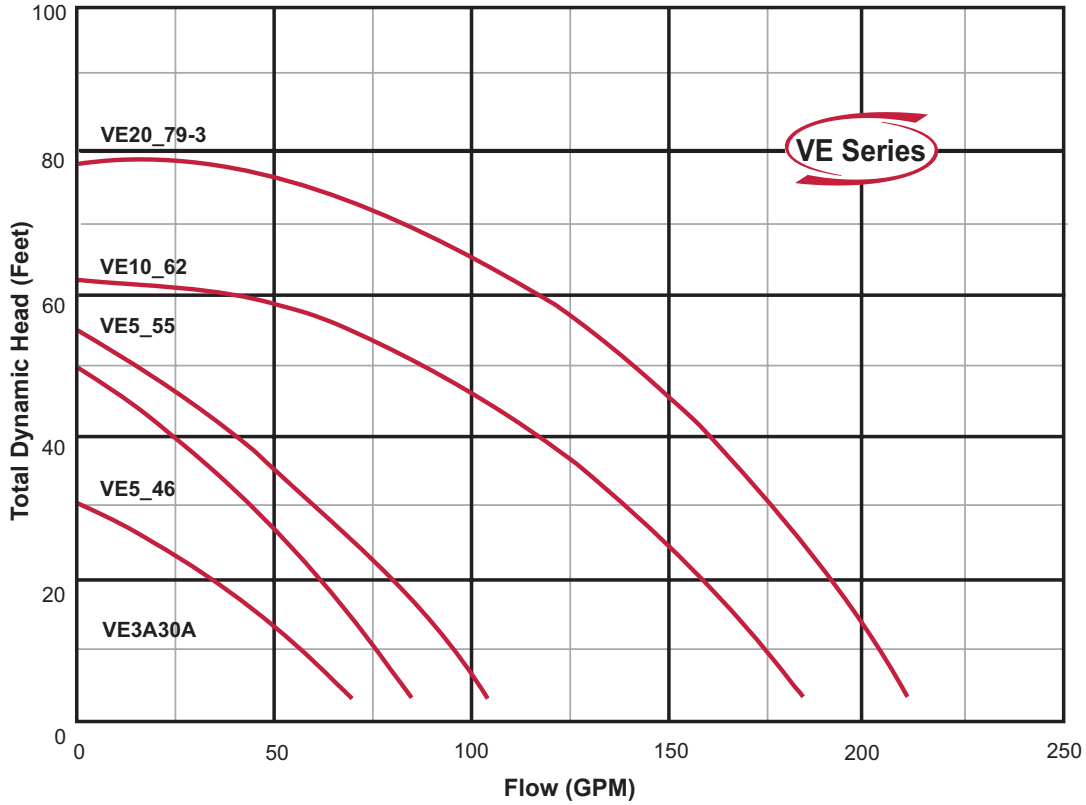

CONSTRUCTION MATERIALS		
Part	3A30A, 5_46	5_55, 10_62, 20_79-3
Handle	Nylon	Powder Coated Steel
Cup Cover	Nylon	Cast Iron
Motor Housing	304SS	304SS
Double Mechanical Seal	Carbon/Ceramic	Ceramic Carbon/Silicon Carbide
Pump Valve	Cast Iron	Cast Iron
Impeller	Cast Iron	Cast Iron