




There when you need us most

# WS Series 10" SUBMERSIBLE TURBINE CURVES

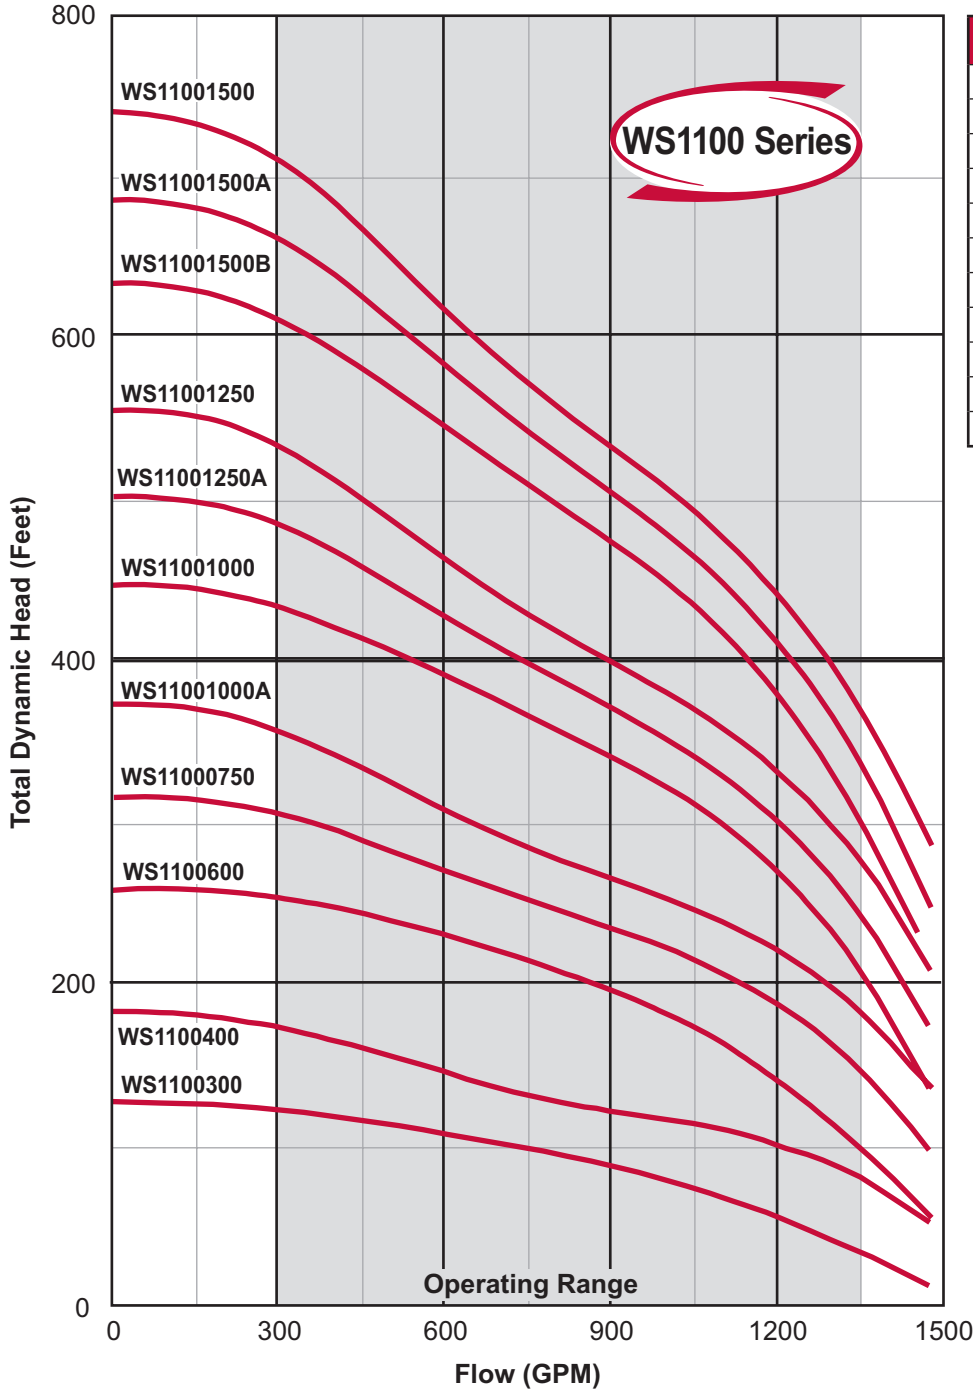

| MODEL NO.    | HP    | STAGES |
|--------------|-------|--------|
| WS1100300**  | 30.0  | 1-A    |
| WS1100400**  | 40.0  | 1      |
| WS1100600**  | 60.0  | 2-AA   |
| WS1100750*   | 75.0  | 2-A    |
| WS11001000A* | 100.0 | 2      |
| WS11001000*  | 100.0 | 3-AA   |
| WS11001250A* | 125.0 | 3-A    |
| WS11001250*  | 125.0 | 3      |
| WS11001500B* | 150.0 | 4-AA   |
| WS11001500A* | 150.0 | 4-A    |
| WS11001500*  | 150.0 | 4      |

\*\*6" motor bracket  
\*8" motor bracket

**MODEL NO.:** WS11001000A4C3

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.