




There when you need us most

6" SUBMERSIBLE CURVES

WS Series

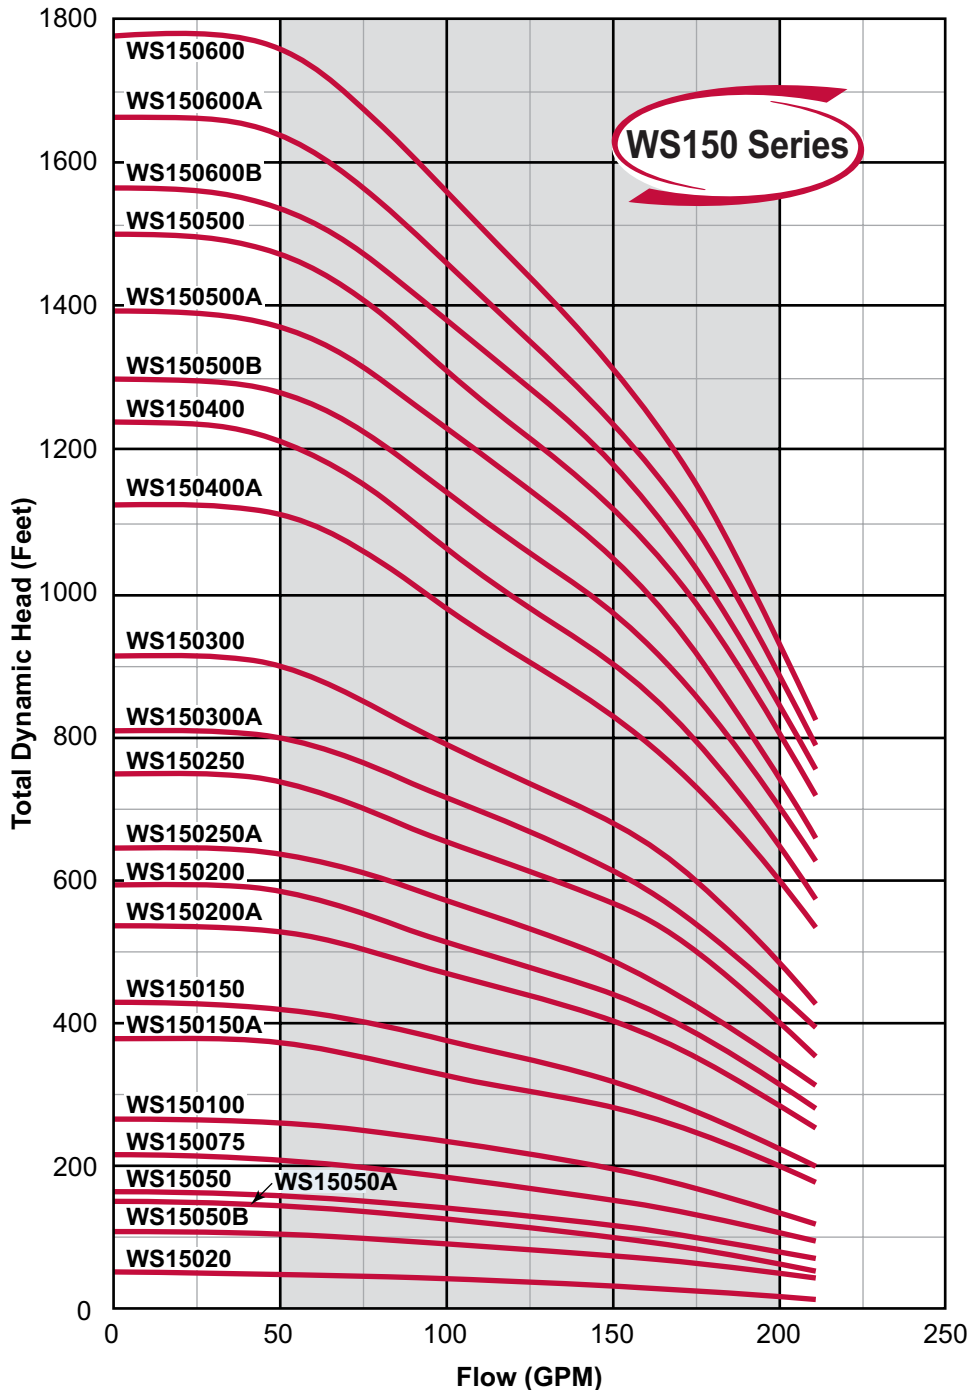

MODEL NO.	HP	STAGES
WS15020	2.0	1
WS15050B	5.0	2
WS15050A	5.0	3A
WS15050	5.0	3
WS150075	7.5	4
WS150100	10.0	5
WS150150A	15.0	7
WS150150	15.0	8
WS150200A	20.0	10
WS150200	20.0	11
WS150250A	25.0	12
WS150250	25.0	14
WS150300A	30.0	15
WS150300	30.0	17
WS150400A	40.0	21
WS150400	40.0	23
WS150500B	50.0	24
WS150500A	50.0	26
WS150500	50.0	28
WS150600B	60.0	29
WS150600A	60.0	31
WS150600	60.0	33

MODEL NO.: WS150200A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: 0.90 Impeller Dia.: 3.78 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.