




There when you need us most

## 6" SUBMERSIBLE CURVES

# WS Series

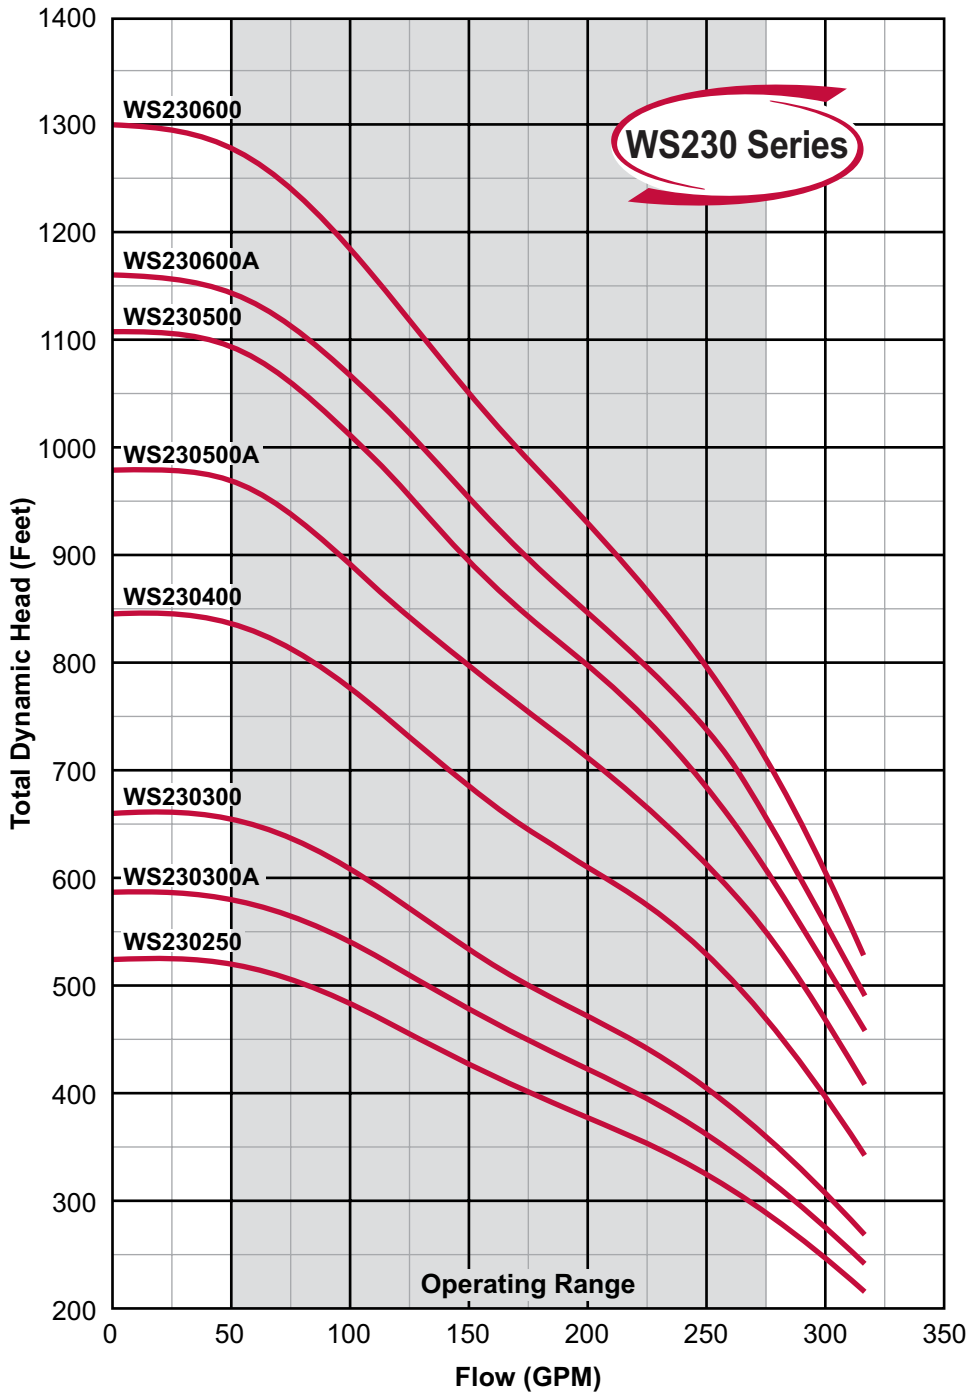

MODEL NO.	HP	STAGES
WS230250	25.0	8
WS230300A	30.0	9
WS230300	30.0	10
WS230400	40.0	13
WS230500A	50.0	15
WS230500	50.0	17
WS230600A	60.0	18
WS230600	60.0	20

### MODEL NO.: WS230300A4C3

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: 0.88 Impeller Dia.: 4.14 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.