


## 6" SUBMERSIBLE CURVES

### WS Series

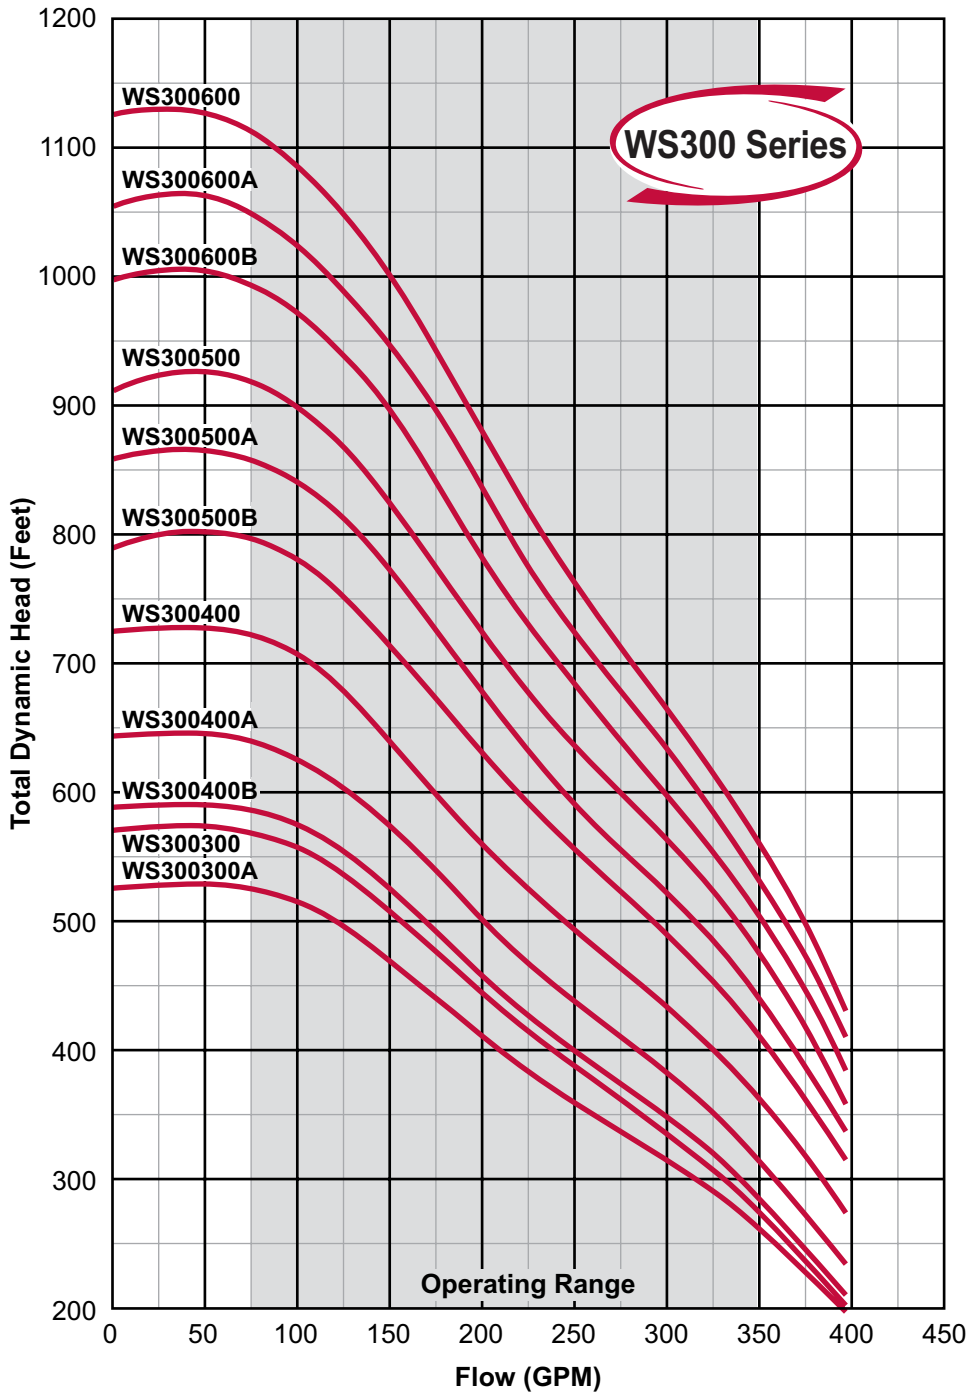

MODEL NO.	HP	STAGES
WS300300A	30.0	8
WS300300	30.0	9B
WS300400B	40.0	9
WS300400A	40.0	10
WS300400	40.0	11
WS300500B	50.0	12
WS300500A	50.0	13
WS300500	50.0	14
WS300600B	60.0	15
WS300600A	60.0	16
WS300600	60.0	17

**MODEL NO.: WS400250A2C3**

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: .90 Impeller Dia.: 4.15 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.