




There when you need us most

6" SUBMERSIBLE CURVES

WS Series

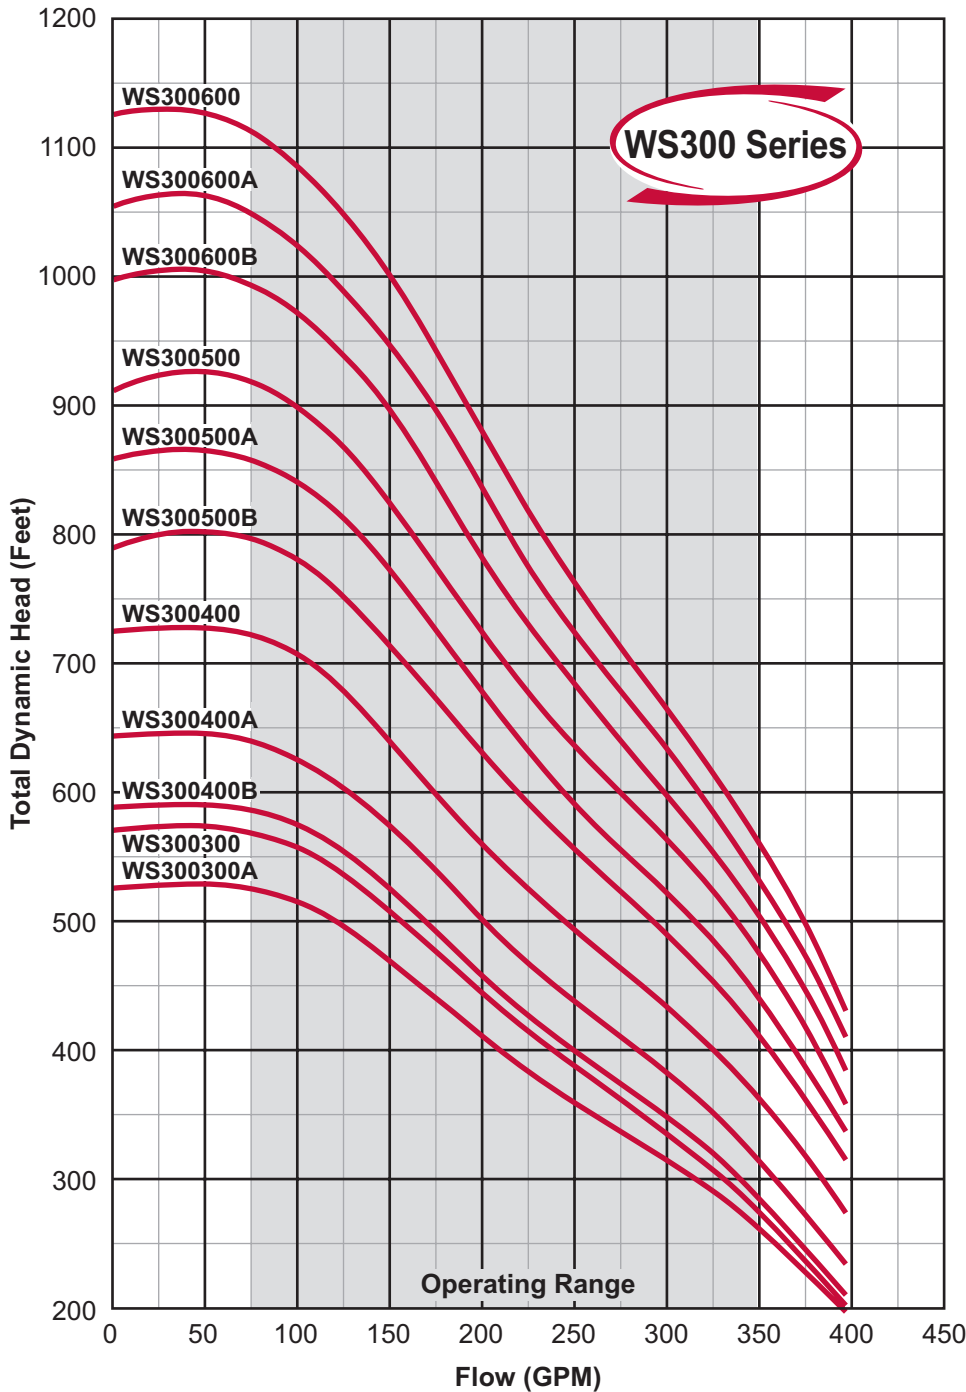

MODEL NO.	HP	STAGES
WS300300A**	30.0	8
WS300300**	30.0	9B
WS300400B**	40.0	9
WS300400A**	40.0	10
WS300400**	40.0	11
WS300500B**	50.0	12
WS300500A**	50.0	13
WS300500**	50.0	14
WS300600B**	60.0	15
WS300600A**	60.0	16
WS300600**	60.0	17

**6" motor bracket

MODEL NO.: WS400250A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: .90 Impeller Dia.: 4.15 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.