




There when you need us most

# WS Series 8" SUBMERSIBLE TURBINE CURVES

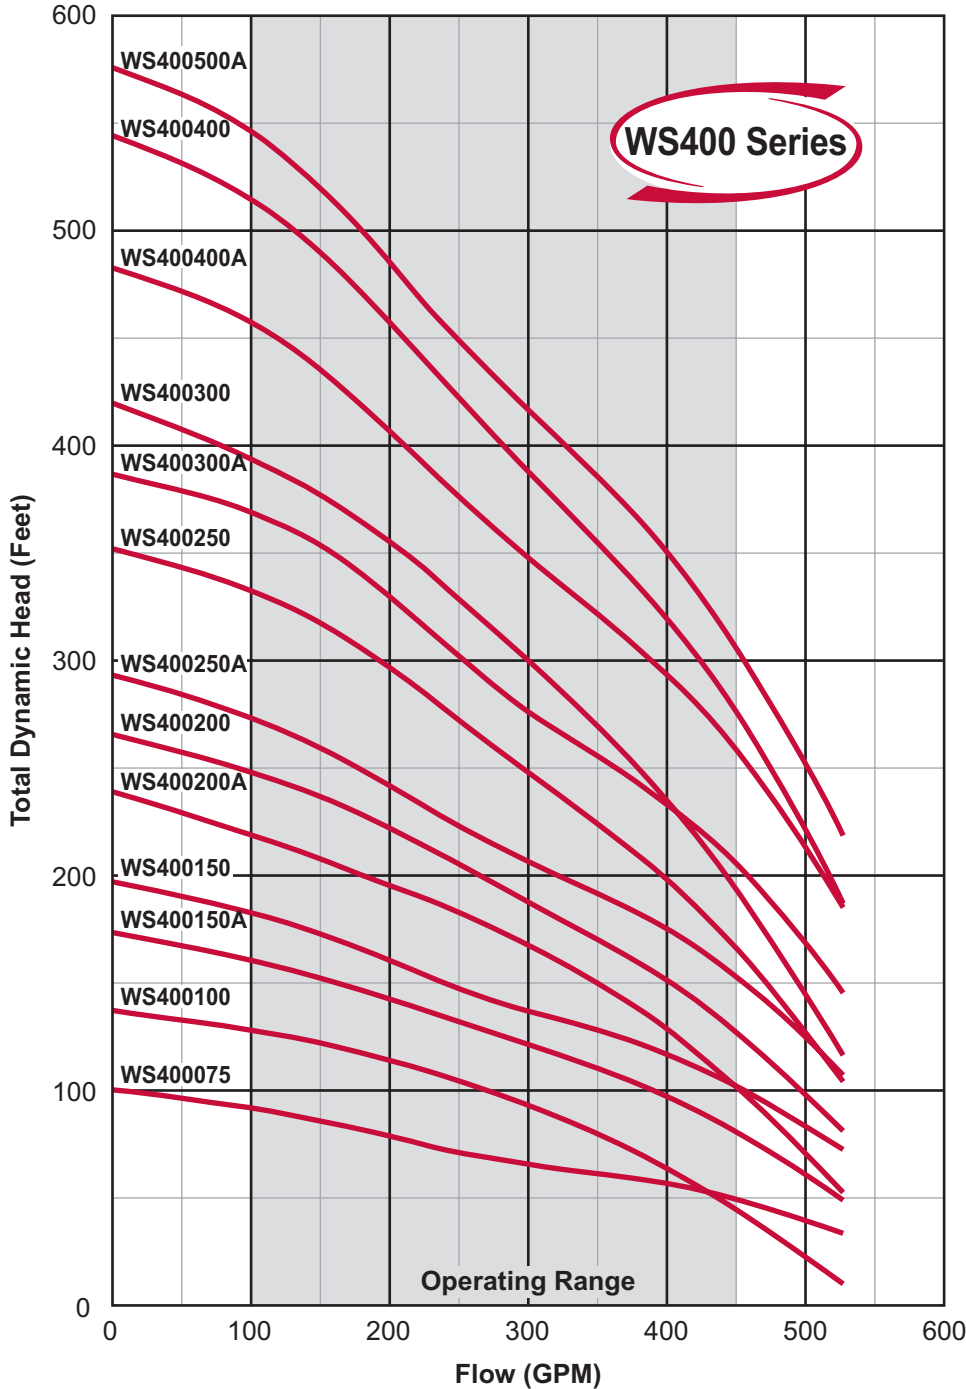

MODEL NO.	HP	STAGES
WS400075**	7.5	1
WS400100**	10.0	2AB
WS400150A**	15.0	2A
WS400150**	15.0	2
WS400200A**	20.0	3AA
WS400200**	20.0	3A
WS400250A**	25.0	3
WS400250**	25.0	4B
WS400300A**	30.0	4
WS400300**	30.0	5BB
WS400400A**	40.0	5
WS400400**	40.0	6B
WS400500A**	50.0	6

\*\*6" motor bracket

### MODEL NO.: WS400250A2C3

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower  
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.