




There when you need us most

WS Series 8" SUBMERSIBLE TURBINE CURVES

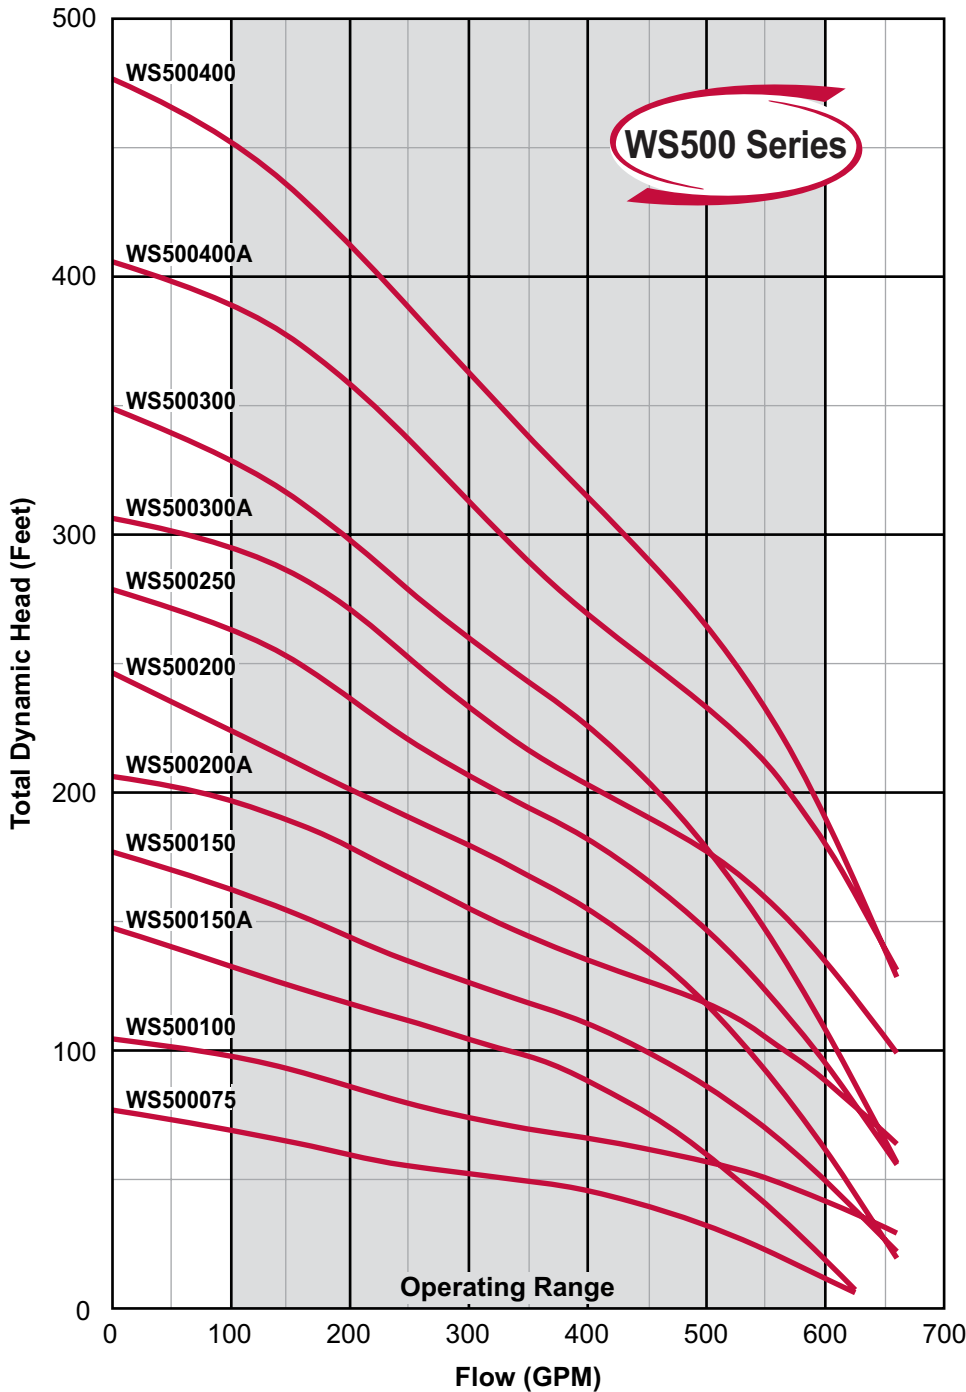

MODEL NO.	HP	STAGES
WS500075	7.5	1A
WS500100	10.0	1
WS500150A	15.0	2AB
WS500150	15.0	2B
WS500200A	20.0	2
WS500200	20.0	3BB
WS500250	25.0	3B
WS500300A	30.0	3
WS500300	30.0	4AB
WS500400A	40.0	4
WS500400	40.0	5B

MODEL NO.: WS500200A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.