




There when you need us most

WS Series 8" SUBMERSIBLE TURBINE CURVES

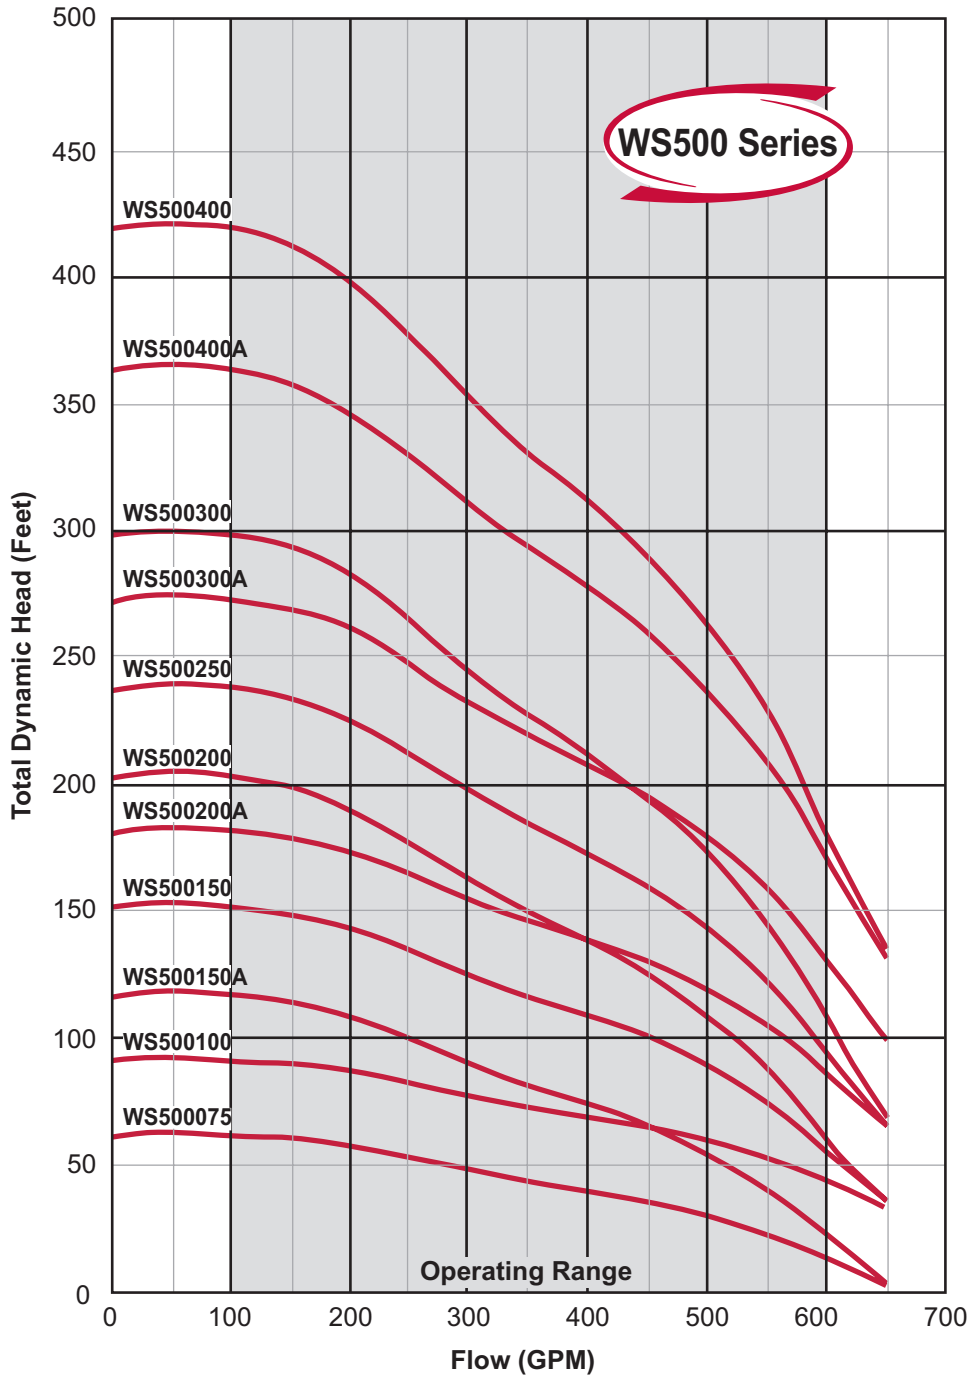

| MODEL NO. | HP | STAGES |
|-------------|------|--------|
| WS500075** | 7.5 | 1A |
| WS500100** | 10.0 | 1 |
| WS500150A** | 15.0 | 2AB |
| WS500150** | 15.0 | 2B |
| WS500200A** | 20.0 | 2 |
| WS500200** | 20.0 | 3BB |
| WS500250** | 25.0 | 3B |
| WS500300A** | 30.0 | 3 |
| WS500300** | 30.0 | 4AB |
| WS500400A** | 40.0 | 4 |
| WS500400** | 40.0 | 5B |

**6" motor bracket

MODEL NO.: WS500200A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.