




There when you need us most

## 8" SUBMERSIBLE TURBINE CURVES

# WS Series

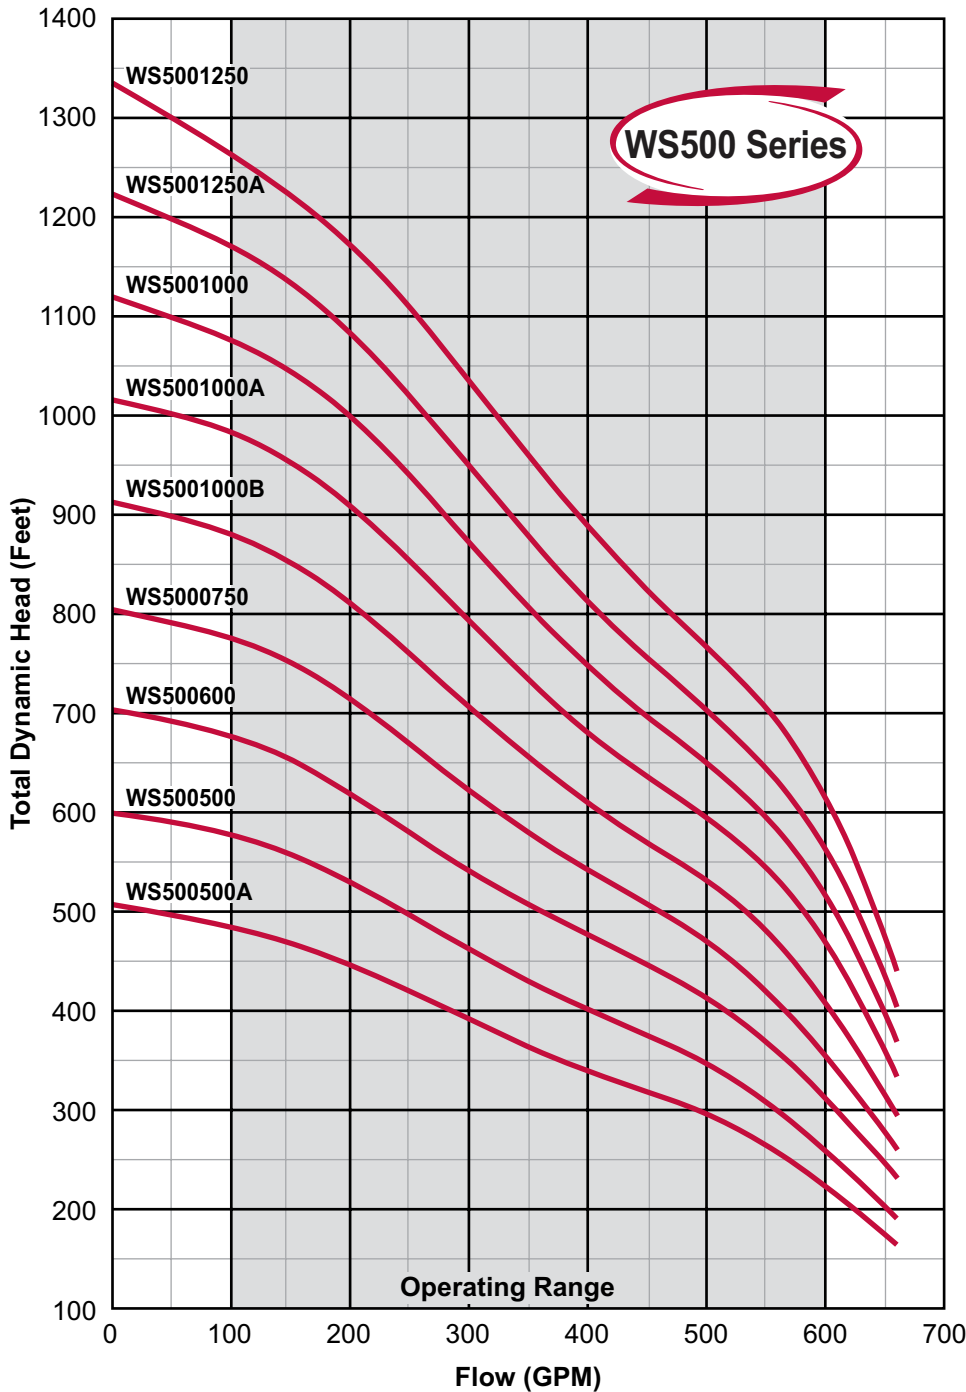

MODEL NO.	HP	STAGES
WS500500A	50.0	5
WS500500	50.0	6
WS500600	60.0	7
WS5000750	75.0	8
WS5001000B	100.0	9
WS5001000A	100.0	10
WS5001000	100.0	11
WS5001250A	125.0	12
WS5001250	125.0	13

### MODEL NO.: WS500500A4C3

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.