


4" SUBMERSIBLE PUMPS



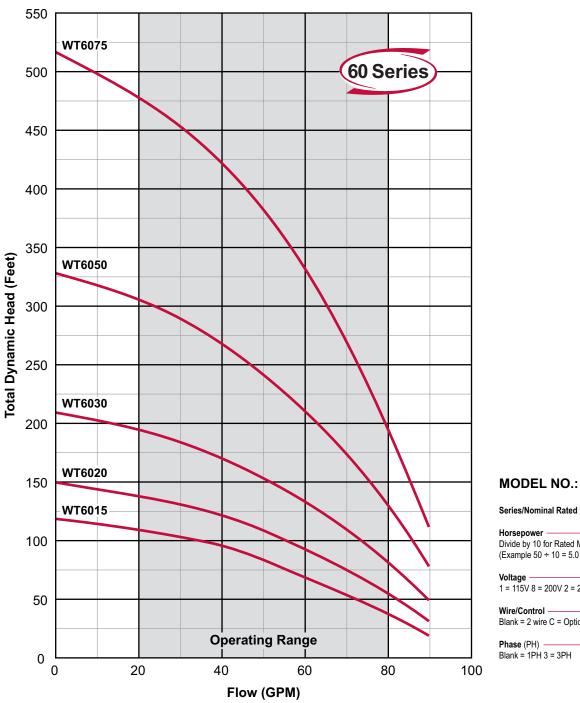

Series/Nominal Rated Flow (GPM) Horsepower Divide by 10 for Rated Motor Horsepower

WT60502C3

(Example 50 ÷ 10 = 5.0 or 5HP)

1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control Blank = 2 wire C = Optional Control

Phase (PH) Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.

PEI_{CL}: 0.96 Impeller Dia.: 3.015 (in.)