



There when you need us most

TANK-E-LIMINATOR

Airless Water Pressurizing System

The Webtrol Tank-E-Limator is an airless water pres-surizing system.

The Tank-E-Limator takes the place of a conventional tank pressure system that requires air to operate. It is installed between two lengths of drop pipe inside the well casing, eliminating the need for any above ground storage tank.

Its operation is simple. When the pump runs, an elastic member in the unit expands, providing a pressurized stor-age reservoir in the drop pipe. When water is used, the elastic member slowly contracts, providing draw off and preventing pump cycling.

Ideal when space is at a minimum or when the only location available for you to place a tank is where it would be subjected to freezing temperatures.



Features and Benefits

- Saves valuable floor space
- Cannot waterlog
- Installed below the frost line, eliminating freezing
- No air volume controls or air charging devices needed
- Reduces water hammer
- Easy installation
- No maintenance required

Performance

When installed in a 6 1/4" I.D. well casing and operated at a pressure switch setting of 20 PSI cut-in and 50 PSI cut-out, draw off will be approximately 12 to 13 quarts.


Warranty

12 months from date of installation, or 18 months from date of manufacture, whichever occurs first.



There when you need us most

TANK-E-LIMINATOR AIRLESS PRESSURIZING SYSTEM

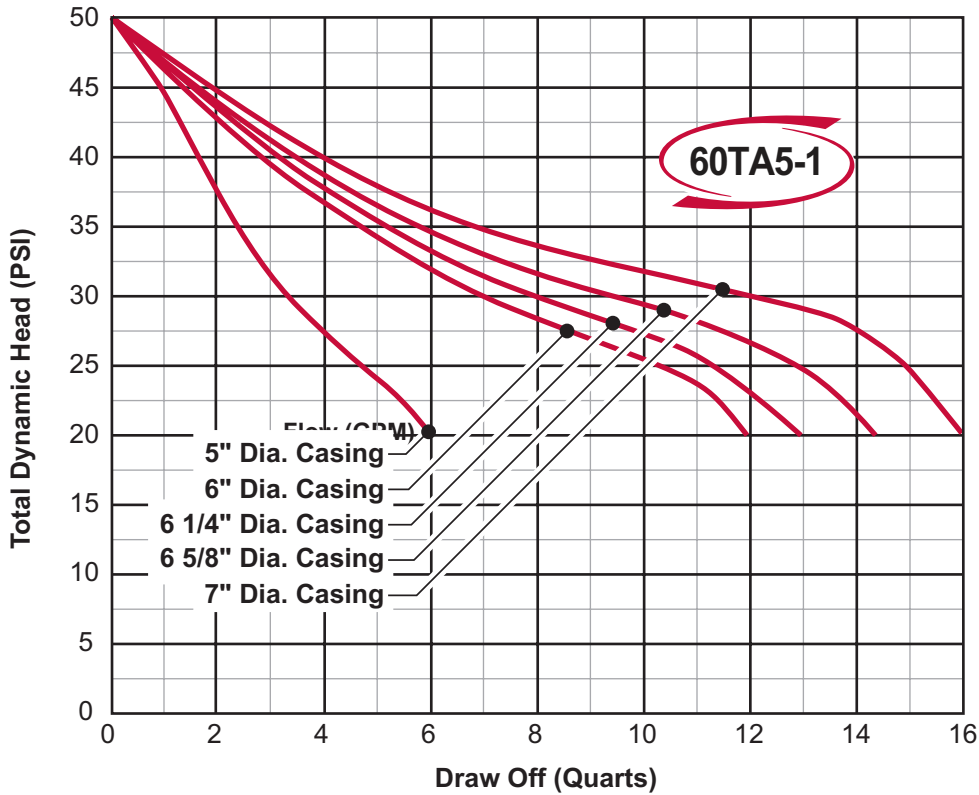

Single Unit Installation				
Model	Type	Length	Draw Off 20-50 PSI	Replaces Tank Size
60TA5-1	In Well	60"	13 Quarts	42 Gallon