



There when you need us most

## VS SERIES SUBMERSIBLE PUMPS


Stainless Steel/Cast Iron Sewage Pumps

### VS Series

VS Series sewage pumps provide you with a reliable solution for a variety of residential and commercial applications.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!

**2 Year Warranty**

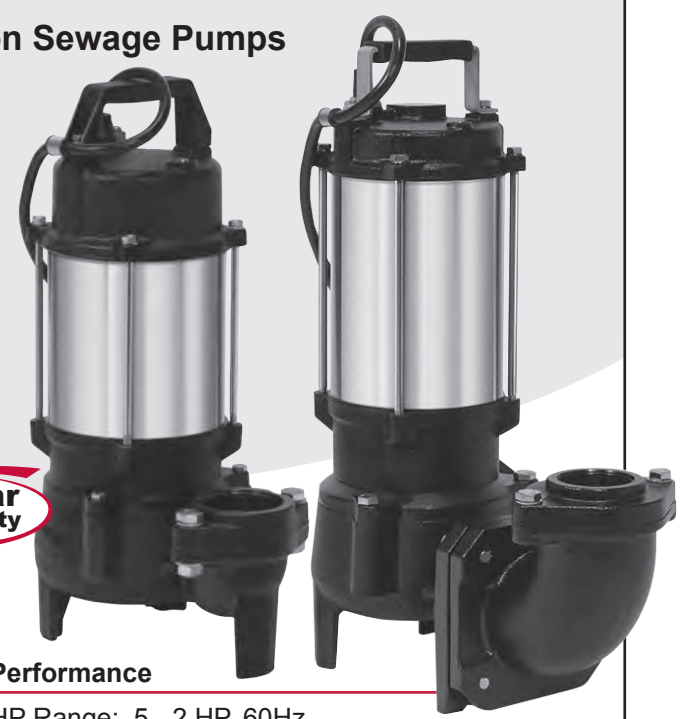

#### Features and Benefits

- Designed for residential and commercial sewage
- Solid handling & dewatering applications
- Recessed cast iron vortex impeller ensures flow of liquids and solids
- Standard potted epoxy cord seals
- Double mechanical seal
- Continuous duty motor
- Maintenance free design
- Max emersion depth of 30'
- 30' cord length

#### Performance

- HP Range: .5 - 2 HP, 60Hz.
- Capacities to 190 GPM
- Heads to 75'
- Temperatures to 104° F

#### Typical Services

- Residential Wastewater
- Commercial Wastewater


Model	HP	Volt	Amps	Discharge	Solid Passage	Dimensions (L x W x H)	Weight
VS5A24	.5	115	6	2"	2"	8.7" x 5.7" x 16.2"	30 lbs.
VS5C24	.5	230	3	2"	2"	8.7" x 5.7" x 16.2"	30 lbs.
VS5A30	.5	115	6	2"	1.5"	8.7" x 5.7" x 16.2"	30 lbs.
VS5C30	.5	230	3	2"	1.5"	8.7" x 5.7" x 16.2"	30 lbs.
VS5A38	.5	115	10	2"	1.5"	8.7" x 5.7" x 18.3"	41 lbs.
VS5C38	.5	230	5	2"	1.5"	8.7" x 5.7" x 18.3"	41 lbs.
VS10C59	1	230	10	2" *	1.5"	15.3" x 8.2" x 21.6"	75 lbs.
VS10C59-3	1	230-3ph	6	2" *	1.5"	15.3" x 8.2" x 21.6"	75 lbs.
VS10D59-3	1	460-3ph	3	2" *	1.5"	15.3" x 8.2" x 21.6"	75 lbs.
VS20C75-3	2	230-3ph	9	2" *	1.5"	15.3" x 8.2" x 22.4"	77 lbs.
VS20D75-3	2	460-3ph	4.8	2" *	1.5"	15.3" x 8.2" x 22.4"	77 lbs.

\* 3" discharge available



There when you need us most

## VS SERIES SUBMERSIBLE SEWAGE PUMPS

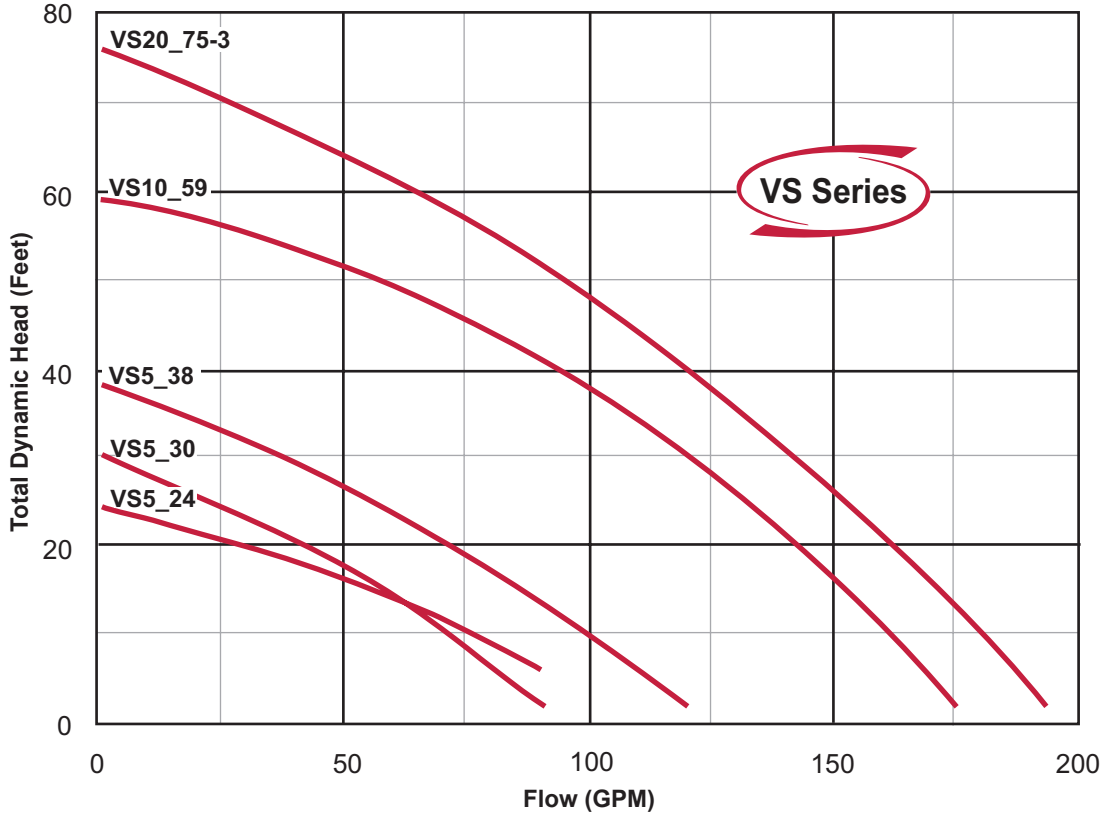

CONSTRUCTION MATERIALS		
Part	5_24, 5_30	5_38, 5_59, 5_75
Handle	Nylon	Powder Coated Steel
Cup Cover	Nylon	Cast Iron
Motor Housing	304SS	304SS
Double Mechanical Seal	Ceramic Carbon/Silicon Carbide	Ceramic Carbon/Silicon Carbide
Pump Valve	Cast Iron	Cast Iron
Impeller	Cast Iron	Cast Iron