

WEBTROL

There when you need us most



Water Well Pumps

- 4", 6", 8" & 10" Submersible Pumps
- Stainless Steel Construction
- Motors & Controls, Jet Pumps, and Booster Pumps


C US
Drinking Water
NSF/ANSI 61
NSF/ANSI 372




There when you need us most





There when you need us most

4" WT Series Submersible	3-16
Construction & Design	4
4" WT Series Family Curves	5
5 Series Curves	6
7 Series Curves	7
10 Series Curves	8
13 Series Curves	9
18 Series Curves	10
25 Series Curves	11
35 Series Curves	12
40 Series Curves	13
55 Series Curves	14
60 Series Curves	15
80 Series Curves	16
4" WT Series SubDrive System	17-27
5-40 Series SD75 Curves	18-19
5-35 Series SD100 Curves	20-21
5-60 Series SD150 Curves	22-24
7-80 Series SD300 Curves	24-26
Features & Benefits	27
Typical System, Tank Sizing	27
Notes Page (Customer Use)	28
6" WT Series Submersible	29-31
Construction & Design	30
50 Series Curves	31
Notes Page (Customer Use)	32
4" WS Series Submersible	33-42
Construction & Design	34
4" WS Series Family Curves	35
5 Series Curves	36
7 Series Curves	37
10 Series Curves	38
18 Series Curves	39
25 Series Curves	40
40 Series Curves	41
75 Series Curves	42
6" WS Series Submersible Turbine	43-55
Construction & Design	44
6" WS Series Submersible Turbine	
Family Curves	45
90 Series Curves	46
150 Series Curves	47
230 Series Curves	48-49
300 Series Curves	50-51
HP / Eff. Information	52-55
Notes Page (Customer Use)	56
8" WS Series Submersible Turbine	57-65
Construction & Design	58
8" WS Series Submersible Turbine	
Family Curves	59
400 Series Curves	60-61
500 Series Curves	62-63
HP / Eff. Information	64-65
Notes Page (Customer Use)	66
10" WS Series Submersible Turbine	67-78
Construction & Design	68
10" WS Series Submersible Turbine	
Family Curves	69
600 Series Curves	70-71
800 Series Curves	72-73
1100 Series Curves	74-75
HP / Eff. Information	76-78
Motors & Controls	79-86
4 Inch Submersible Motors	80
6 & 8 Inch Submersible Motors	81
Control Boxes, Pumptec & SubMonitor	82
SymCom Motor Protection Devices	83
Solid State Starters For 3PH Motors	84
Pump Control Panels 3PH Motors	85
K-5 Dual-Element Time-Delay Fuses	86
Jet Pump - Shallow Well	87-88
Performance	88
Jet Pump - Convertible	89-90
Performance	90
Centrifugal - Cast Iron	91-92
Performance	92
EZ Series Booster	93-102
Construction & Design	94-95
G Series Family Curves	96
G5 Series Curves	97
G10 Series Curves	98
G15 Series Curves	99
G20 Series Curves	100
G35 Series Curves	101
Repair Parts	102
Tank-E-Limator	103-104
Performance Curve & Chart	104
Conditions Of Sale	105
Limited Warranty	106





There when you need us most

4" WT SERIES SUBMERSIBLE

WT Series

Webtrol's 4" WT Series

Webtrol's **WT** Series pumps offer superior performance and exceptional resistance to abrasives, due to the floating stack design.

An excellent choice for residential and commercial applications.


Specifications

- Flows from 5 to 80 GPM.
- Heads to 1,360 feet.
- HP range: 1/2 - 10 HP, 60Hz



4" WT SERIES SUBMERSIBLE

Construction And Design Features


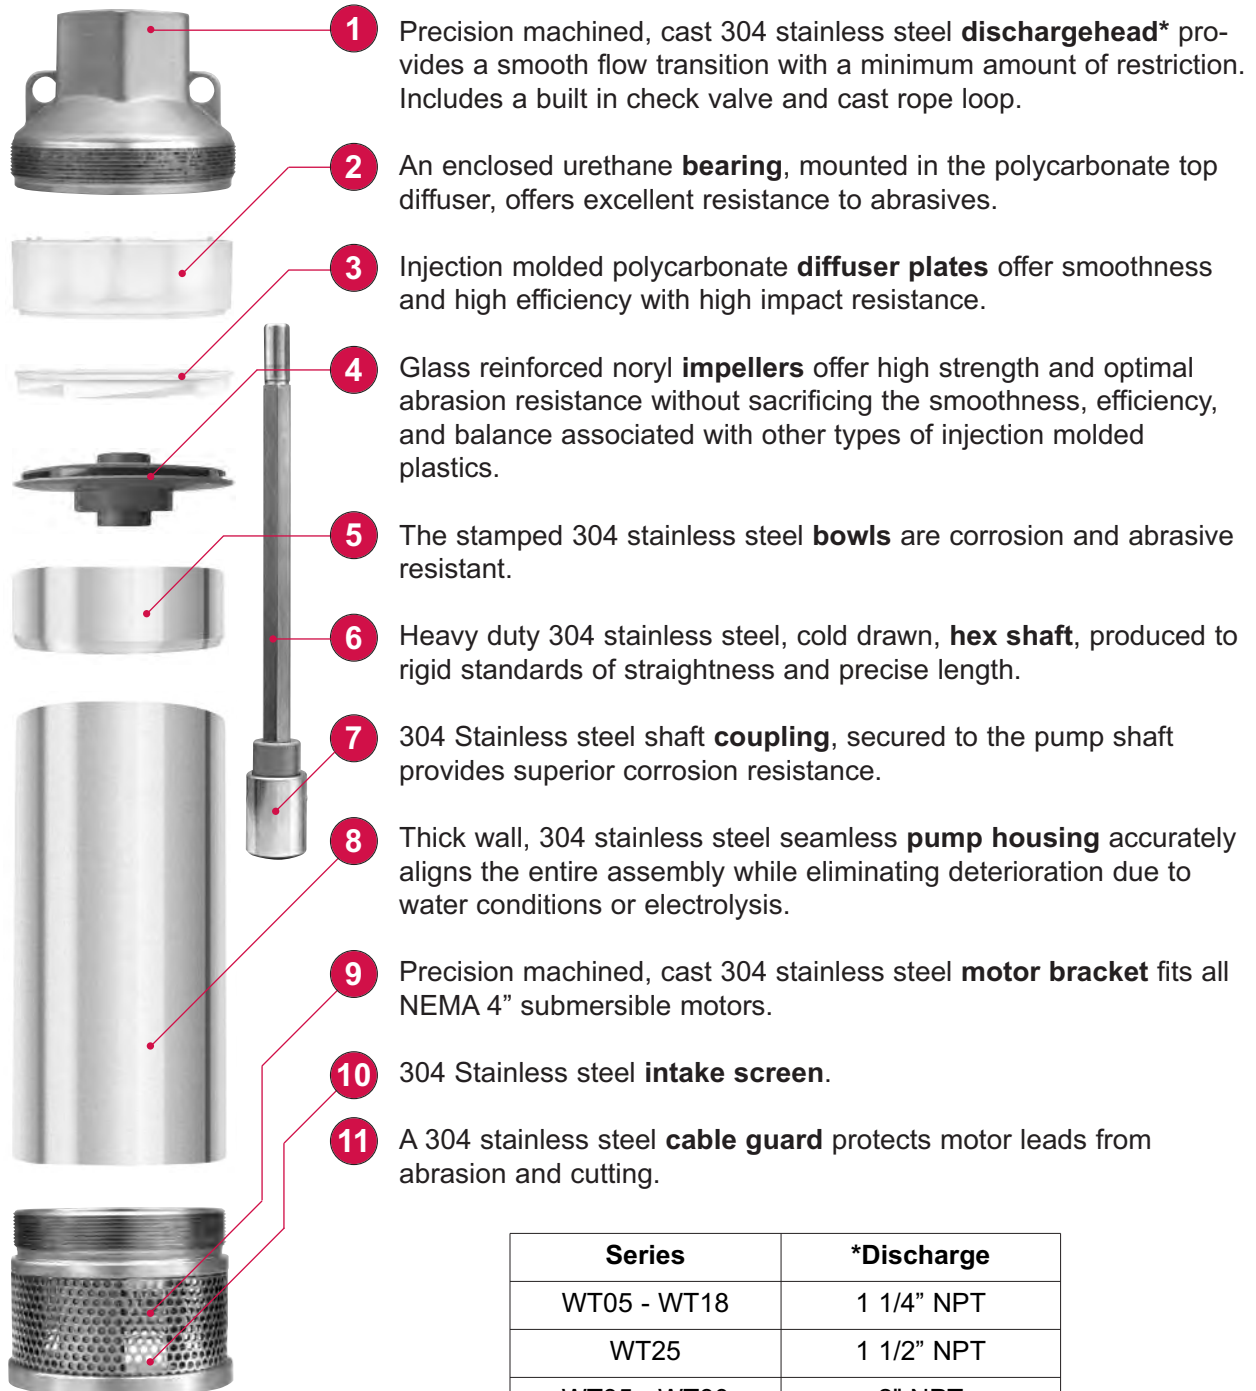


Series	*Discharge
WT05 - WT18	1 1/4" NPT
WT25	1 1/2" NPT
WT35 - WT80	2" NPT



There when you need us most


4" WT SERIES SUBMERSIBLE FAMILY CURVES

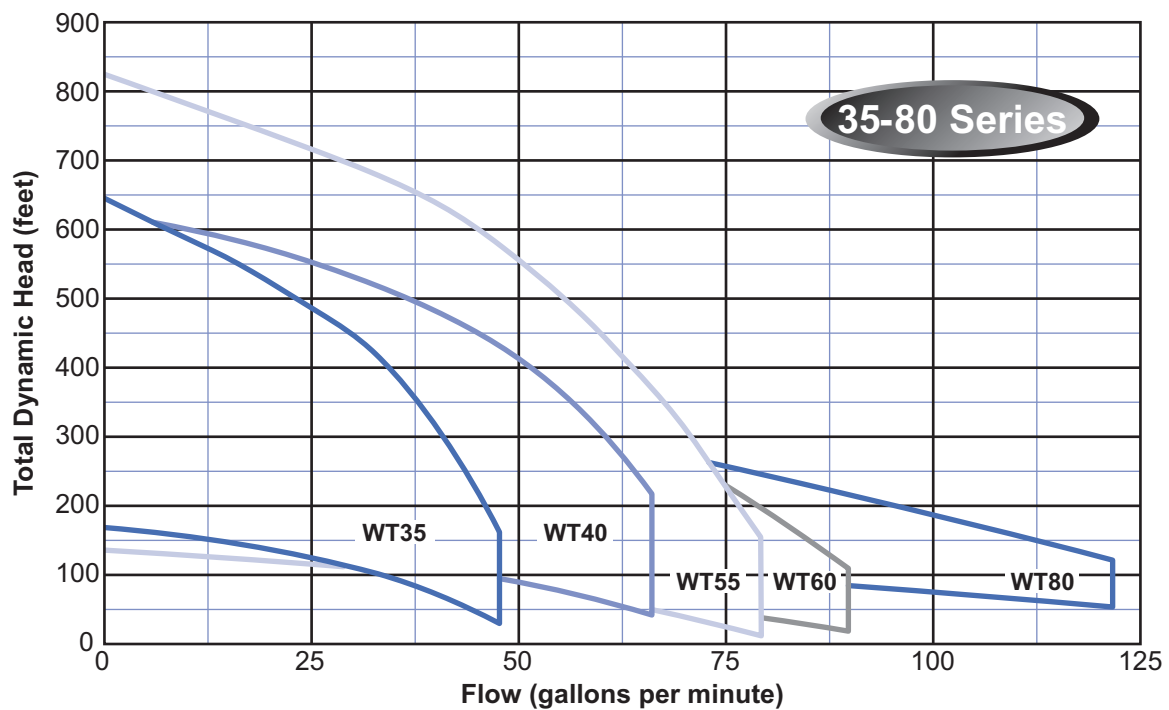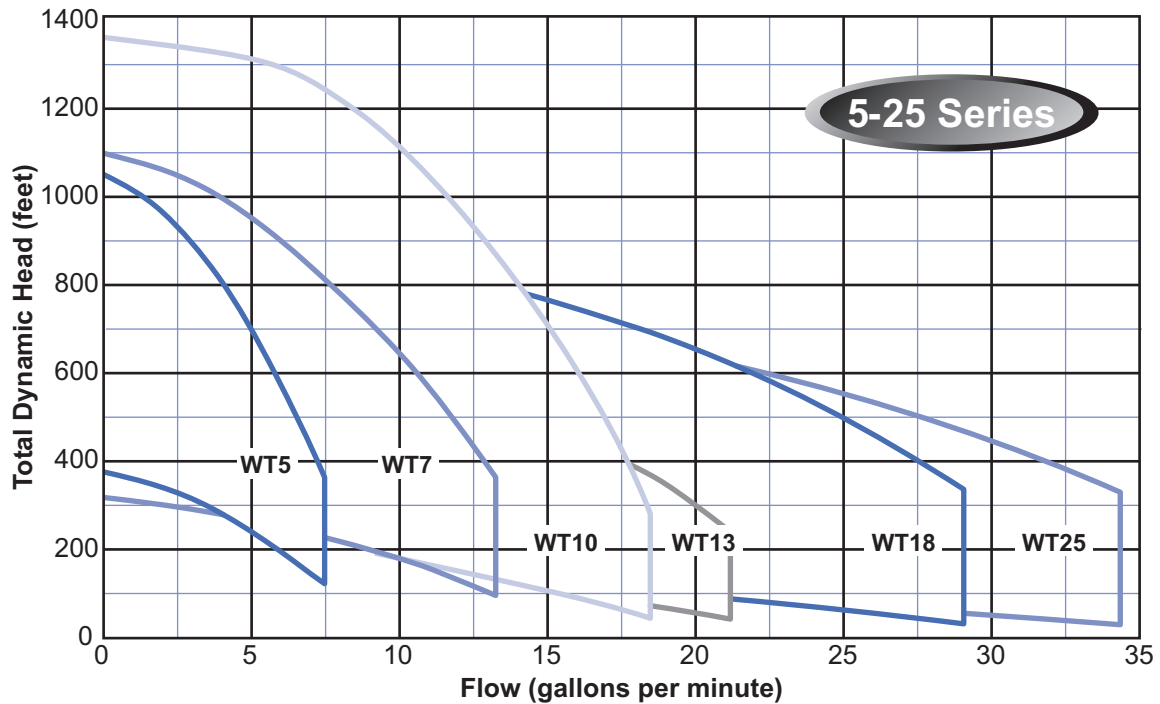



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

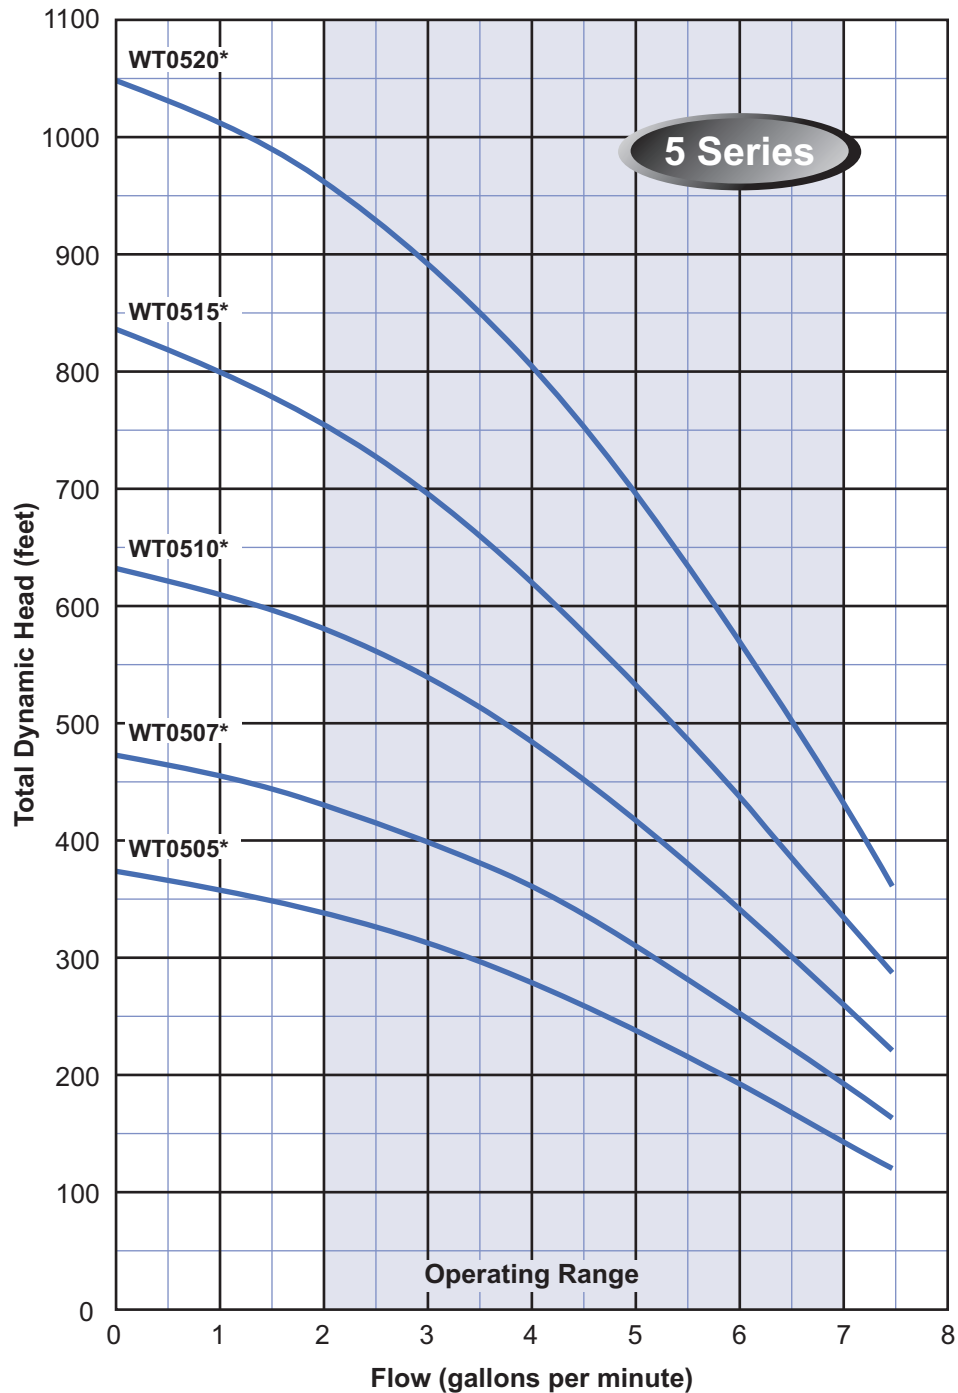


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

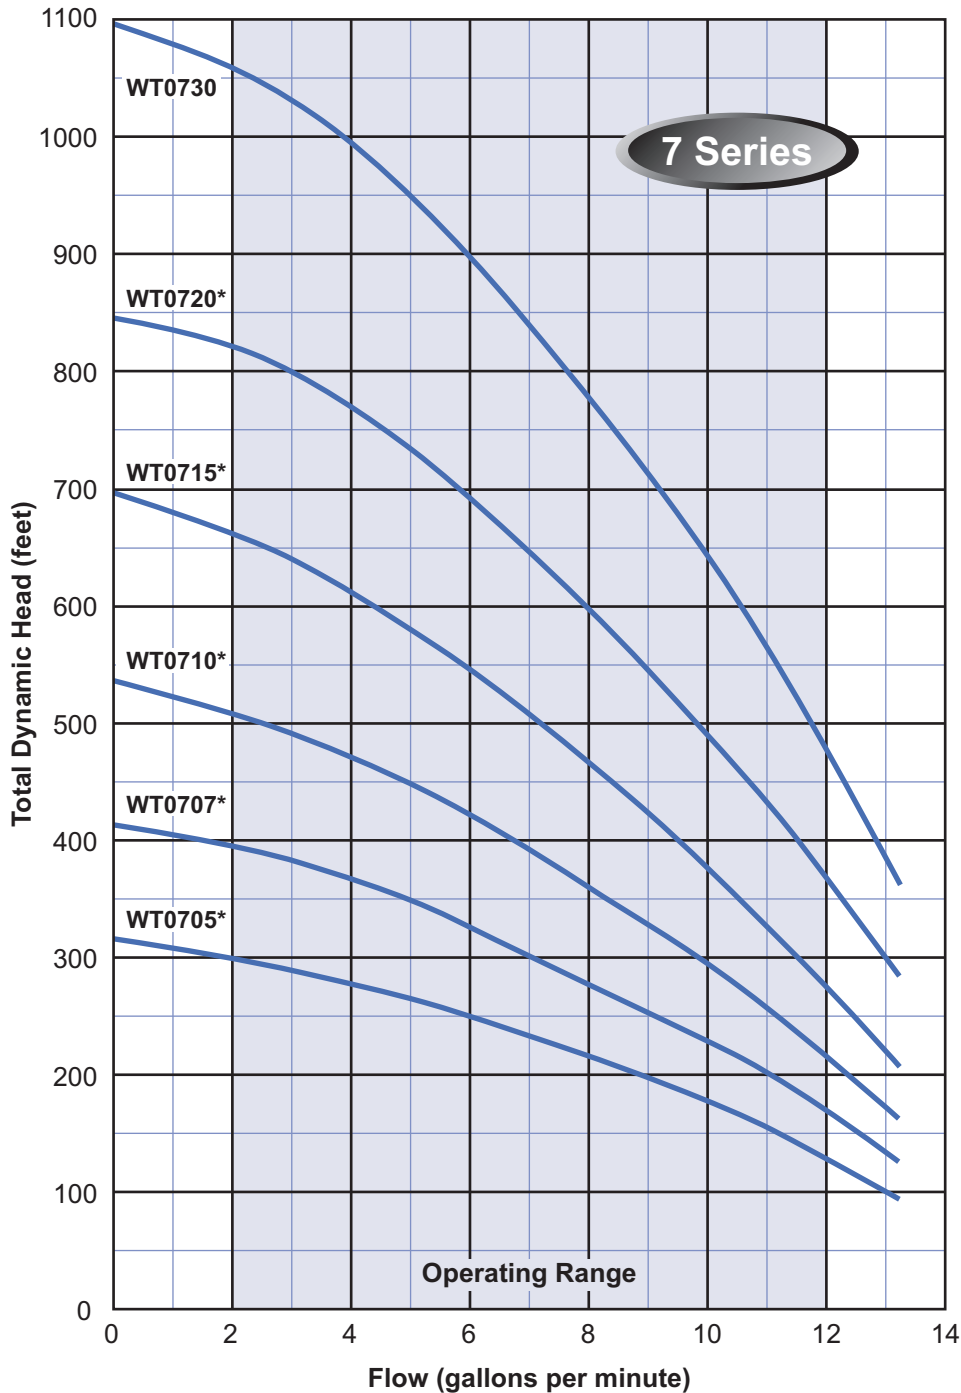

MODEL NO.: WT07152C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 15 ÷ 10 = 1.5 or 1 1/2HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

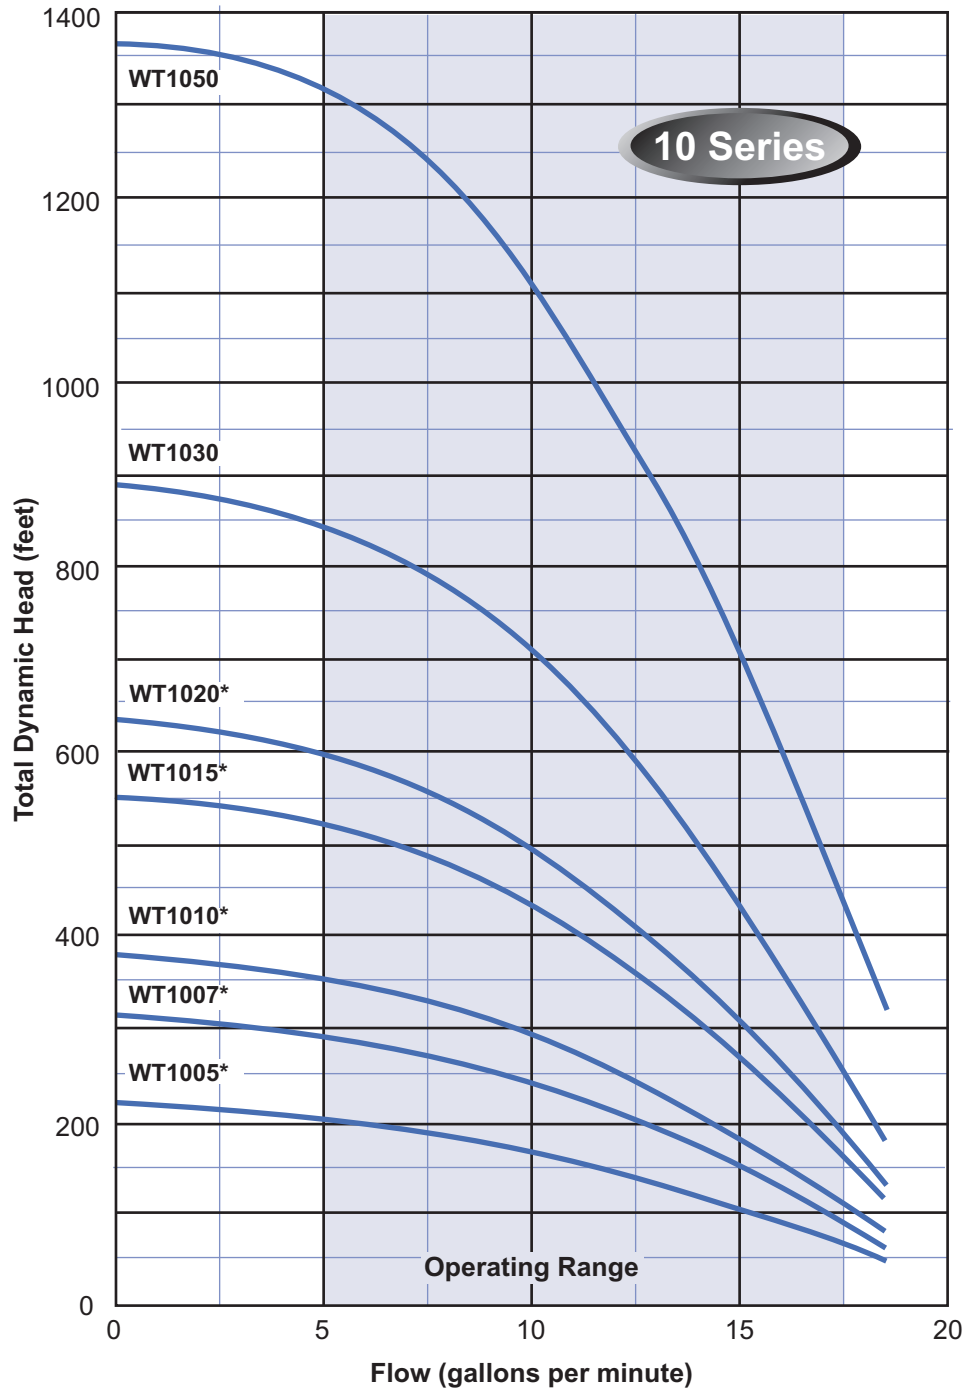

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

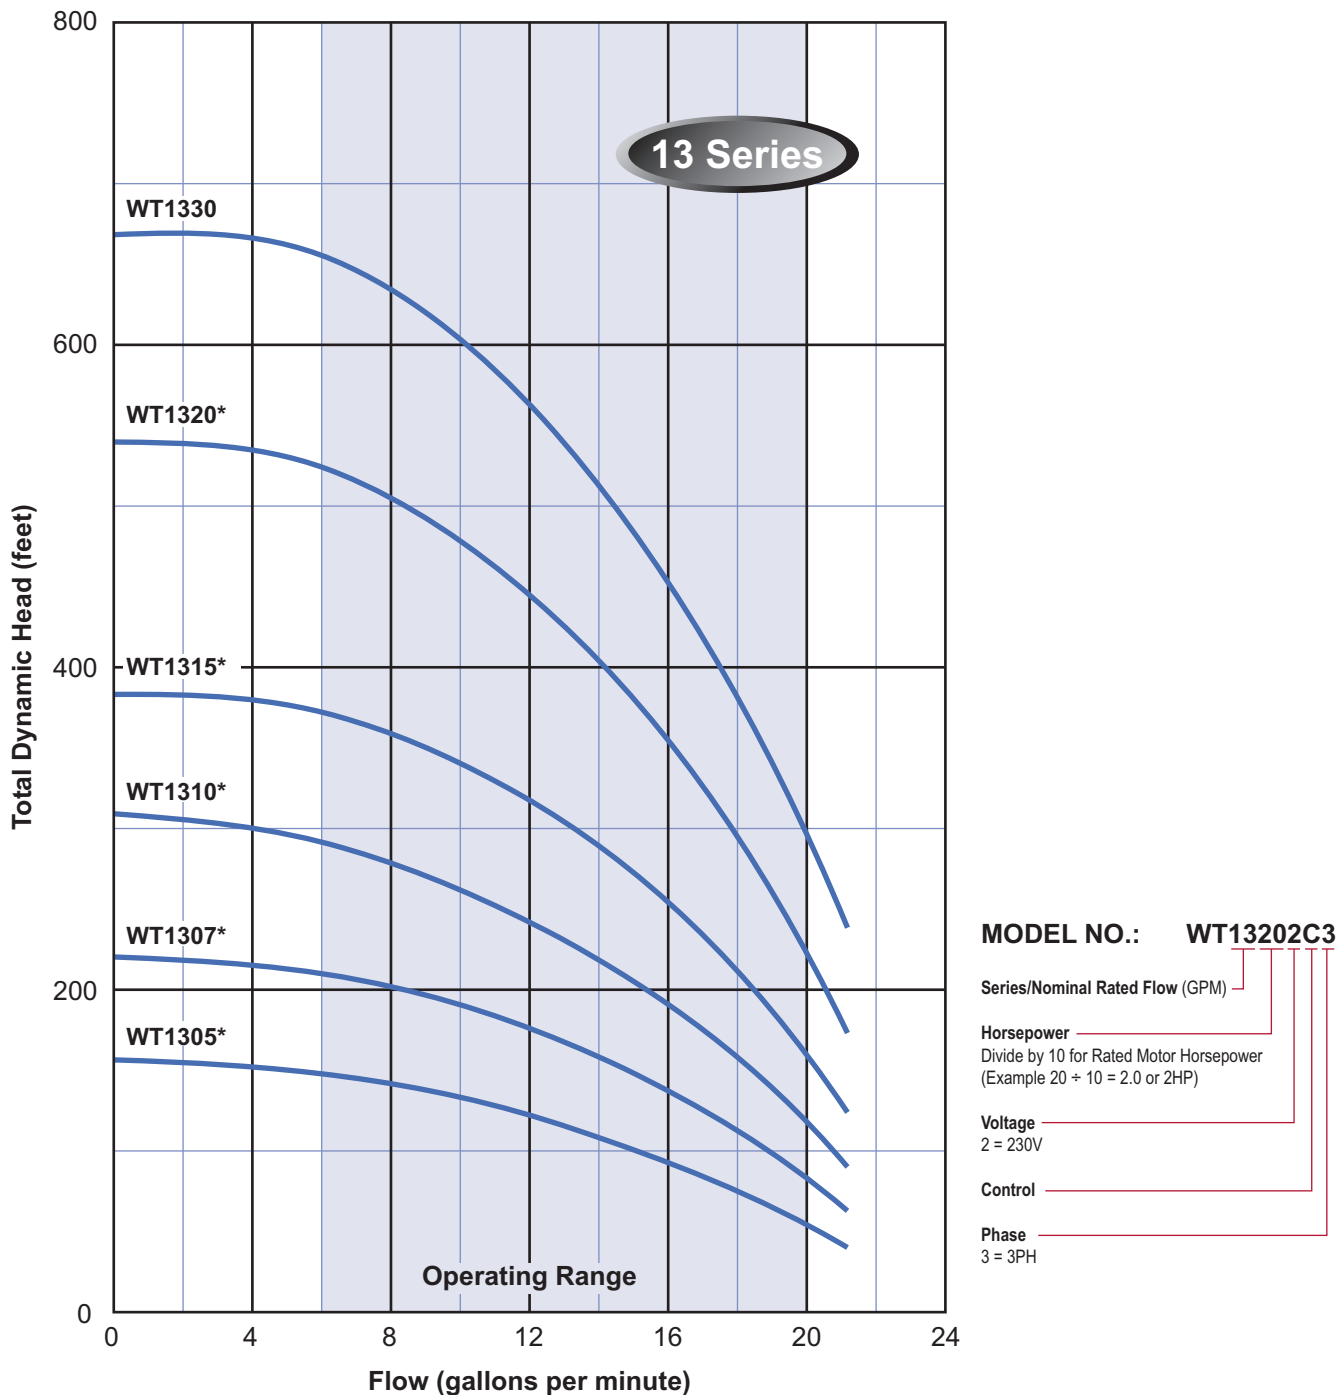


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

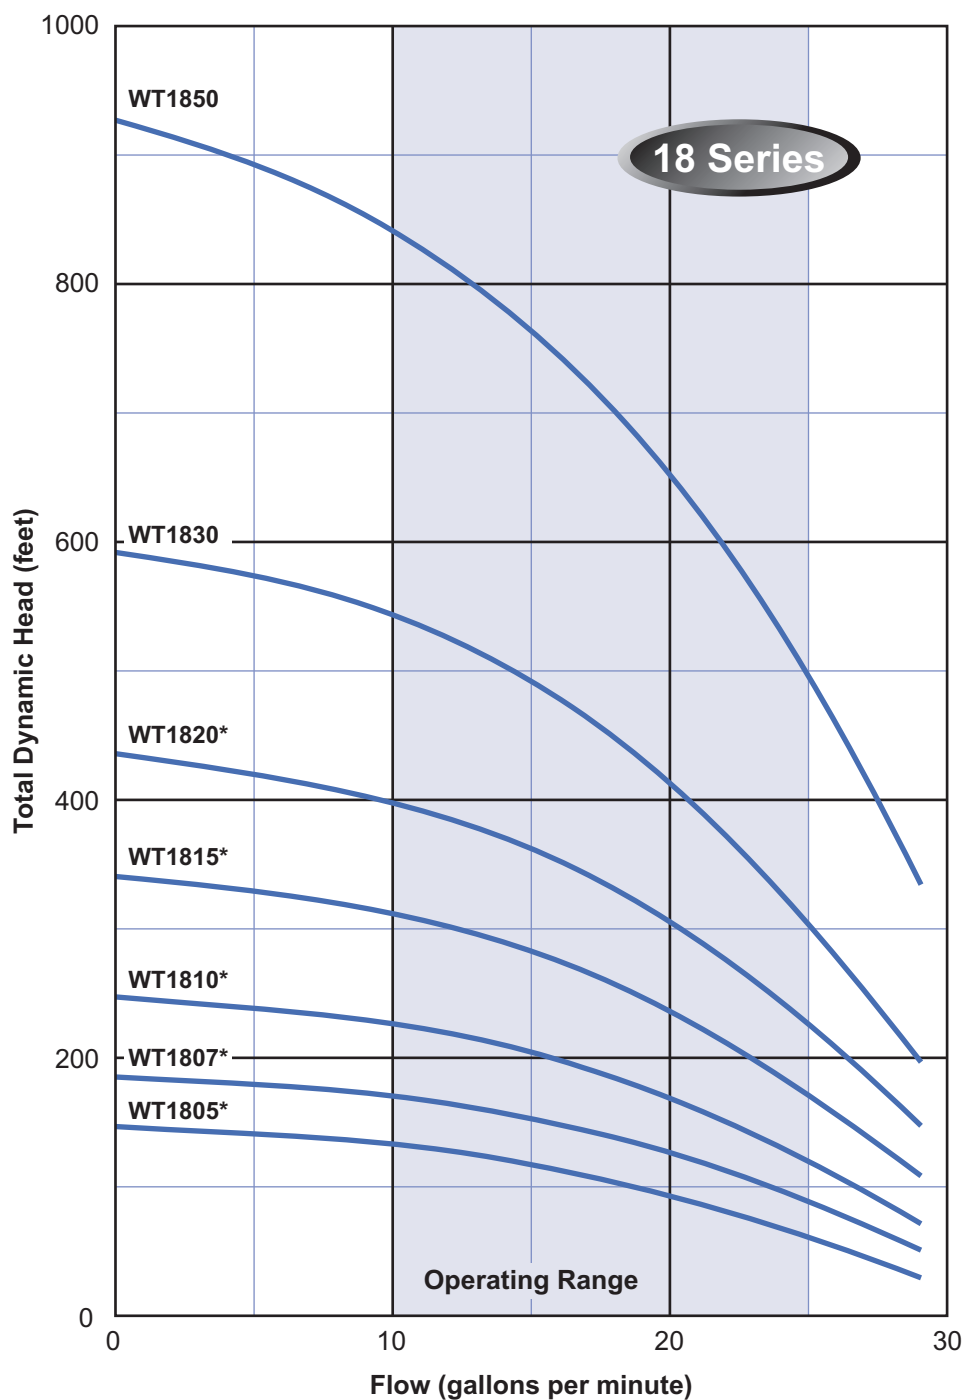

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

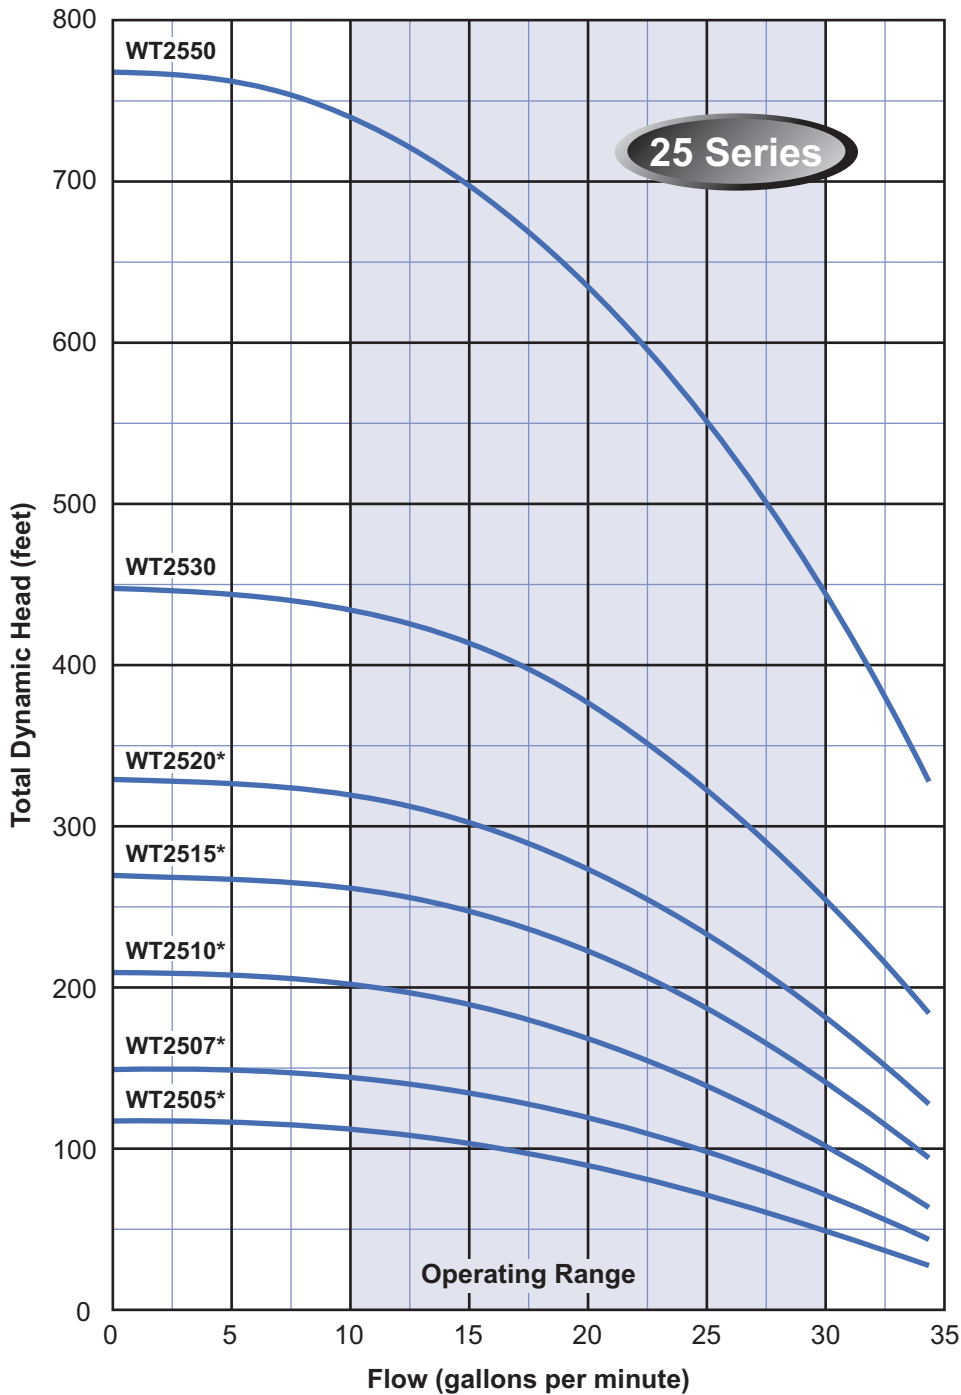

MODEL NO.: WT25202C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example $20 \div 10 = 2.0$ or 2HP)

Voltage
2 = 230V

Control

Phase
3 = 3PH

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

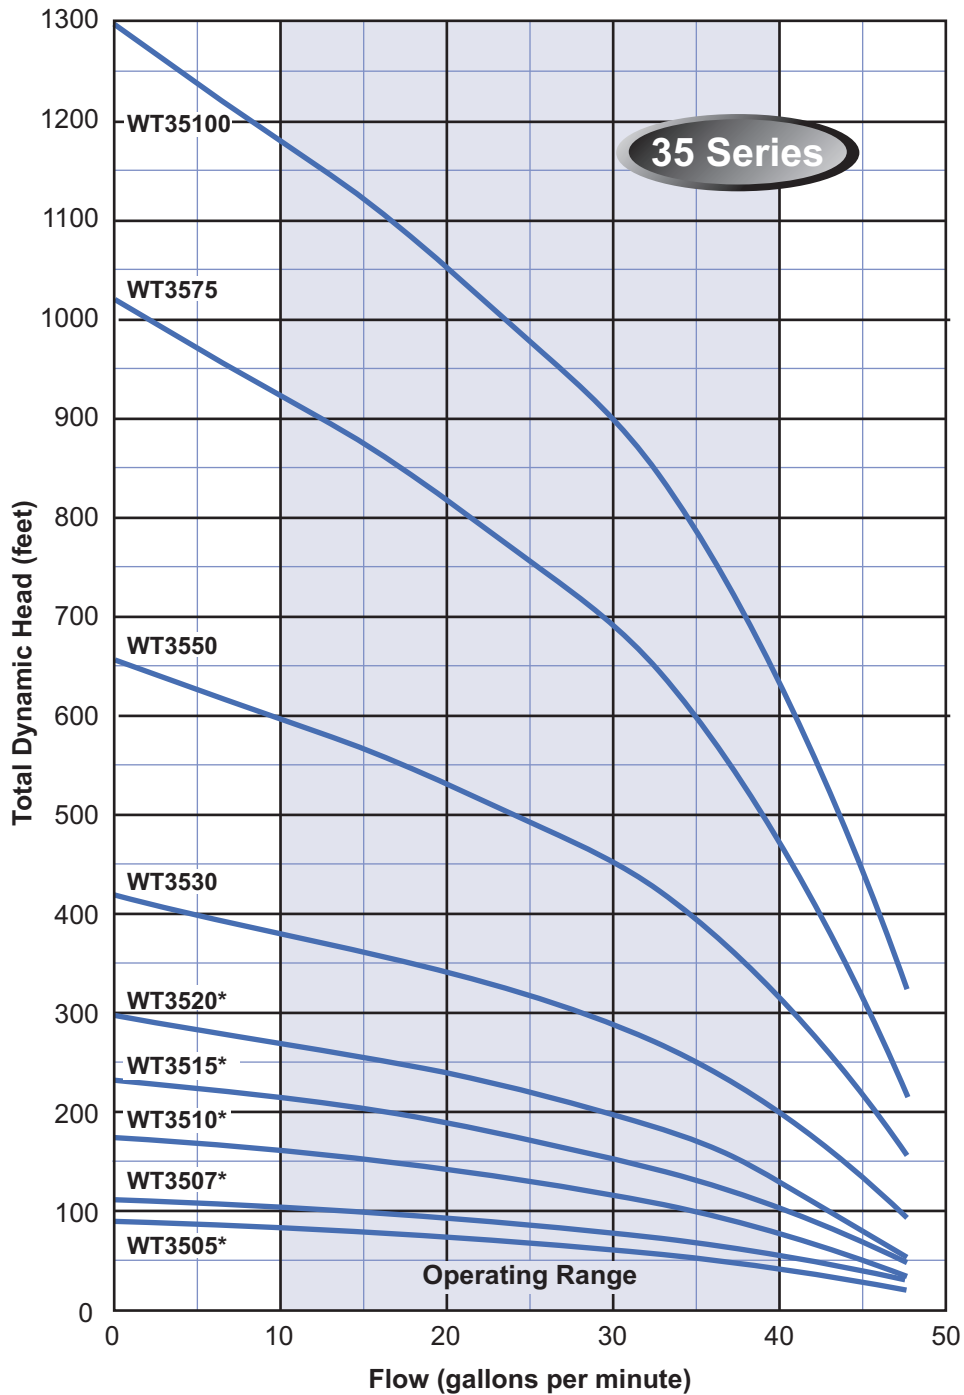


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBMERSIBLE CURVES

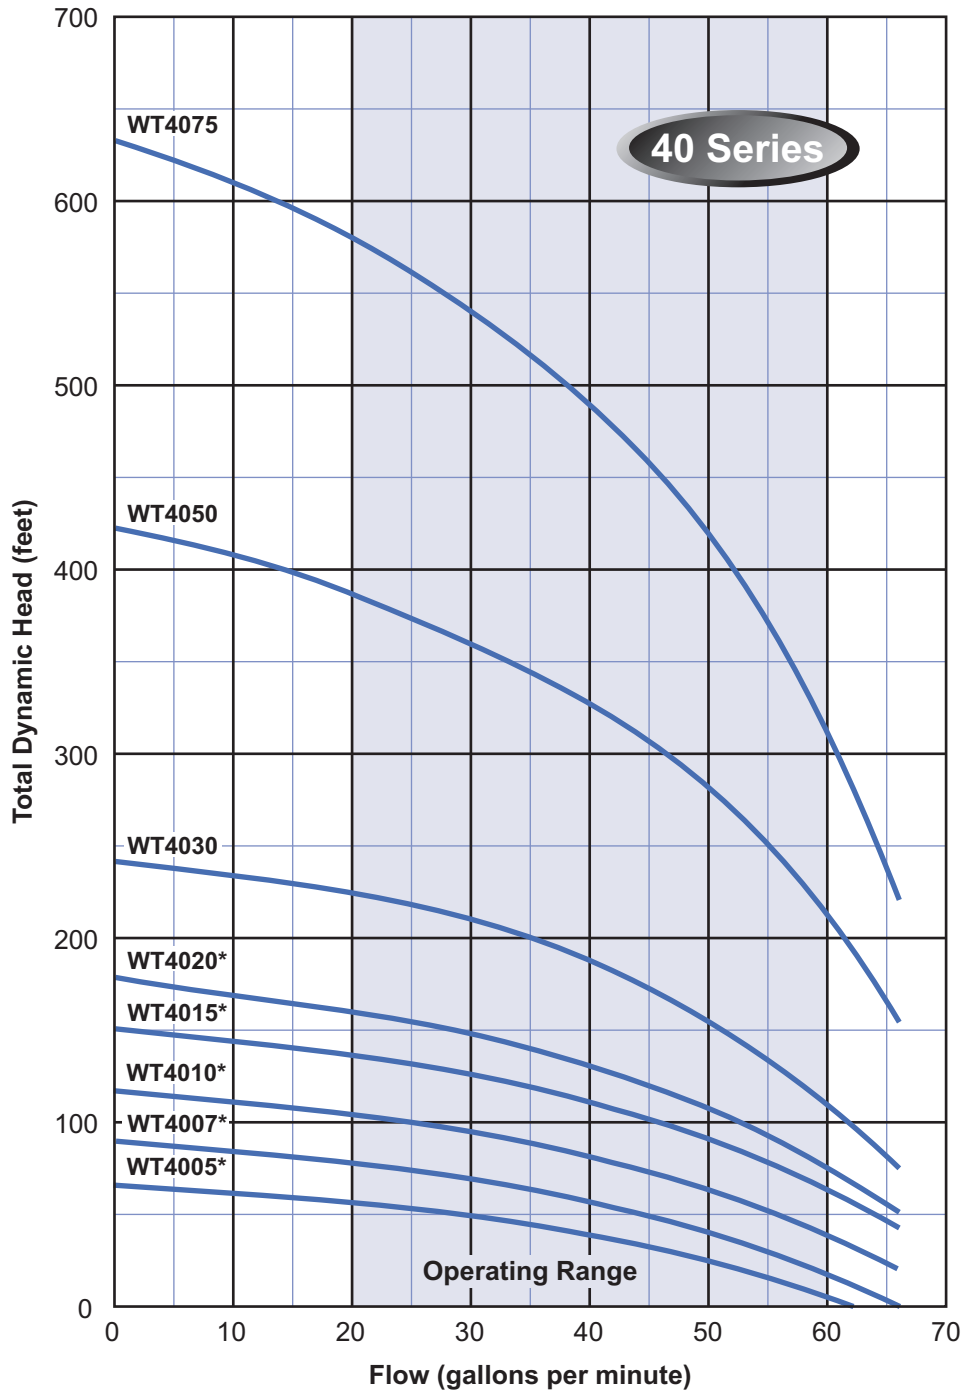

MODEL NO.: WT40502C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 50 ÷ 10 = 5.0 or 5HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4 INCH SUBMERSIBLE CURVES

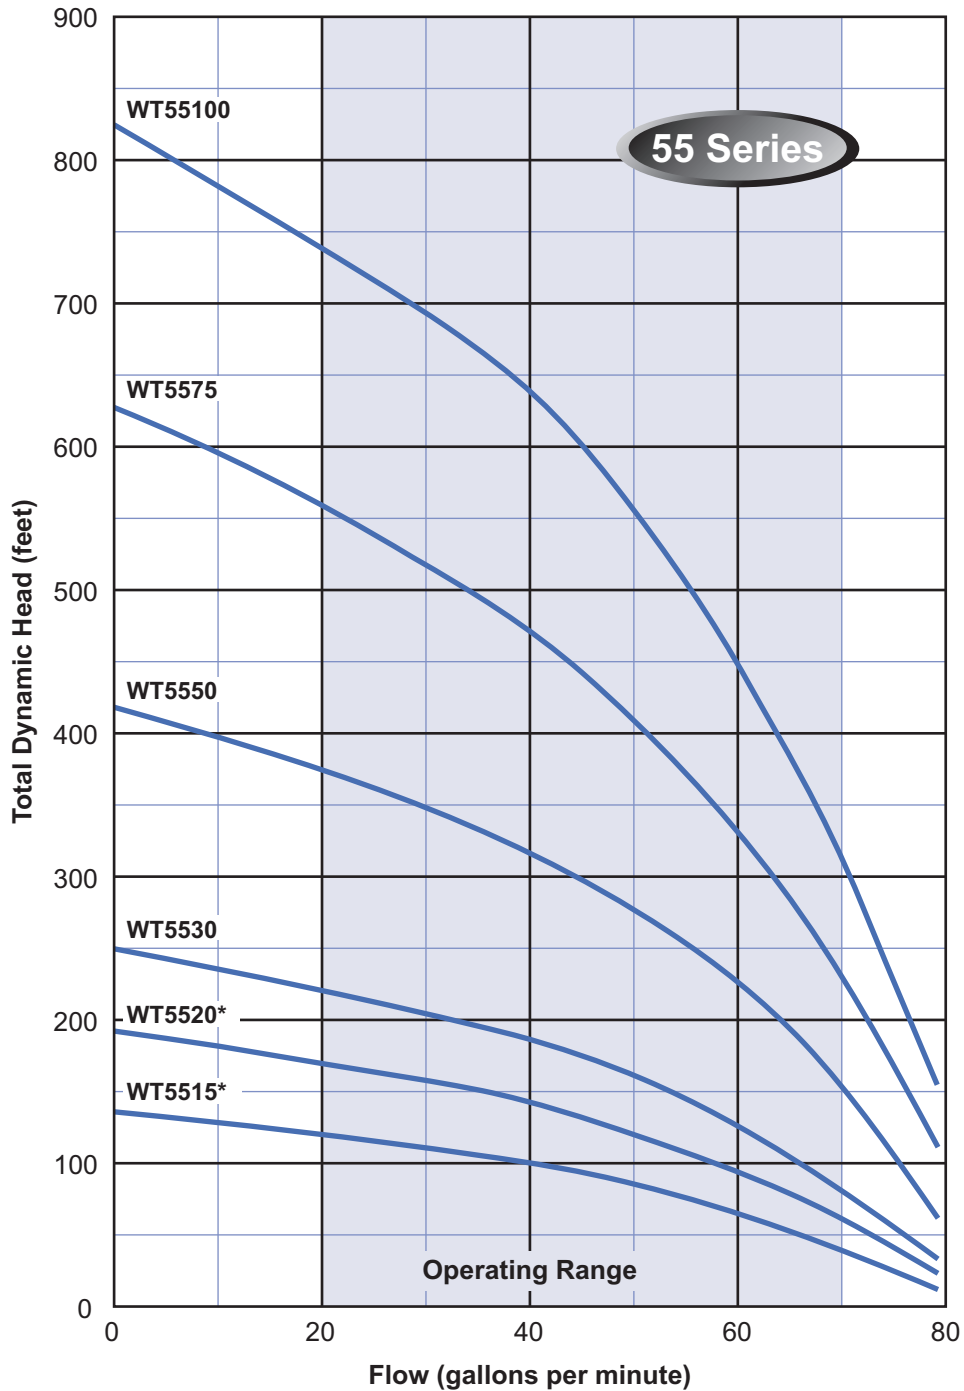

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4 INCH SUBMERSIBLE CURVES

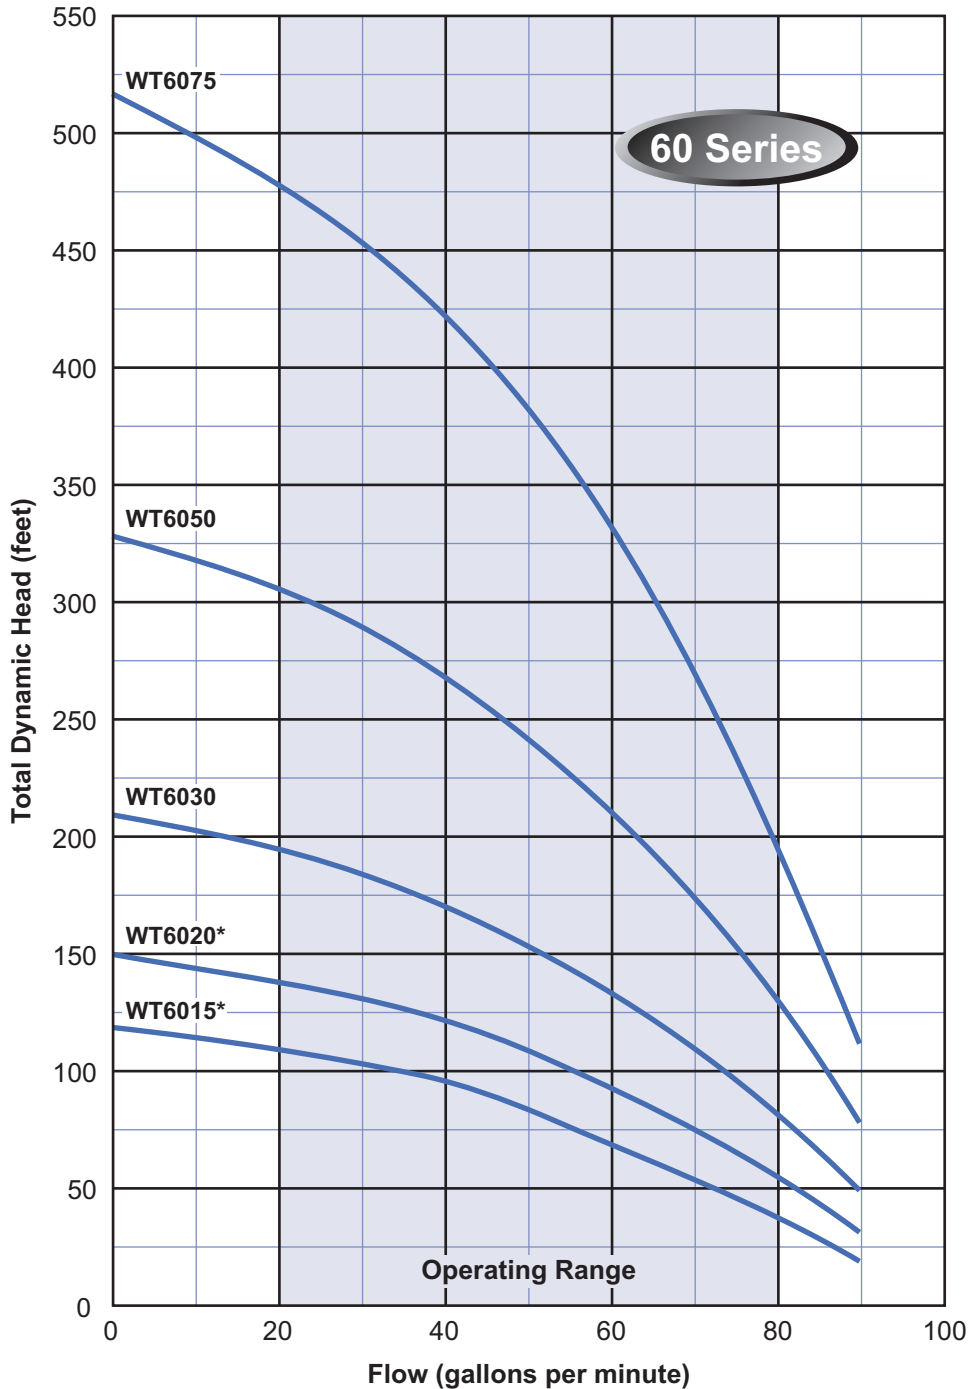

MODEL NO.: WT60502C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 50 ÷ 10 = 5.0 or 5HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4 INCH SUBMERSIBLE CURVES

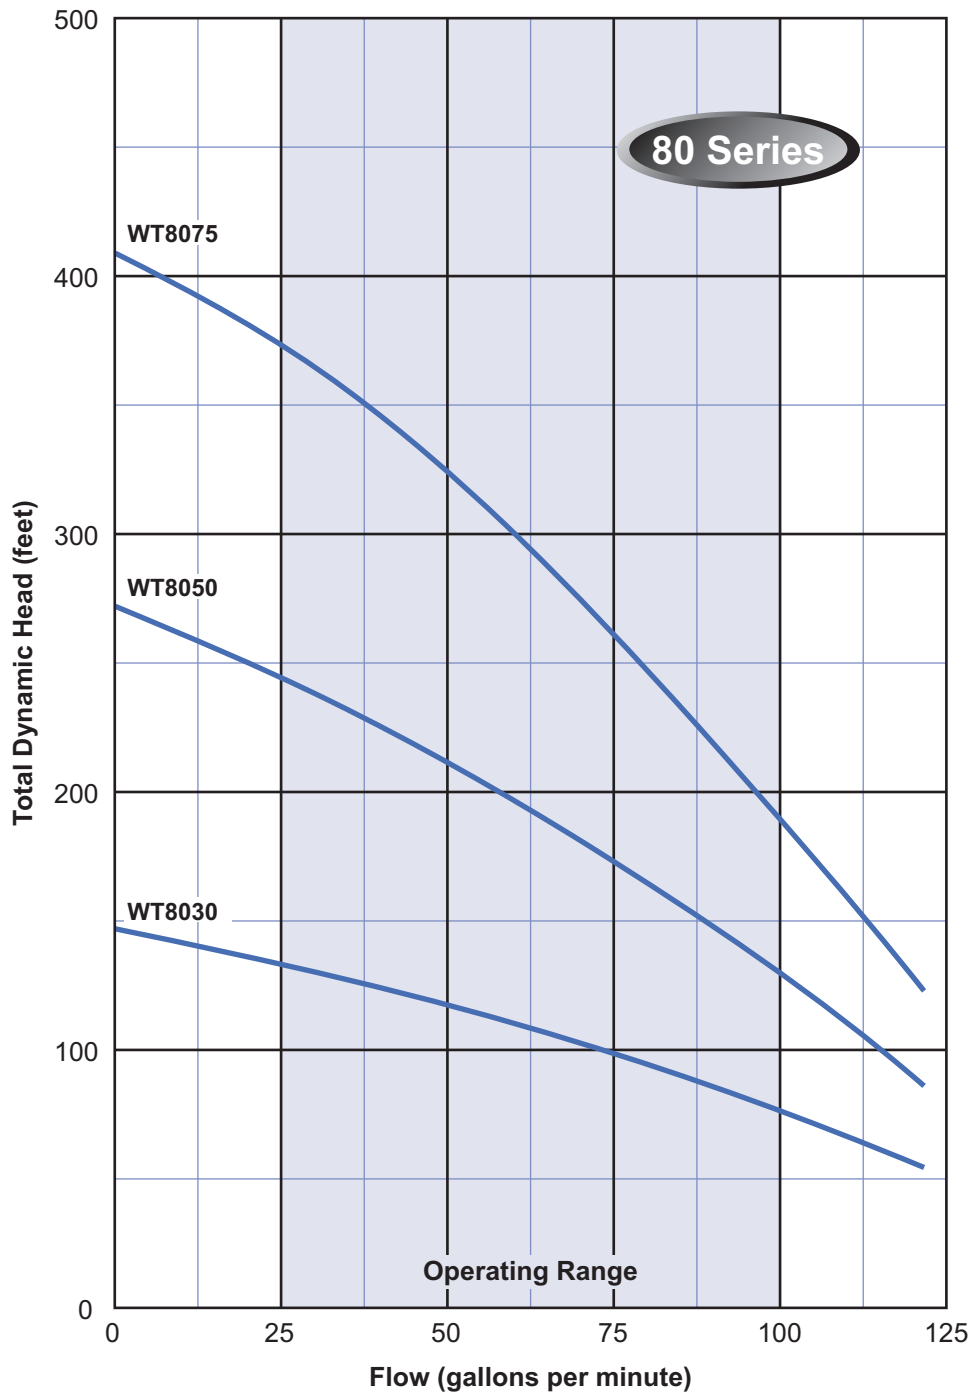

Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM

Constant "City-Like" Water Pressure

The Webtrol **WT** Series SubDrive System is an innovative drive system that solves what has plagued rural homeowners for years, getting city-like (constant) water pressure from their wells. People moving from municipal to private water well systems tend to be unaware of two things, the need for a large pressure tank and the inherent pressure cycling present in a conventional water well system. In conventional well systems, pressure tank cycling (generally between 30 and 50 psi) causes major variations in water pressure. The Webtrol **WT** Series SubDrive System is a submersible pump/motor designed to maintain constant water pressure

using a standard 1.5 - 5 Hp Franklin Electric 3-phase motor, operating between 1800 RPM and 4800 RPM.

Webtrol's **WT** Series SubDrive System uses only four components:

- A) Standard pump/motor assembly.
- B) SubDrive controller.
- C) Pressure tank
- D) Franklin Electric pressure sensor.

The **WT** Series SubDrive System concept is really pretty simple. Standard water system motors are single speed. The SubDrive system is designed to vary the speed (rpm) of the motor to give you variable Hp from one motor. When you need more water, it runs faster. When you need less water, it runs at a slower speed while maintaining a constant water pressure.



CP Pack
Get all the parts
in one box!







Powered By

Franklin Electric



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

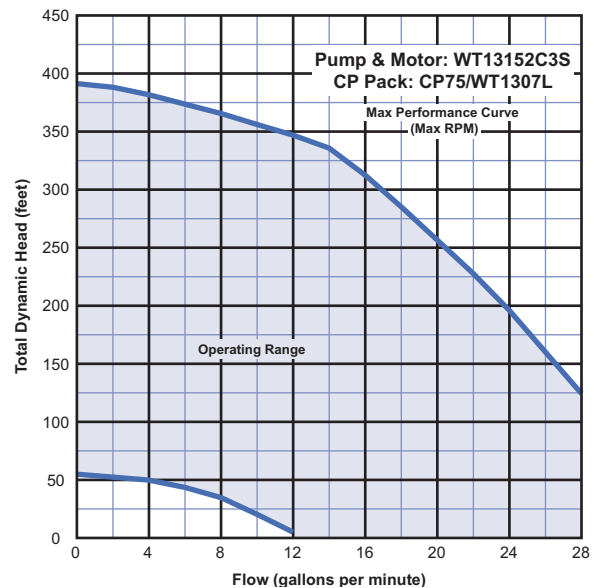
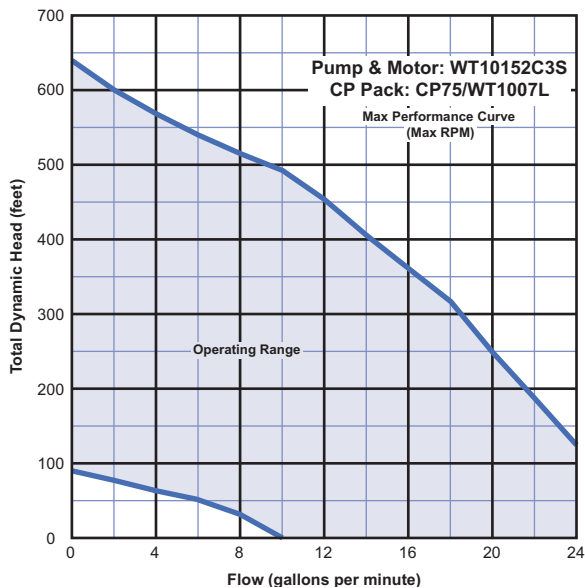
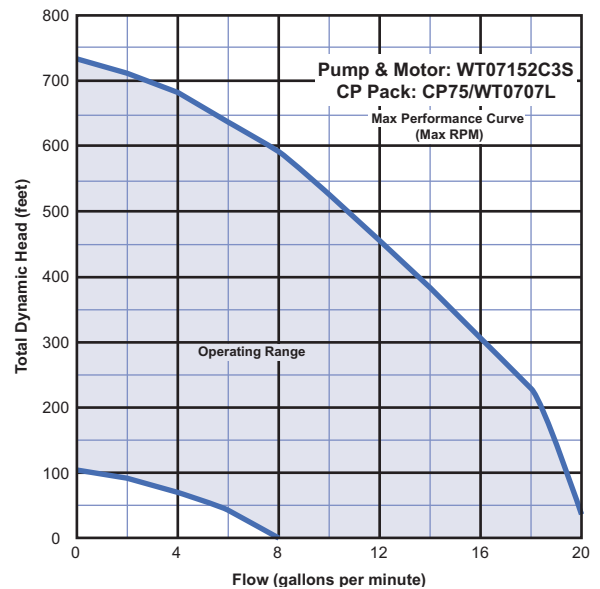
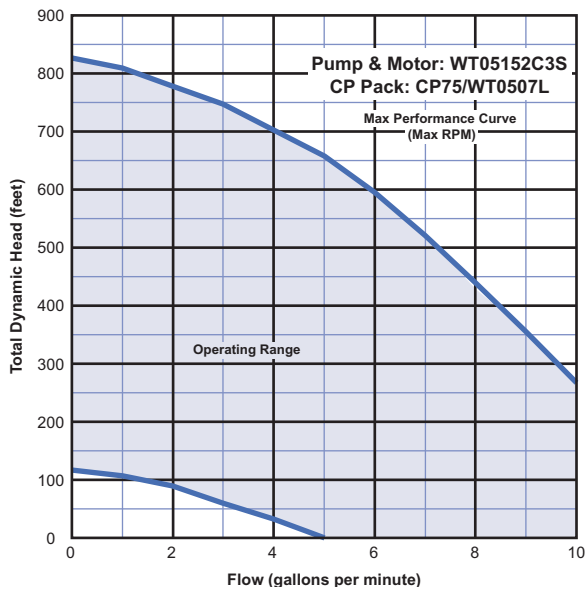


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

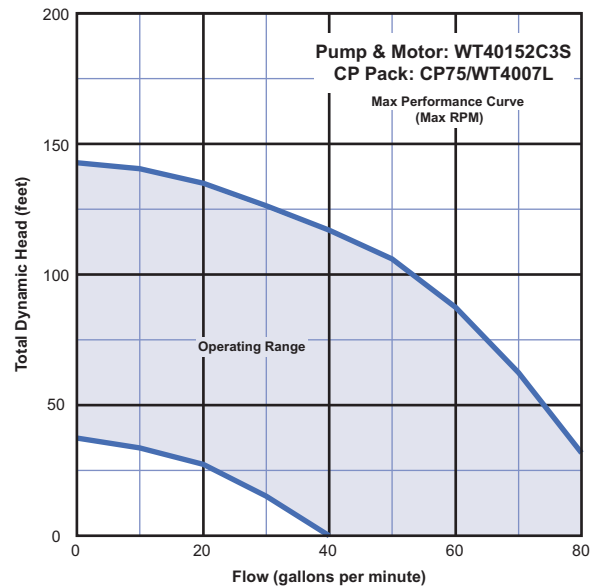
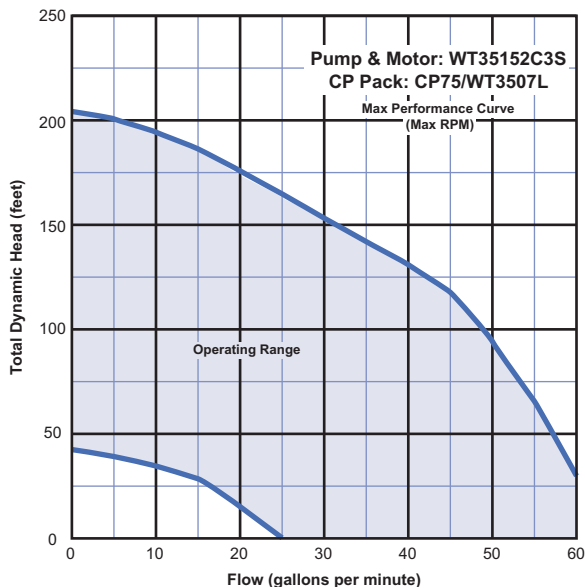
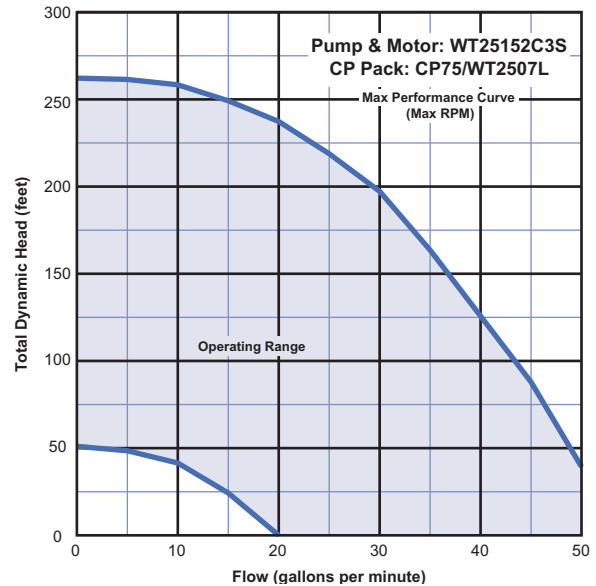
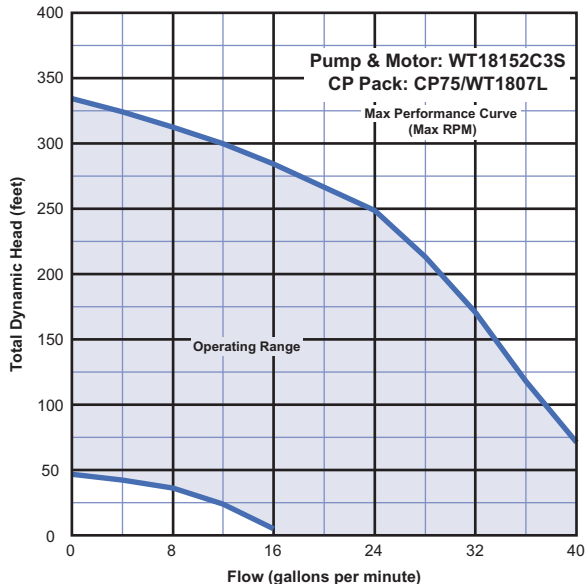


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

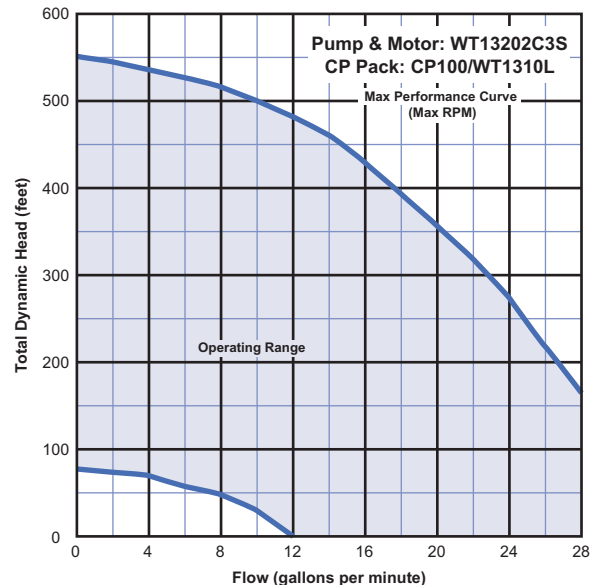
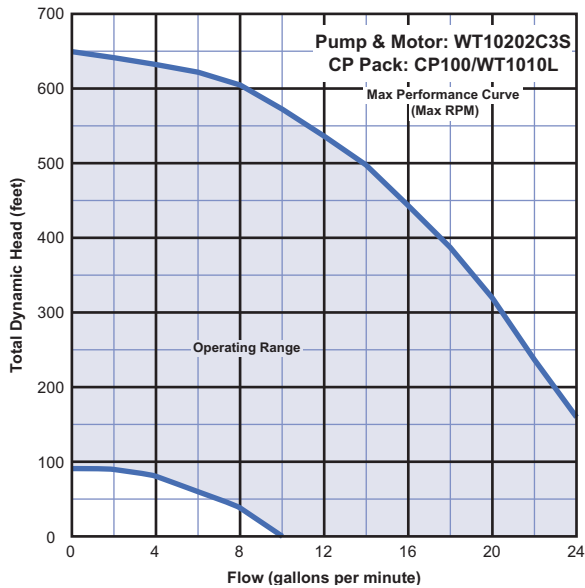
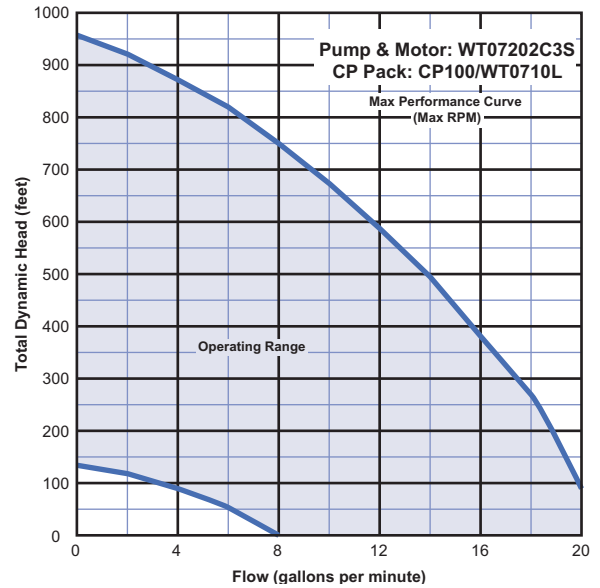
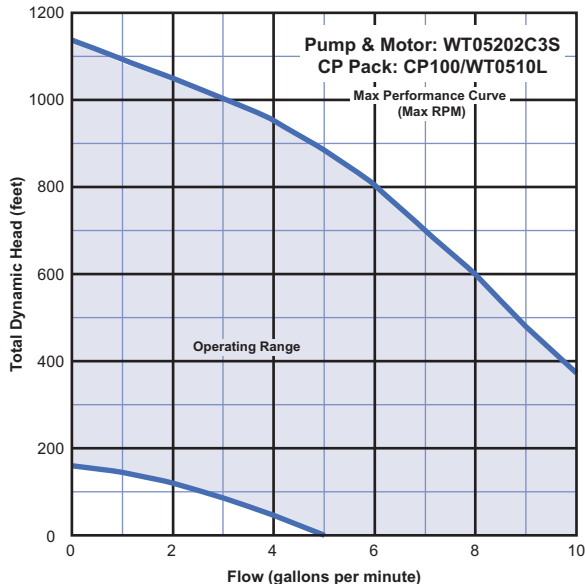


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

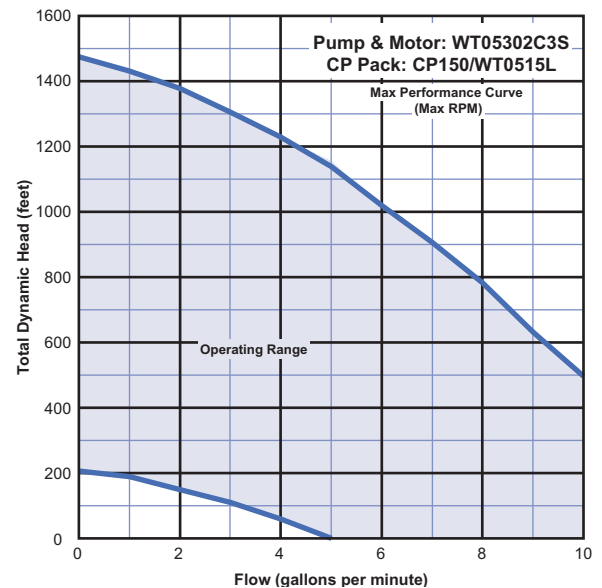
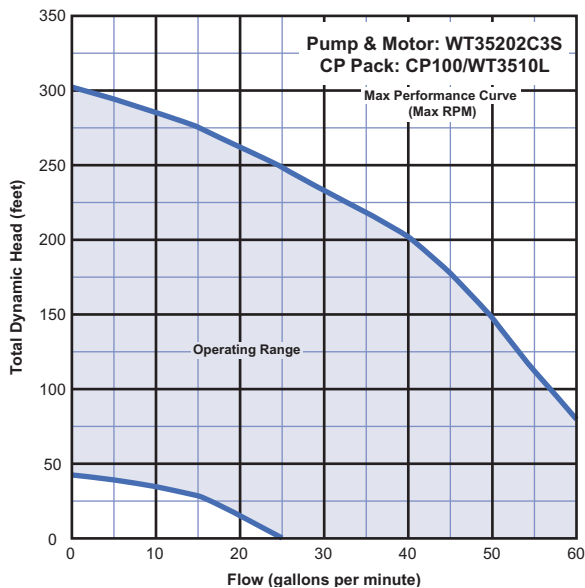
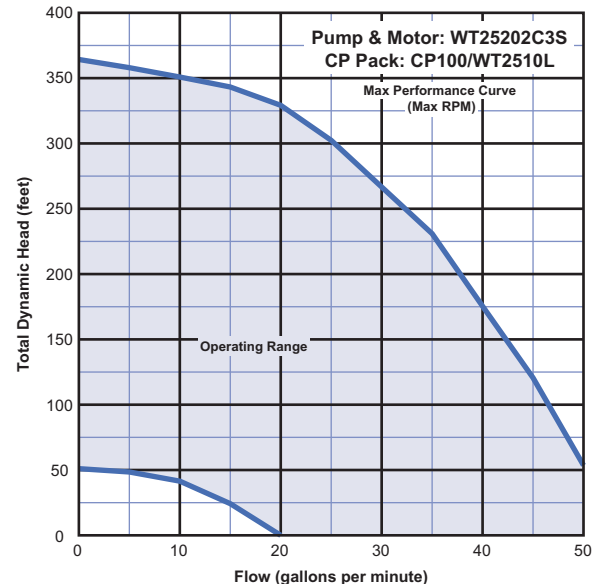
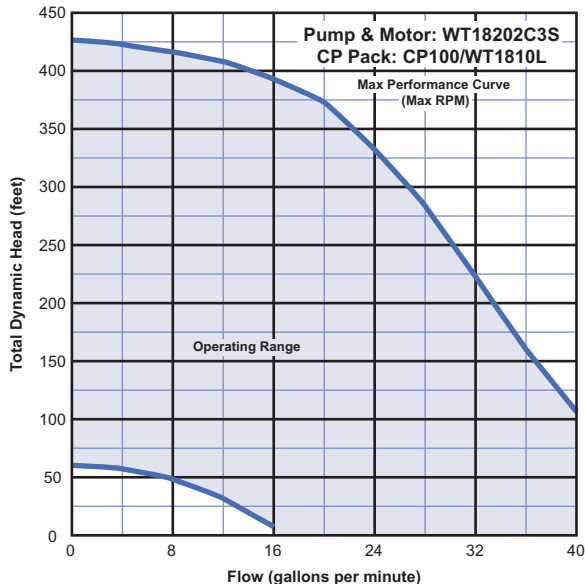


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

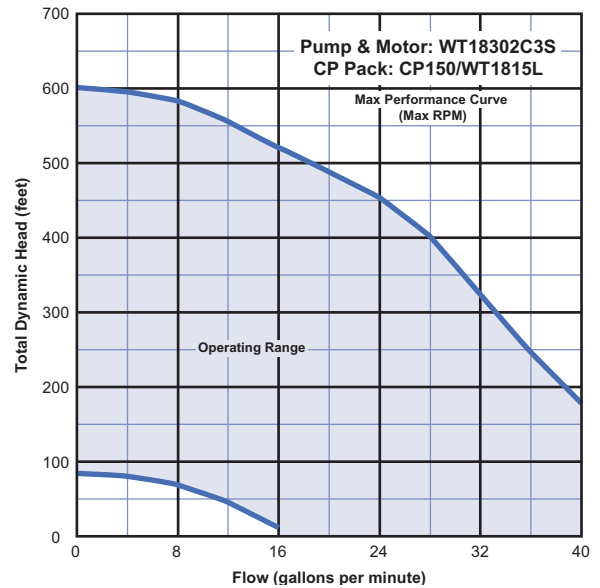
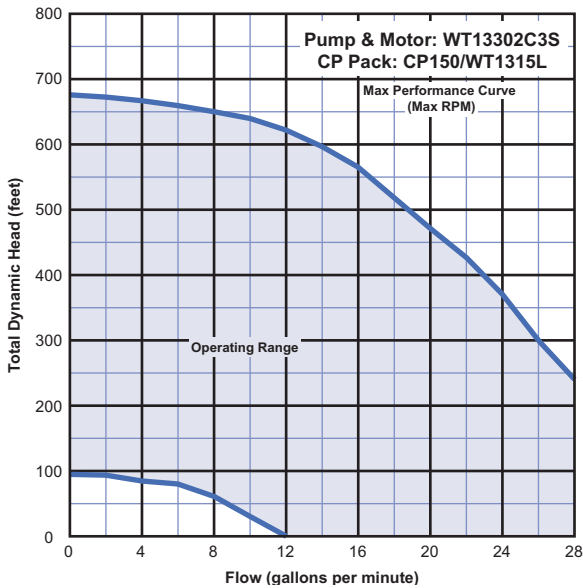
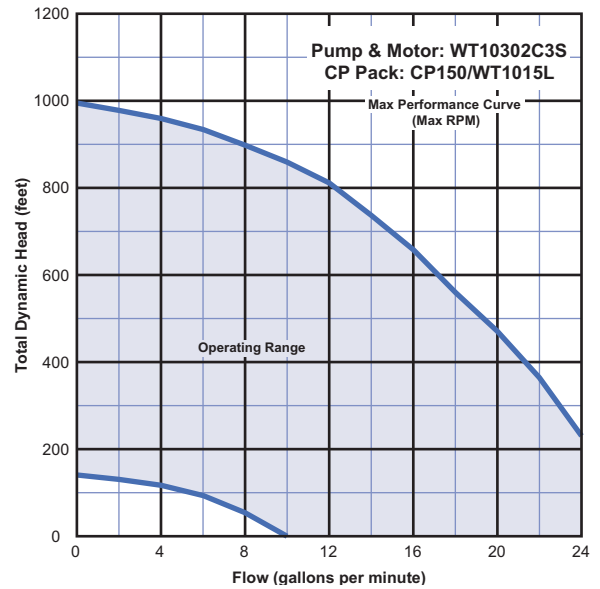
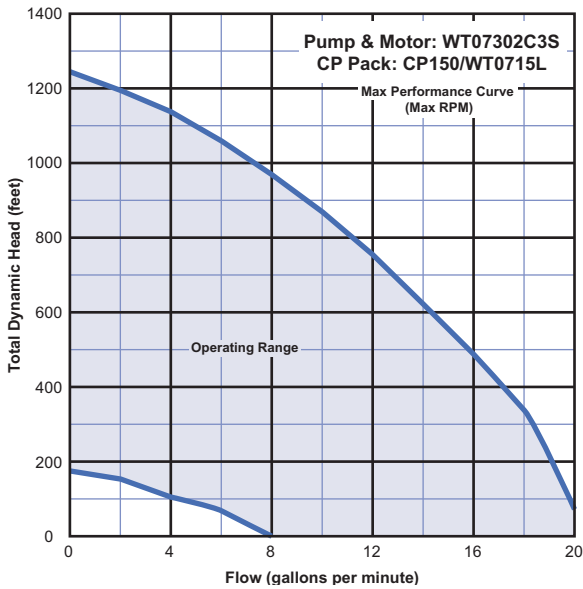


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

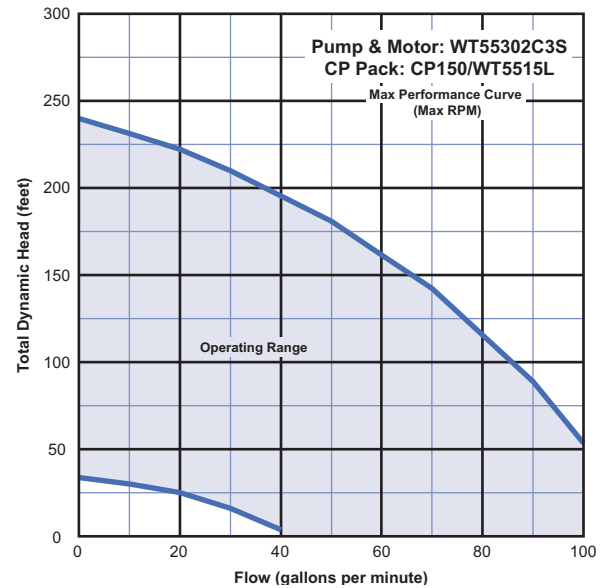
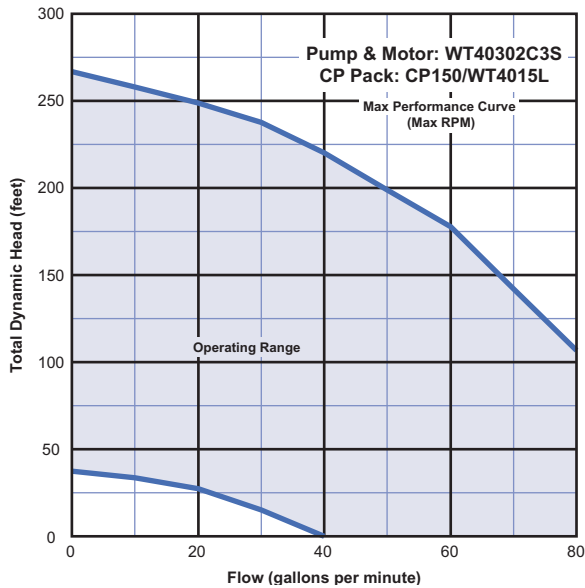
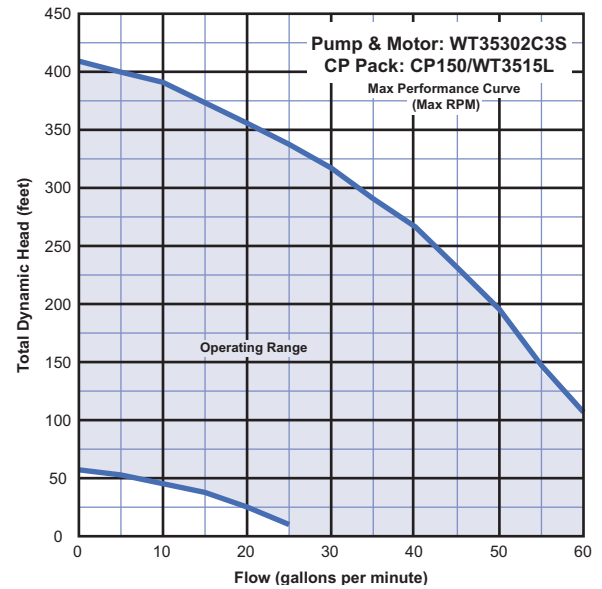
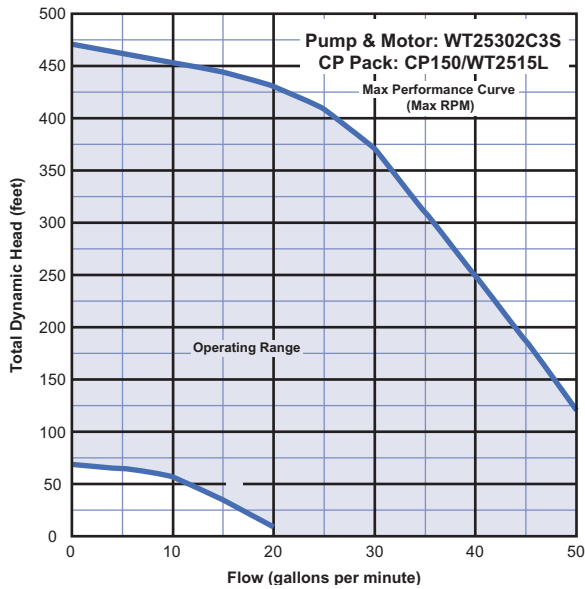


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

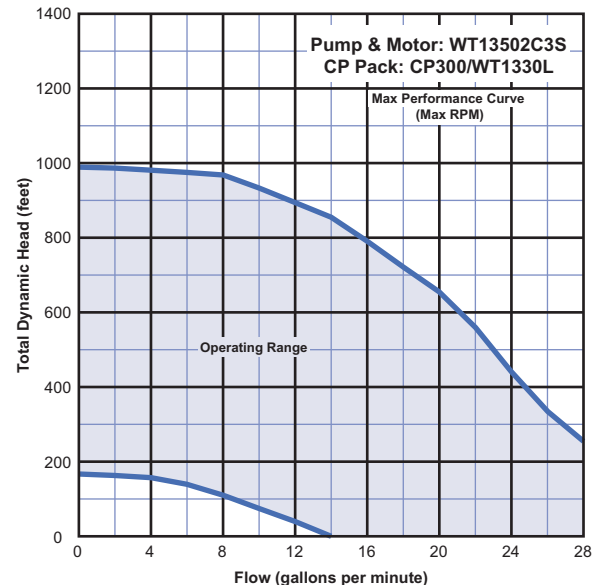
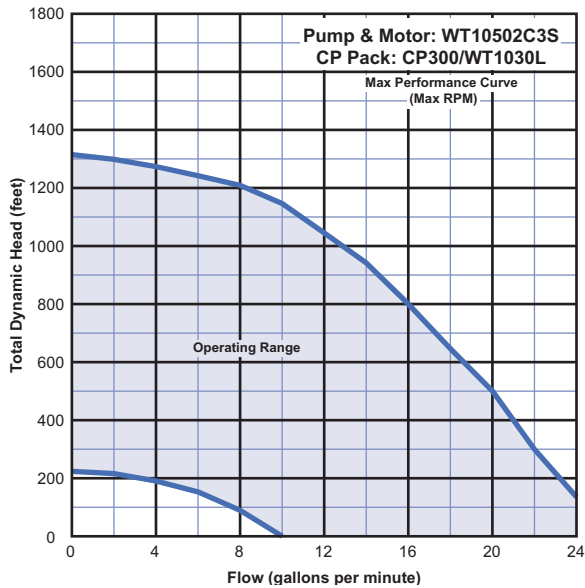
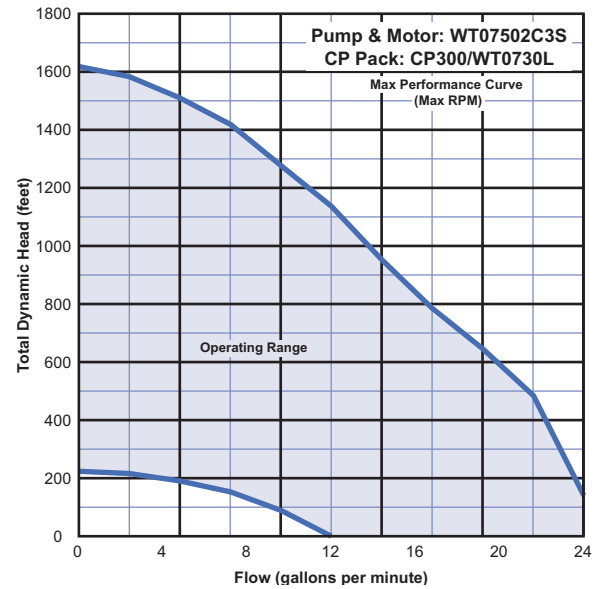
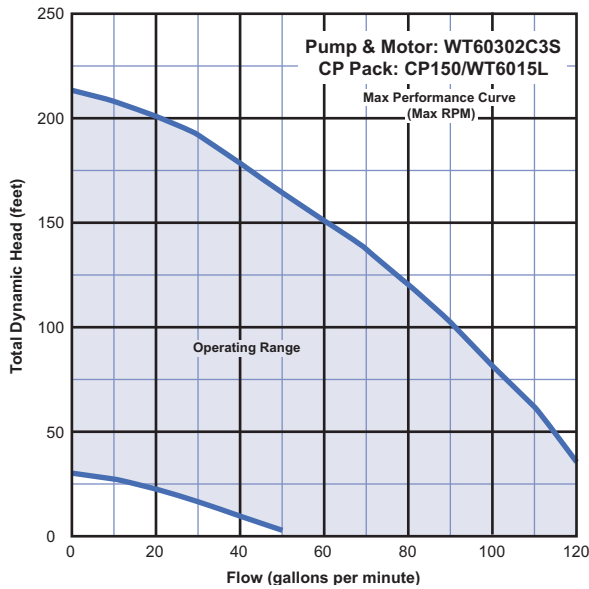


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

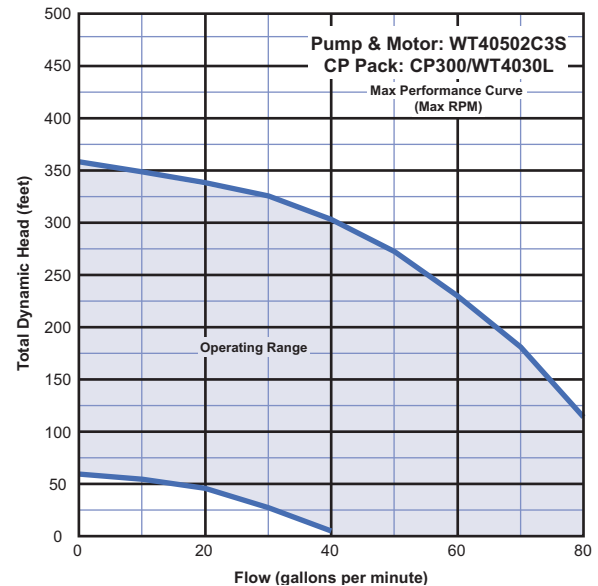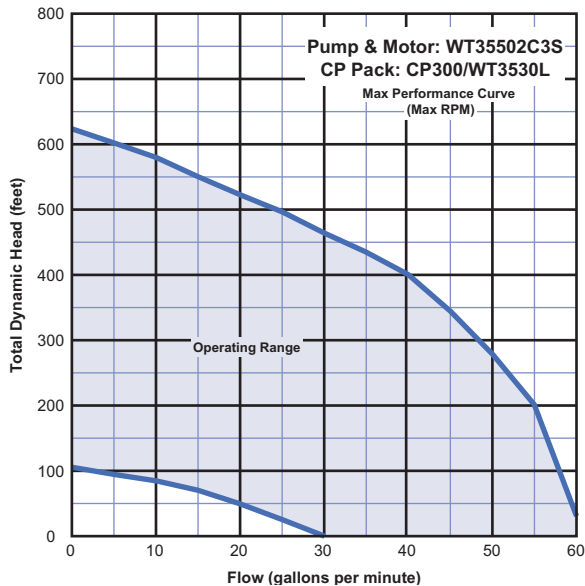
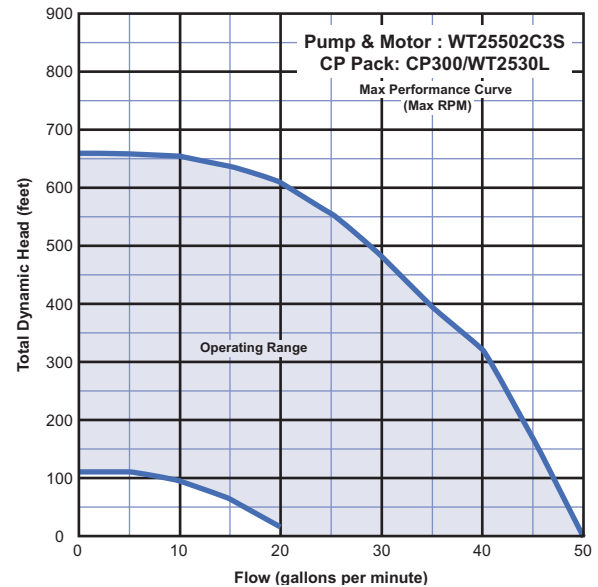
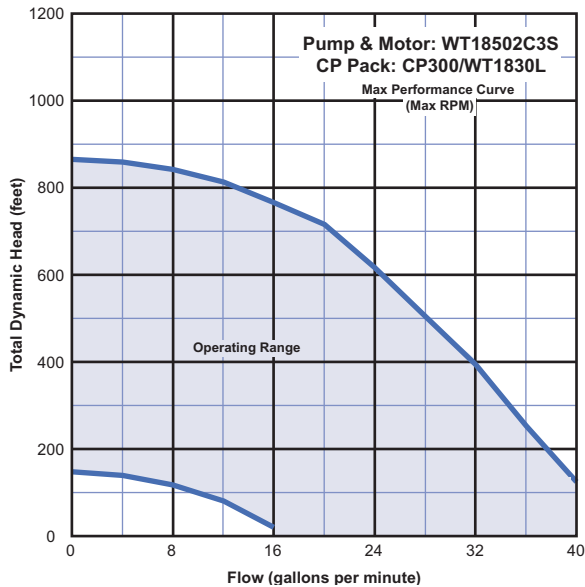


Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM CURVES

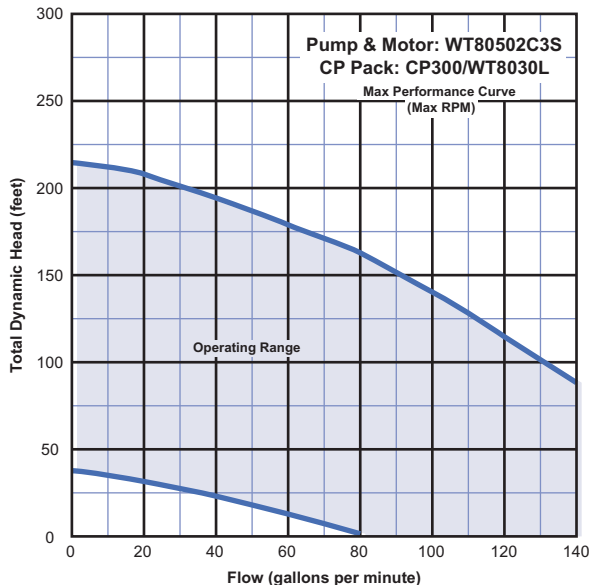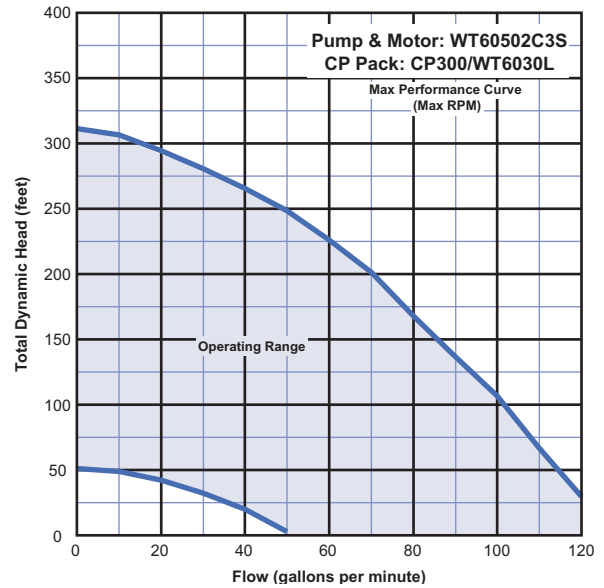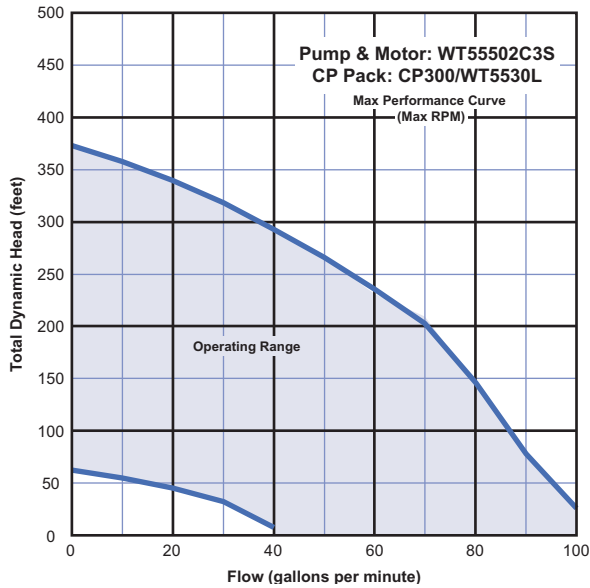

Total Dynamic Head is equal to vertical lift, maximum operating pressure and friction loss. These curves are for general guidance only, individual curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

4" WT SERIES SUBDRIVE SYSTEM

System Features and Benefits

- Easy Installation
- Provides constant "City-Like" water pressure under varying demands.
- Controller replaces pressure switch and has no moving parts.
- Adjustable pressure 25-80 lbs.
- Controller minimizes pressure cycling during long-running applications.
- Soft start/stop prevents water hammering and no in-rush of electric current at start-up.
- Controller converts single-phase 230V to three phase power, providing smooth and efficient motor operation.
- Ideal for geothermal systems or lawn irrigation.

The Controller

The heart of the system is the SubDrive controller that provides constant pressure using hi-tech electronics to drive a standard 3-phase motor according to the pressure demands of a highly accurate and durable pressure sensor. Input voltage to the controller is normal household 230VAC single phase power. (2 power wires plus ground). The output voltage to the motor is 3 phase power (3 power wires plus ground).

Installation is as simple as a control box, it should be mounted to a sturdy supporting structure such as a wall or post. As the pressure sensor monitors the pressure to maintain the "set" pressure, it will send a signal to the controller that will "in turn" adjust the motor speed (1800-4800 RPM) to meet the ever-changing demand for water.

Two lights on the SubDrive controller provide "system status". The green "Power On" light is steady green anytime the unit is powered, and flashes when the pump / motor assembly is running. The red "Fault" light is used with the unit's built-in diagnostics. The "Fault" light indicates what the problem is by flashing a given number of times.


The system also has the ability to "soft-start". Soft starting totally eliminates the normal system in-rush current. This prevents the "dimming light" syndrome that occurs on some water systems.


A Typical Webtrol WT Series SubDrive System consists of only four components

- 1) Standard WT Series pump/3PH motor assembly.
- 2) SubDrive Controller.
- 3) Pressure Tank
- 4) Franklin Electric pressure sensor.

Minimum Pressure Tank Size (Total Capacity)		
Pump Flow Rating	Controller Model	Minimum Tank Size
Less than 12 GPM	SubDrive 75 / 15	2 gallons
	SubDrive 100 / 20	4 gallons
	SubDrive 150 / 30	4 gallons
	SubDrive 300	8 gallons
12 GPM or higher	SubDrive 75 / 15	4 gallons
	SubDrive 100 / 20	8 gallons
	SubDrive 150 / 30	8 gallons
	SubDrive 300	20 gallons

Note: The SubDrive controller is intended for indoor use and for operation in ambient temperature up to 104 degrees F. The electronics inside the controller are air cooled. As a result, there should be at least 6 inches of clearance on each side and below the unit to allow room for air flow.

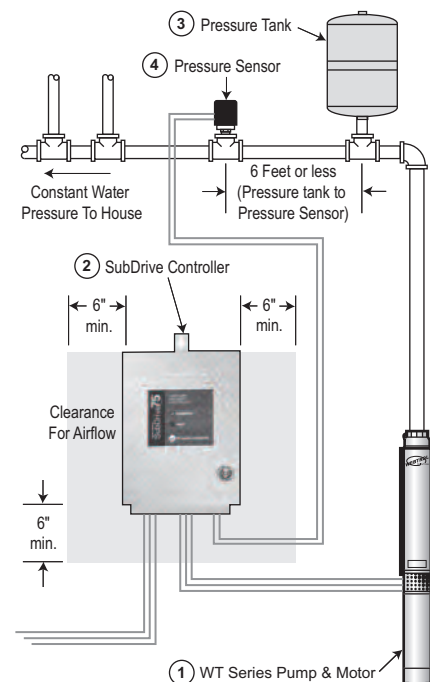





There when you need us most

6" WT SERIES SUBMERSIBLE

WTSeries

Webtrol's 6" WT Series

Webtrol's **WT** Series pumps offer superior performance and exceptional resistance to abrasives.

An excellent choice for residential, agricultural and commercial applications.

Specifications

- Flows from 20 to 80 GPM.
- Heads to 1,100 feet.
- HP range: 7 1/2 - 15 HP, 60Hz



Powered By

Franklin Electric

6" WT SERIES SUBMERSIBLE


Construction And Design Features






There when you need us most

6" WT SERIES SUBMERSIBLE CURVES

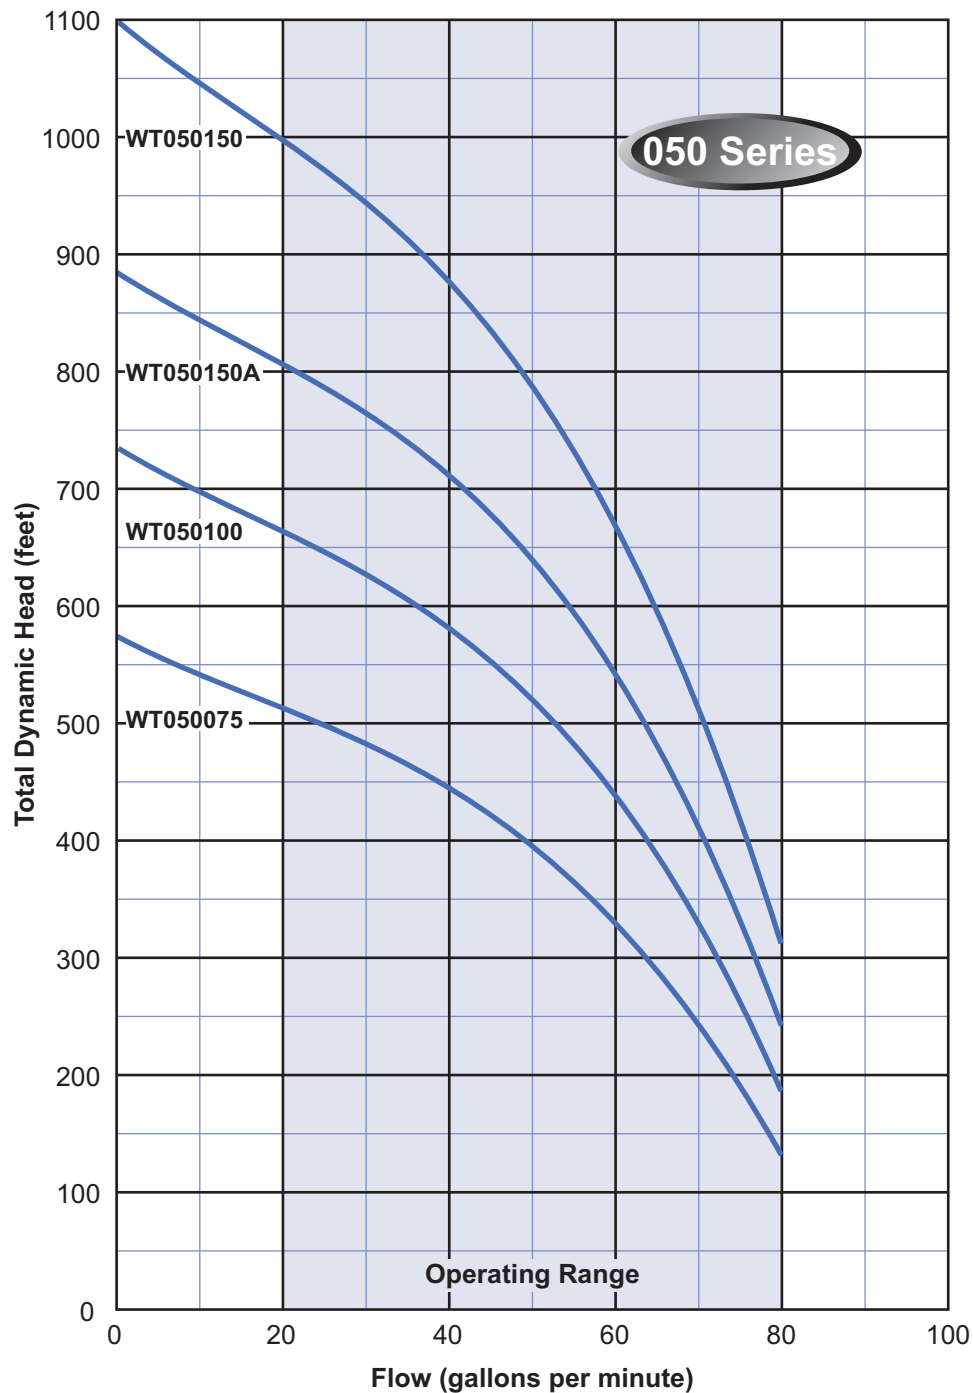

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



4" WS SERIES SUBMERSIBLE

WS Series



Webtrol's 4" WS Series

All stainless steel line of 4" submersible pumps, designed for efficient, dependable performance, to ensure a long and trouble free life span.

The **WS** Series is made entirely of corrosion and abrasion resistant stainless steel.

An excellent choice for use on the most demanding residential, commercial and municipal jobs.

Heavy duty, built in check valve for maximum performance and longer life.

Motor mounting specification is in accordance with NEMA standards.


Specifications

- Flows from 10 to 75 GPM.
- Heads to 1,200 feet.
- HP range: 1/2 - 10 HP, 60Hz



4" WS SERIES SUBMERSIBLE

Construction And Design Features


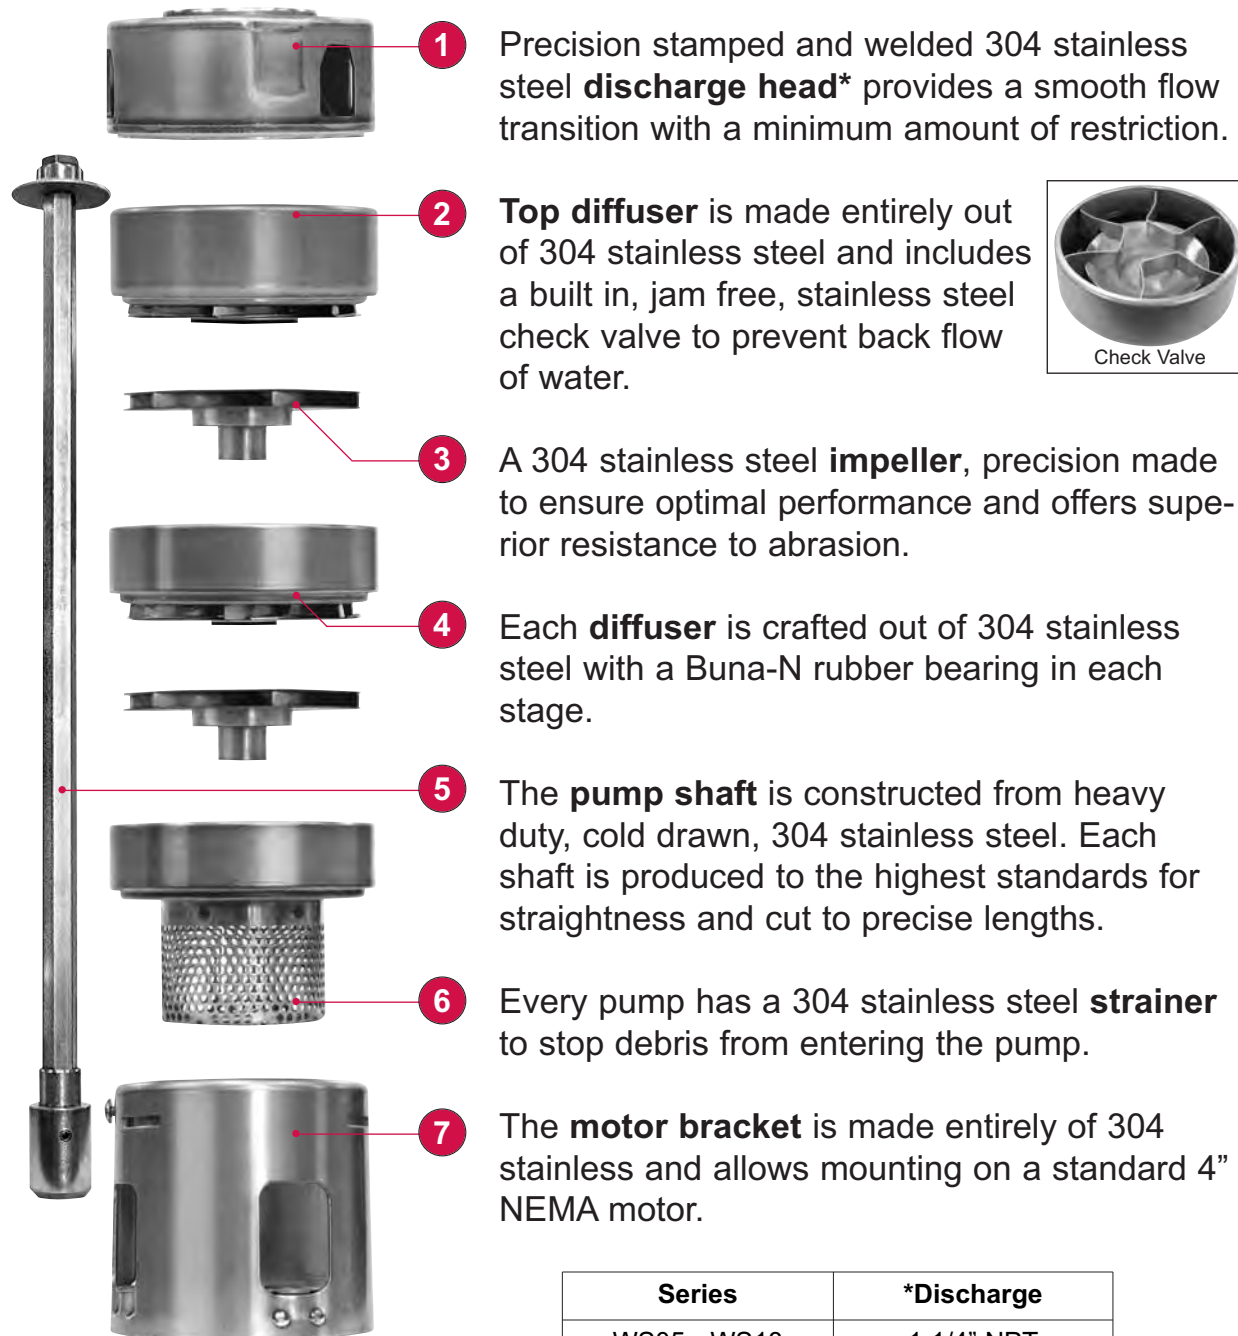


Series	*Discharge
WS05 - WS18	1 1/4" NPT
WS25	1 1/2" NPT
WS40 - WS75	2" NPT



There when you need us most


4" WS SERIES SUBMERSIBLE FAMILY CURVES

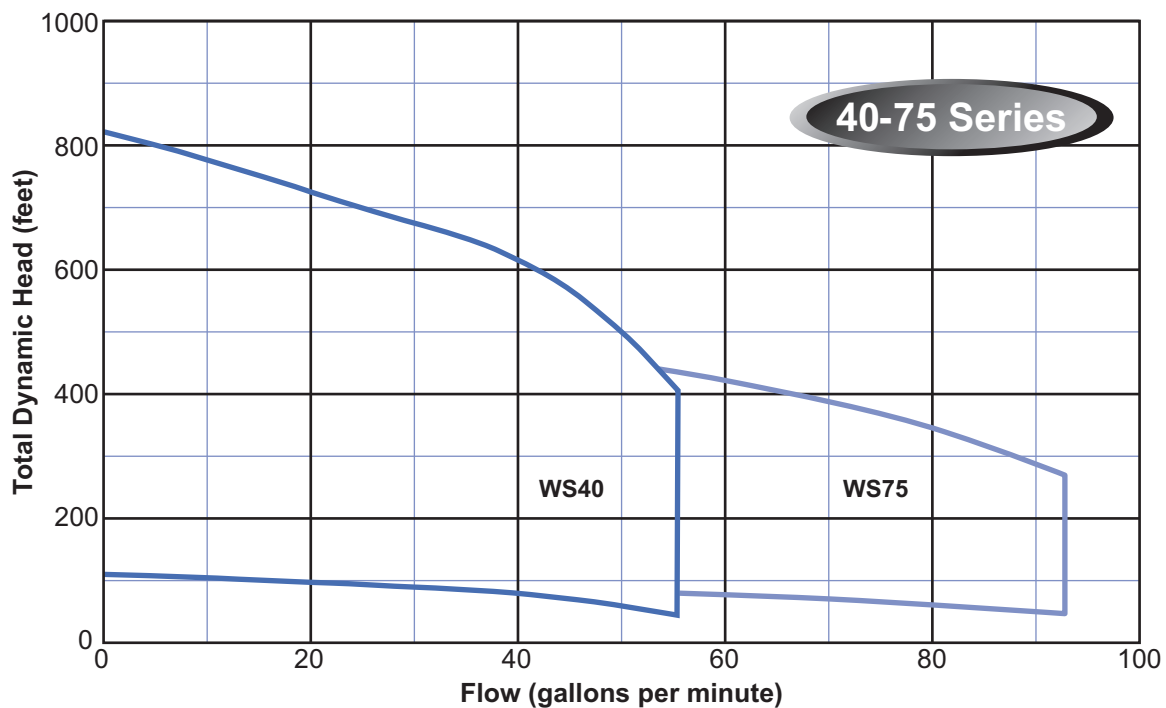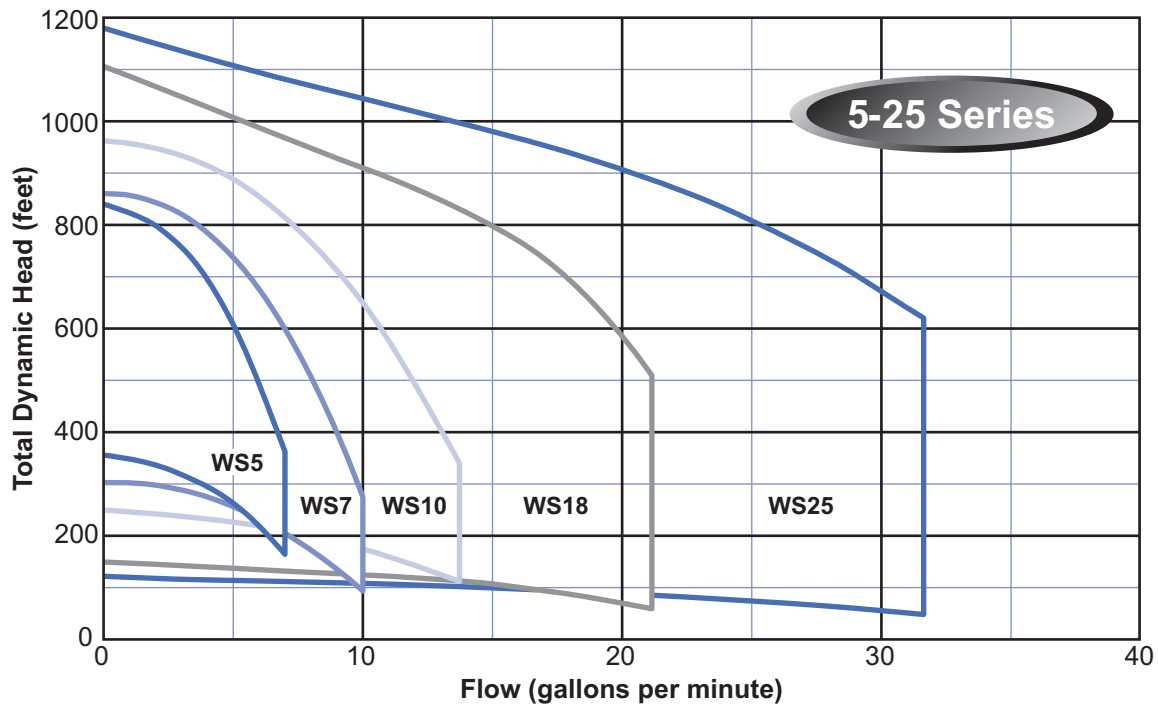



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

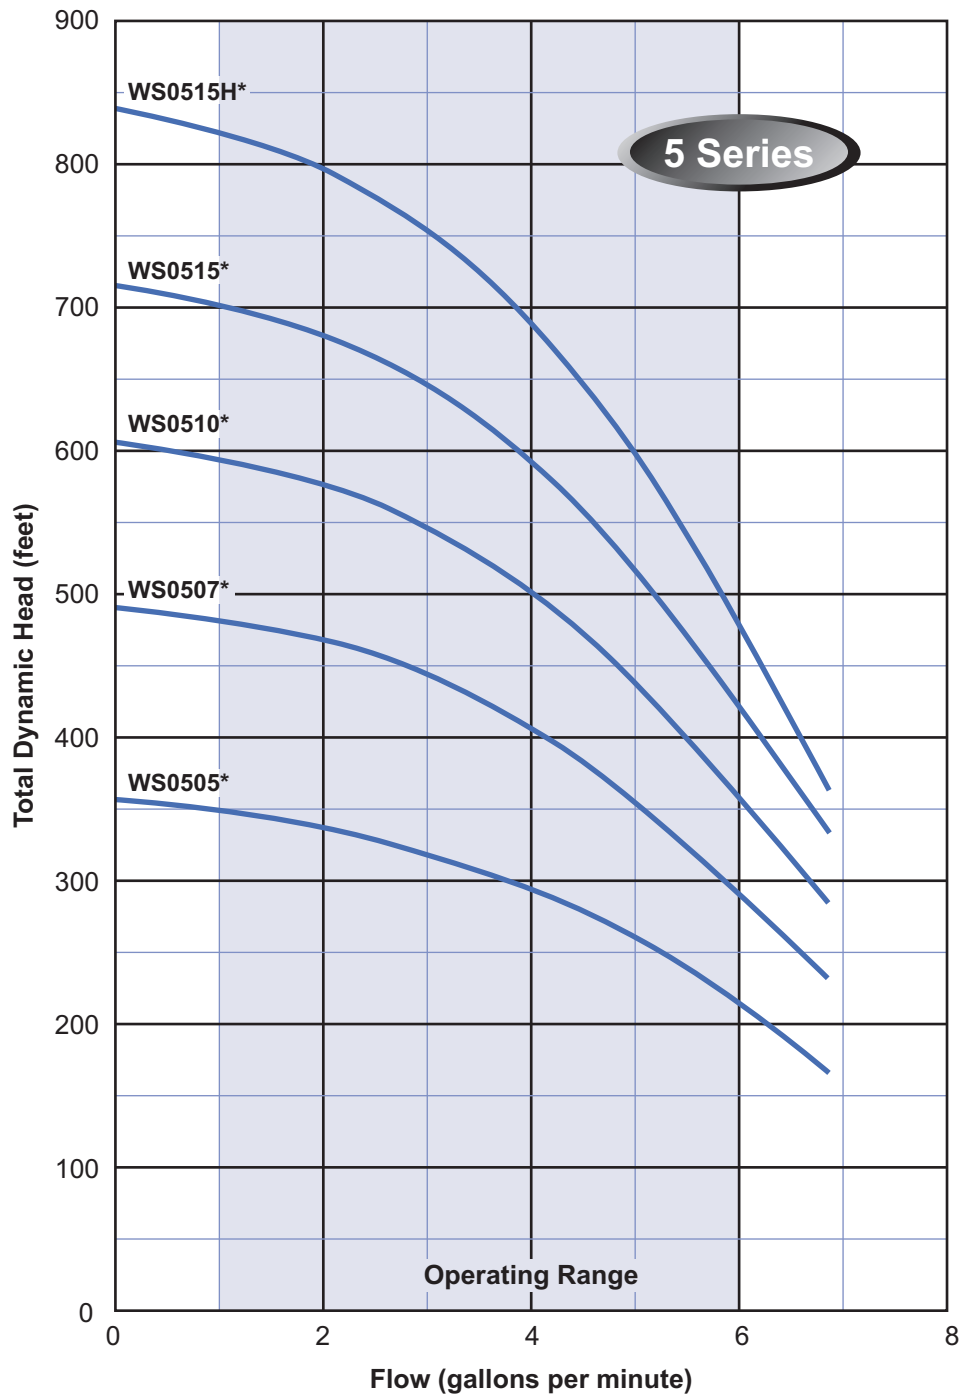

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

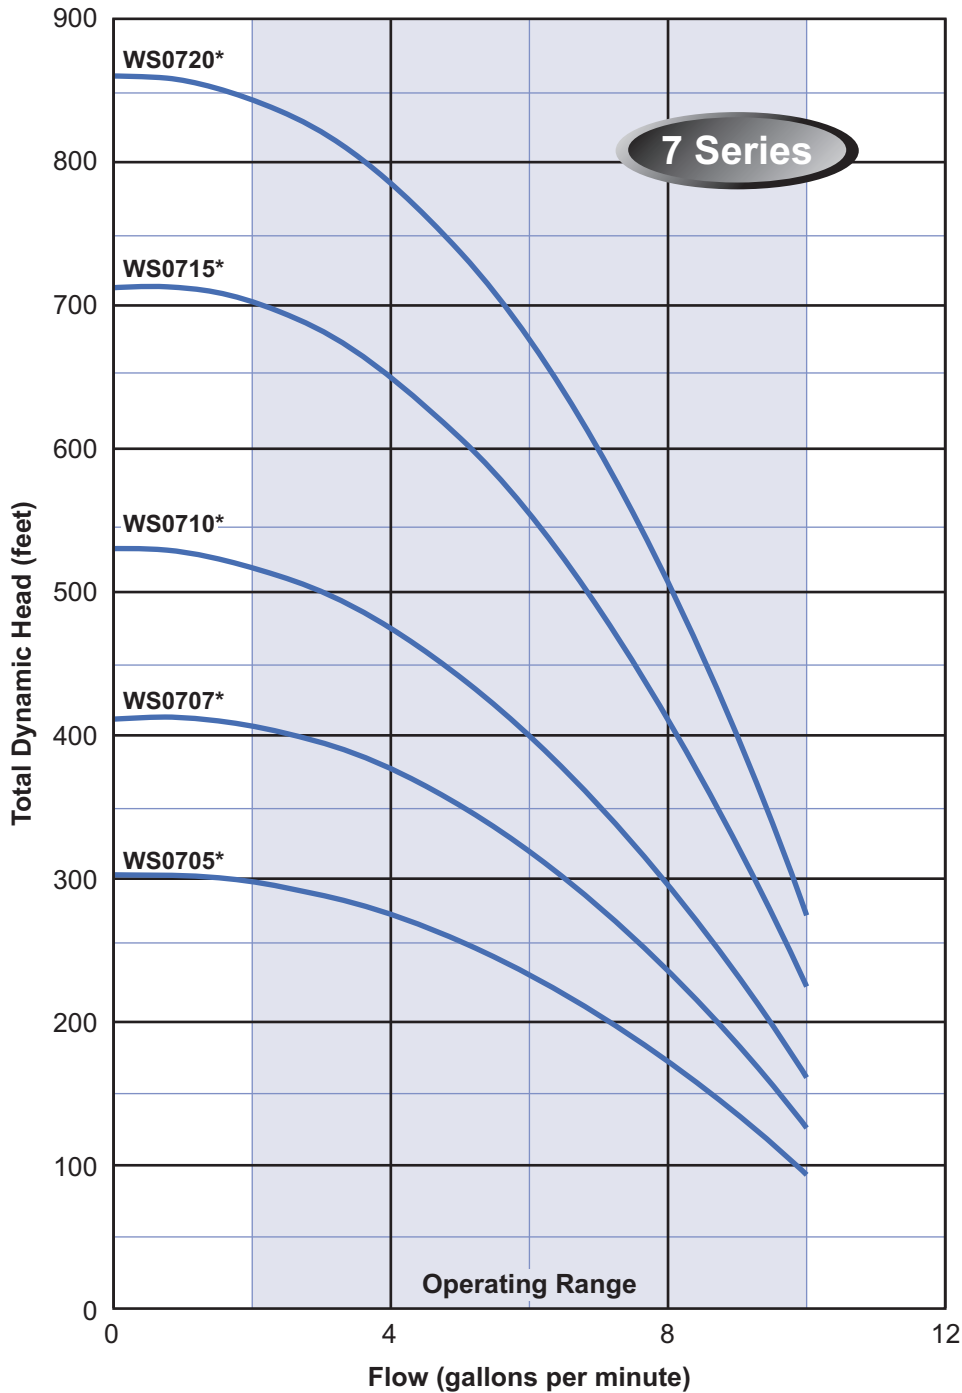

MODEL NO.: WS07202C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 30 ÷ 10 = 3.0 or 3HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

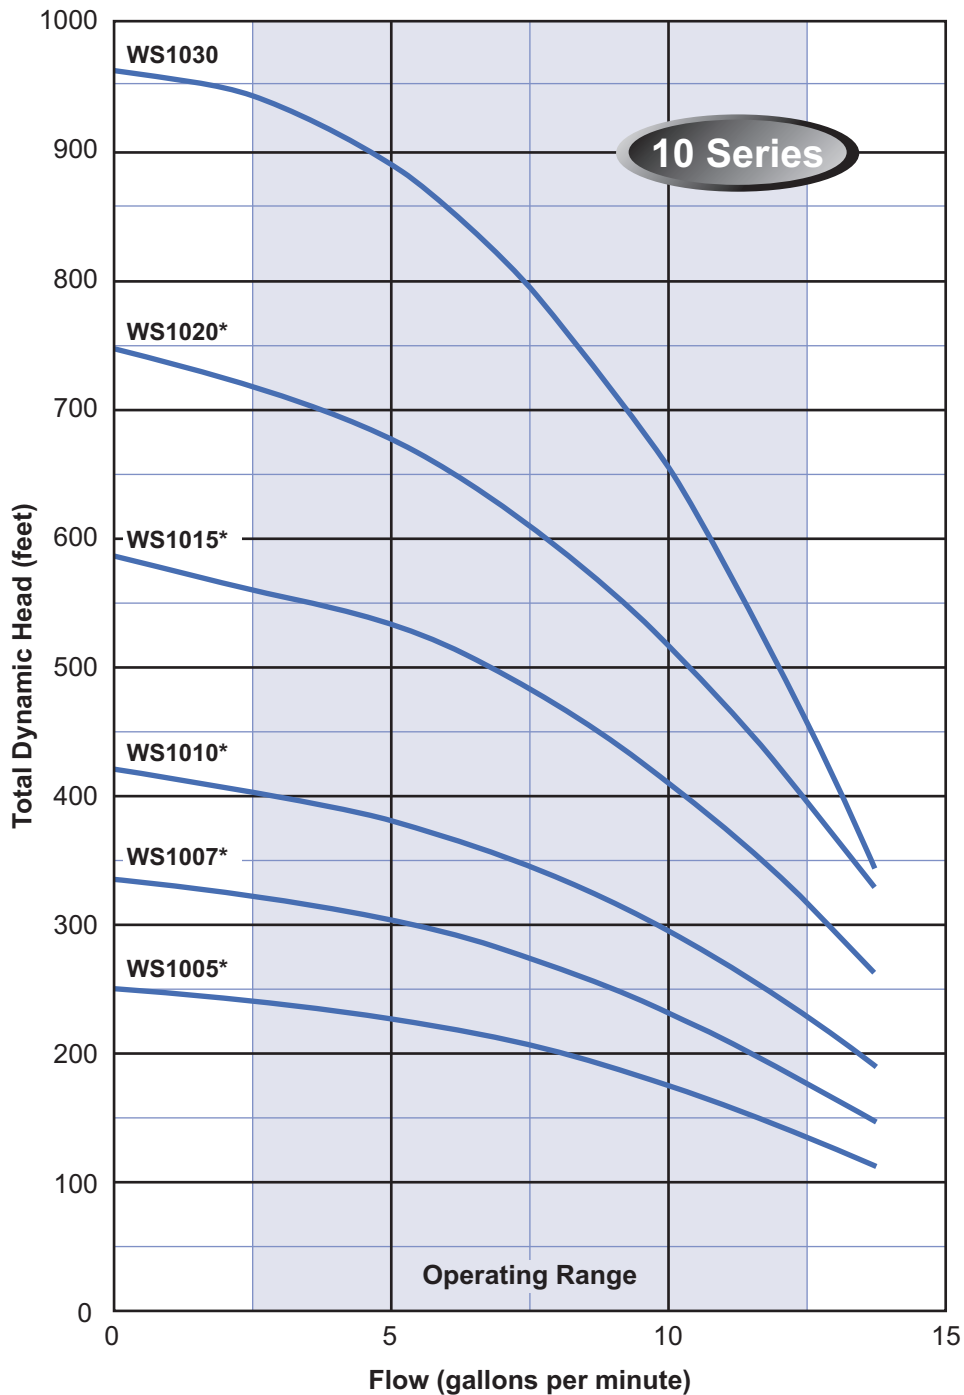


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

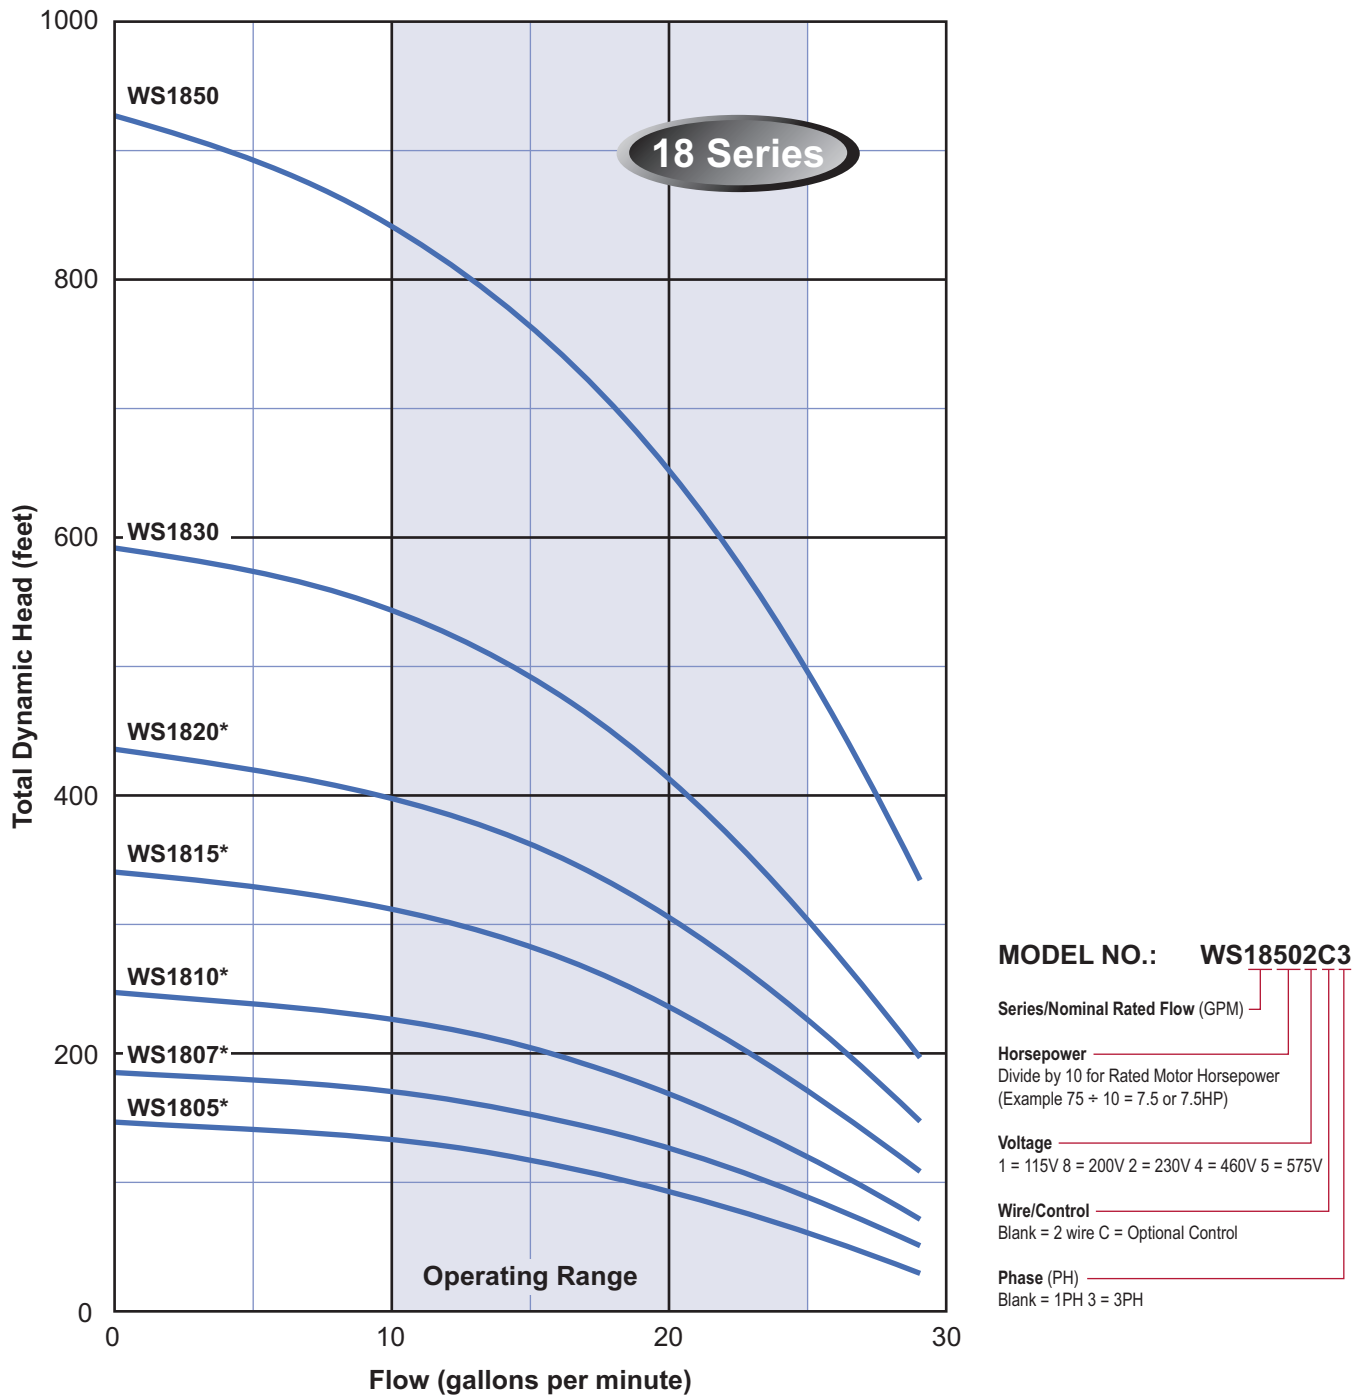

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

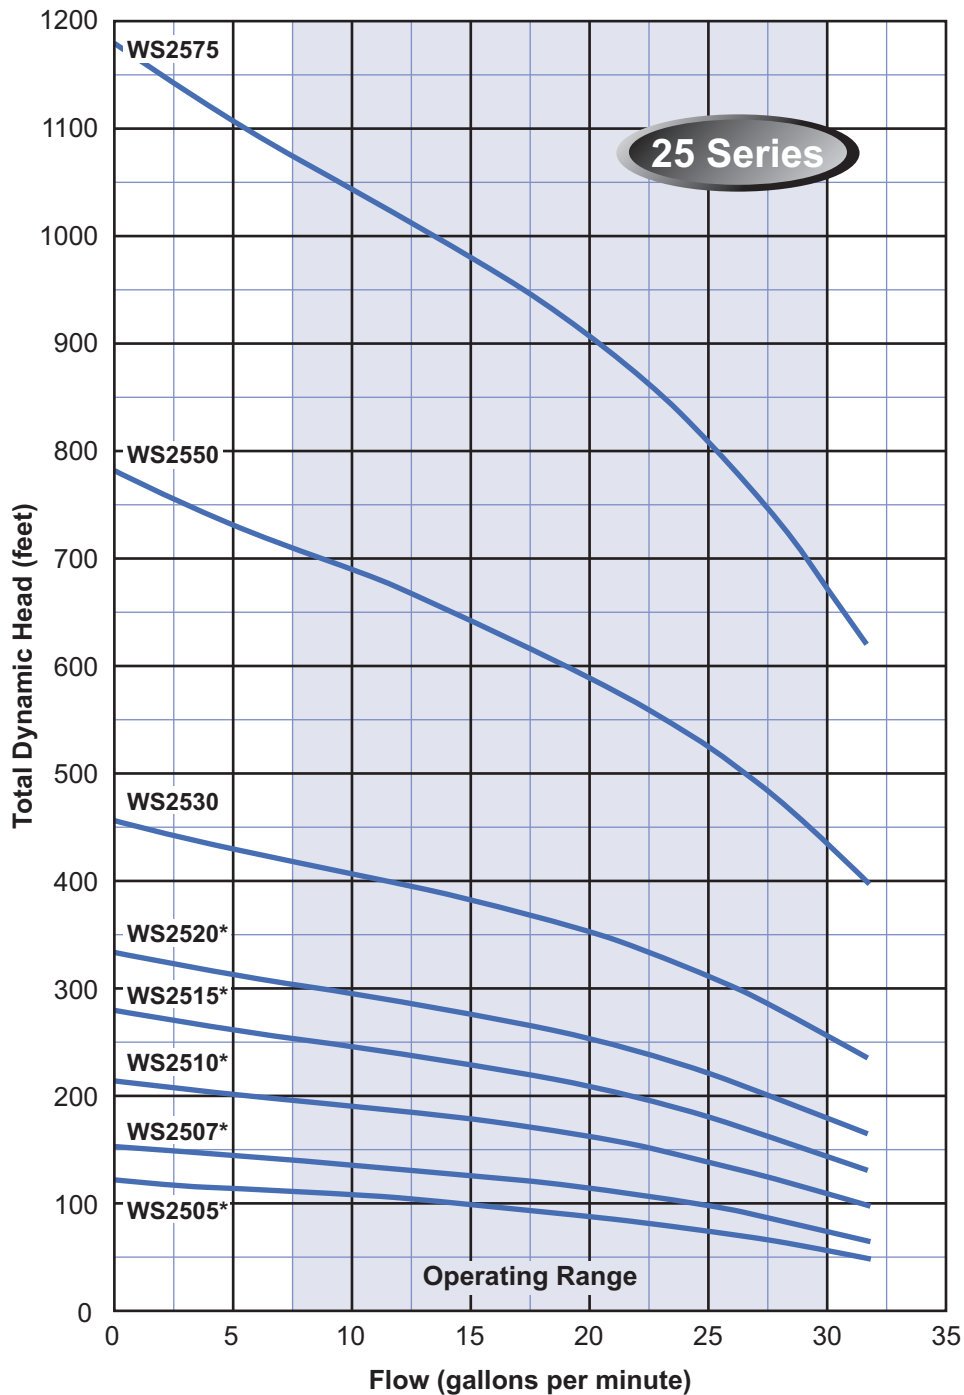

Note:

*Available with Franklin Electric MonoDrive constant pressure system.


These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

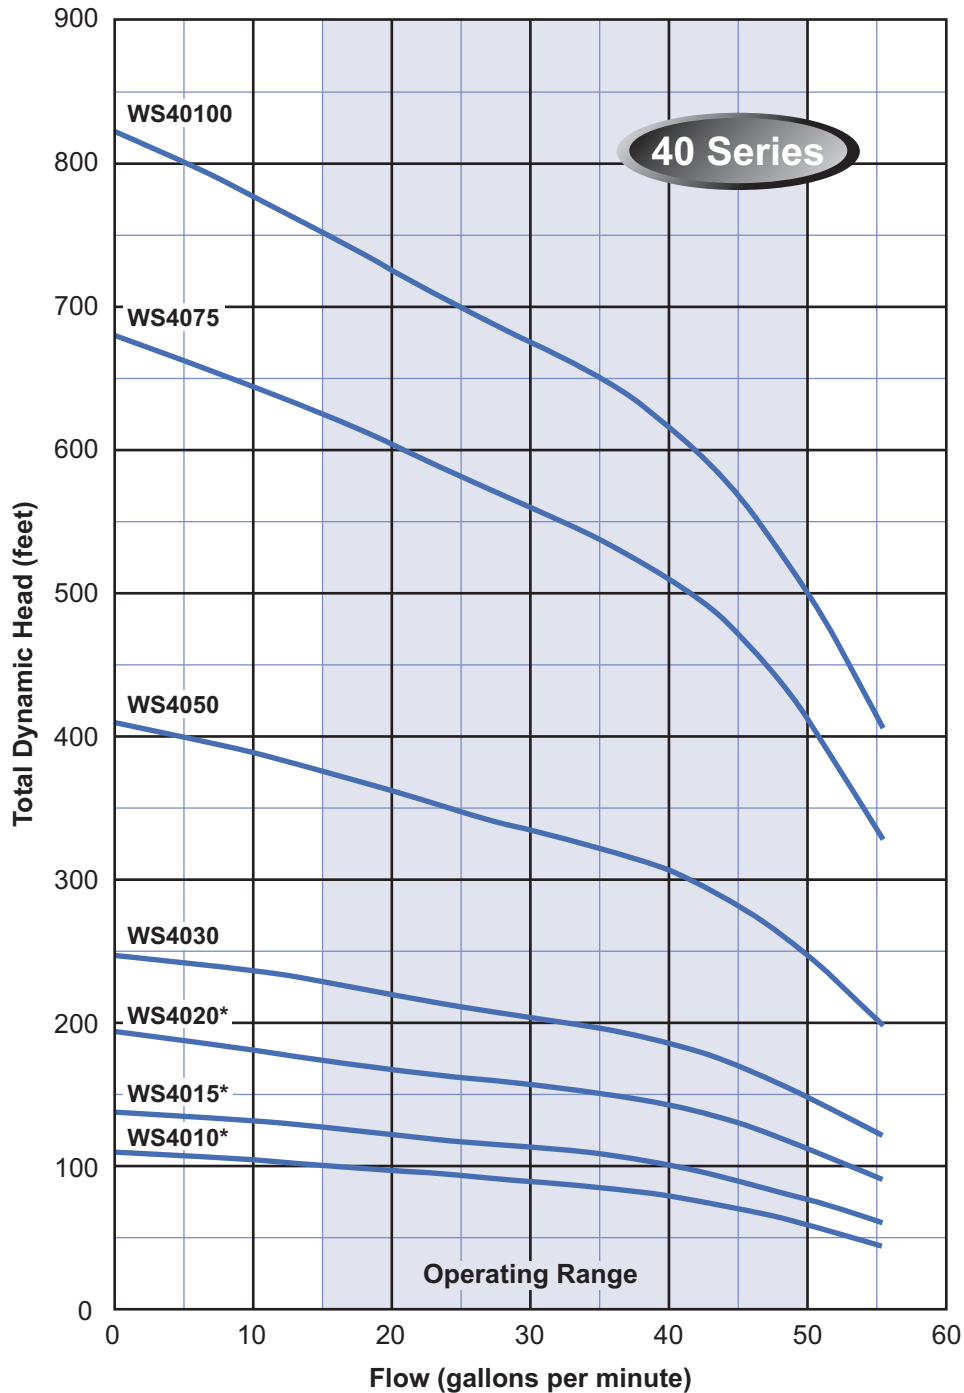

MODEL NO.: WS40752C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 75 ÷ 10 = 7.5 or 7.5HP)

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

*Available with Franklin Electric MonoDrive constant pressure system.
These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.
Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

4" WS SERIES SUBMERSIBLE CURVES

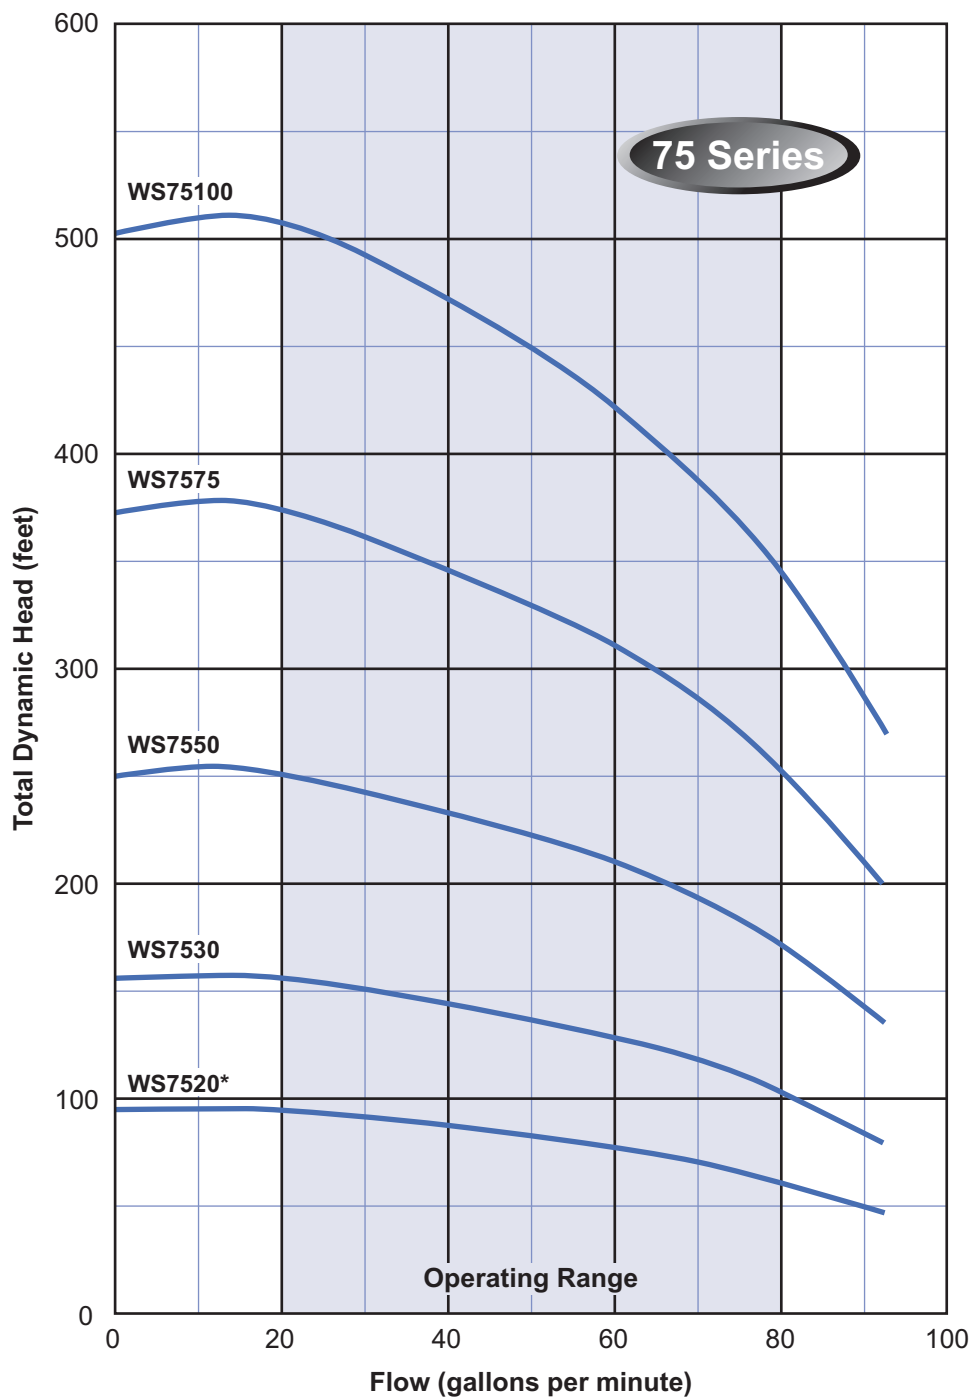

Note:

*Available with Franklin Electric MonoDrive constant pressure system.

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F.

Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE TURBINE



WS Series

Webtrol's 6" WS Series Turbine

All stainless steel line of 6" submersible pumps, designed for efficient, dependable performance, to ensure a long and trouble free life span.

The **WS** Series is made entirely of corrosion and abrasion resistant stainless steel.

An excellent choice for use on the most demanding residential, commercial and municipal jobs.

Heavy duty, built in check valve for maximum performance and longer life.

Motor mounting specification is in accordance with NEMA standards.

Specifications

- Flows to 400 GPM.
- Heads to 1,780 feet.
- HP range: 1 1/2 - 60 HP, 60Hz



Powered By

Franklin Electric



There when you need us most

6" WS SERIES SUBMERSIBLE TURBINE

Construction And Design Features



Precision stamped and welded 304 stainless steel **dis-charge head*** provides a smooth flow transition with a minimum amount of restriction. Includes a built in, jam free, stainless steel check valve to prevent back flow of water.

A 304 stainless steel **impeller**, precision made to ensure optimal performance and offers superior resistance to abrasion.

Each **diffuser** bowl is crafted out of 304 stainless steel with a Buna-N rubber bearing in each stage.

The **pump shaft** is constructed from heavy duty, cold drawn, 431 stainless steel. Each shaft is produced to the highest standards for straightness and cut to precise lengths.

Every pump has a 304 stainless steel **strainer** to stop debris from entering the pump.

The **motor bracket** is cast from 304 stainless steel and allows mounting on a standard NEMA motor.


Series	*Discharge	O.D. (One Motor Lead)
WS090	3" NPT	5.59" - 6" Mtr.
WS150	3" NPT	5.59" - 6" Mtr.
WS230	4" NPT	5.87" - 6" Mtr.
WS300	4" NPT	5.87" - 6" Mtr.

See price pages for lengths and weights.



There when you need us most


6" WS SERIES SUBMERSIBLE TURBINE FAMILY CURVES

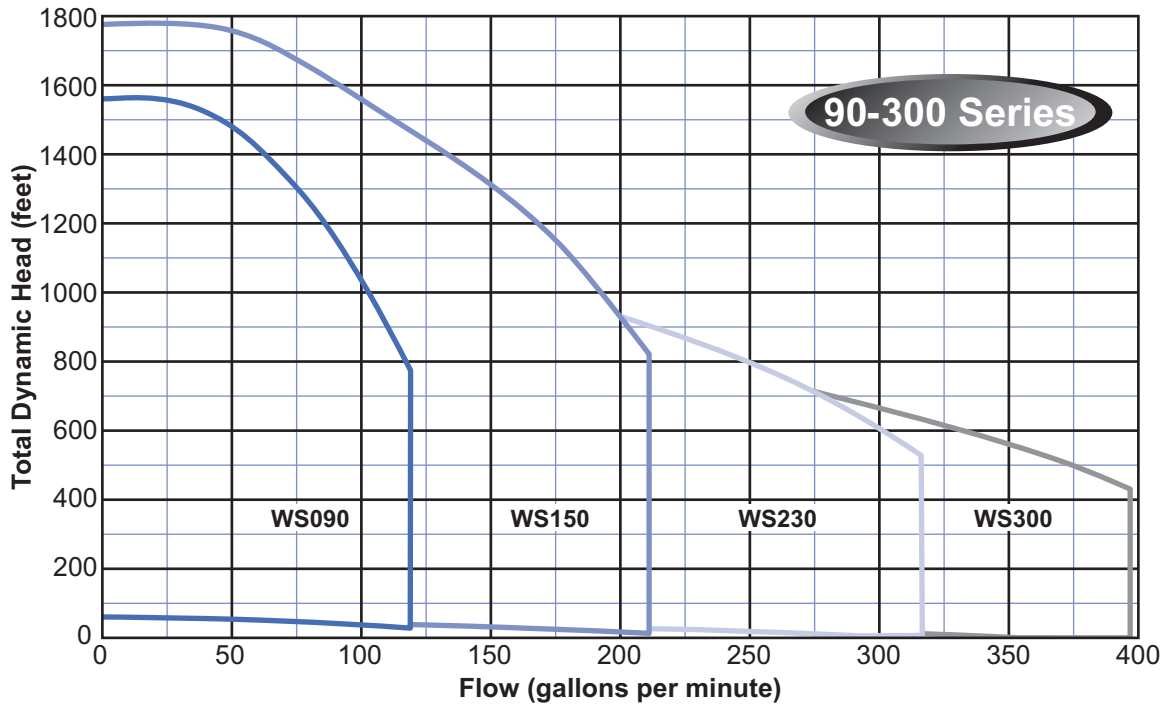



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

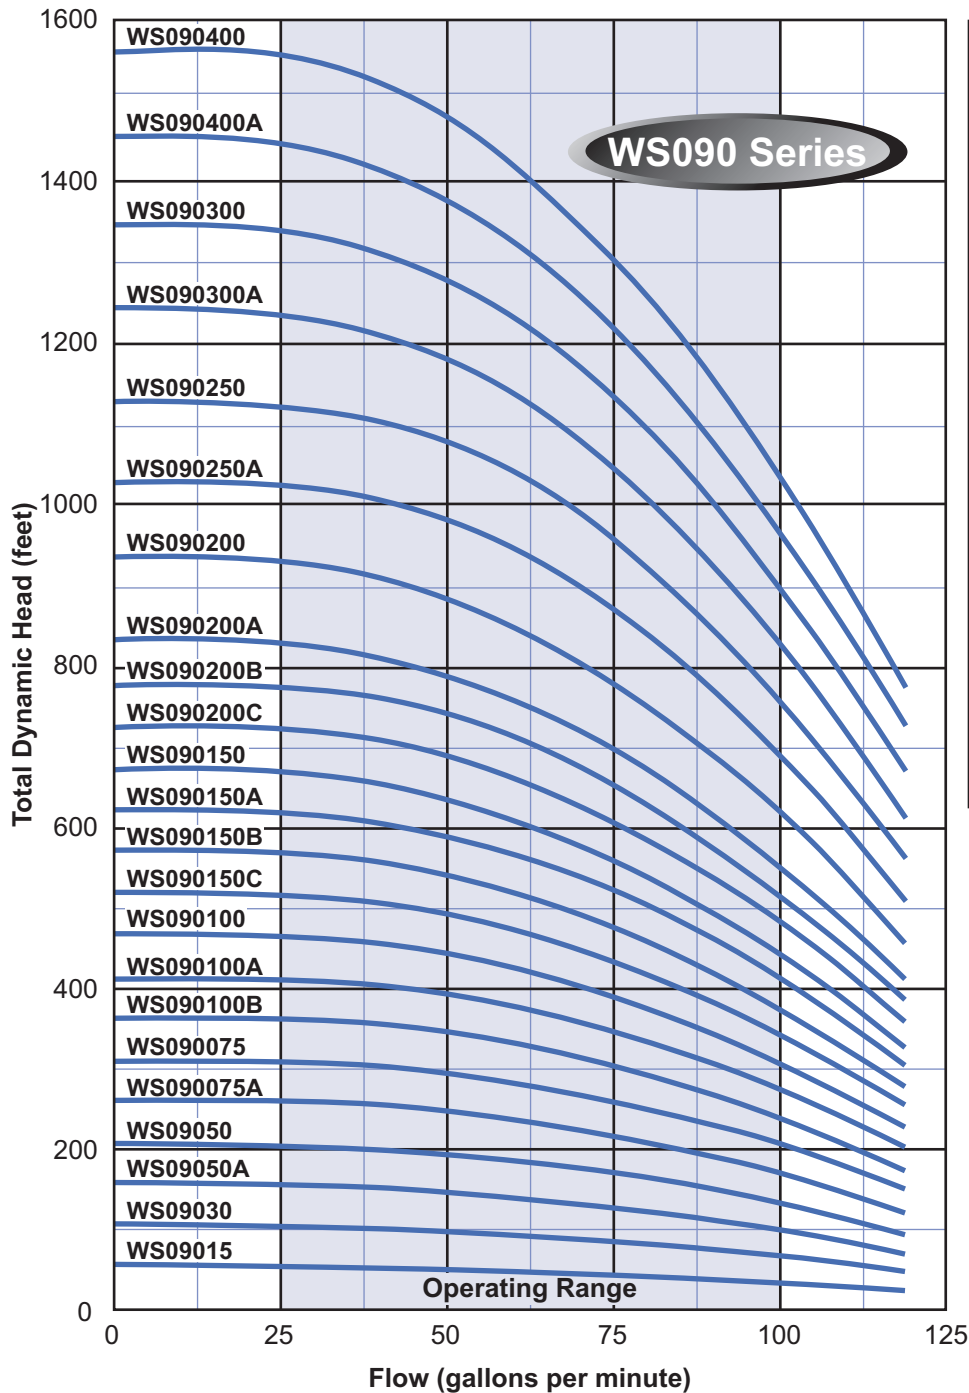

MODEL NO.	HP	STAGES
WS09015	1.5	1
WS09030	3.0	2
WS09050A	5.0	3
WS09050	5.0	4
WS090075A	7.5	5
WS090075	7.5	6
WS090100B	10.0	7
WS090100A	10.0	8
WS090100	10.0	9
WS090150C	15.0	10
WS090150B	15.0	11
WS090150A	15.0	12
WS090150	15.0	13
WS090200C	20.0	14
WS090200B	20.0	15
WS090200A	20.0	16
WS090200	20.0	18
WS090250A	25.0	20
WS090250	25.0	22
WS090300A	30.0	24
WS090300	30.0	26
WS090400A	40.0	28
WS090400	40.0	30

MODEL NO.: WS090200B2C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

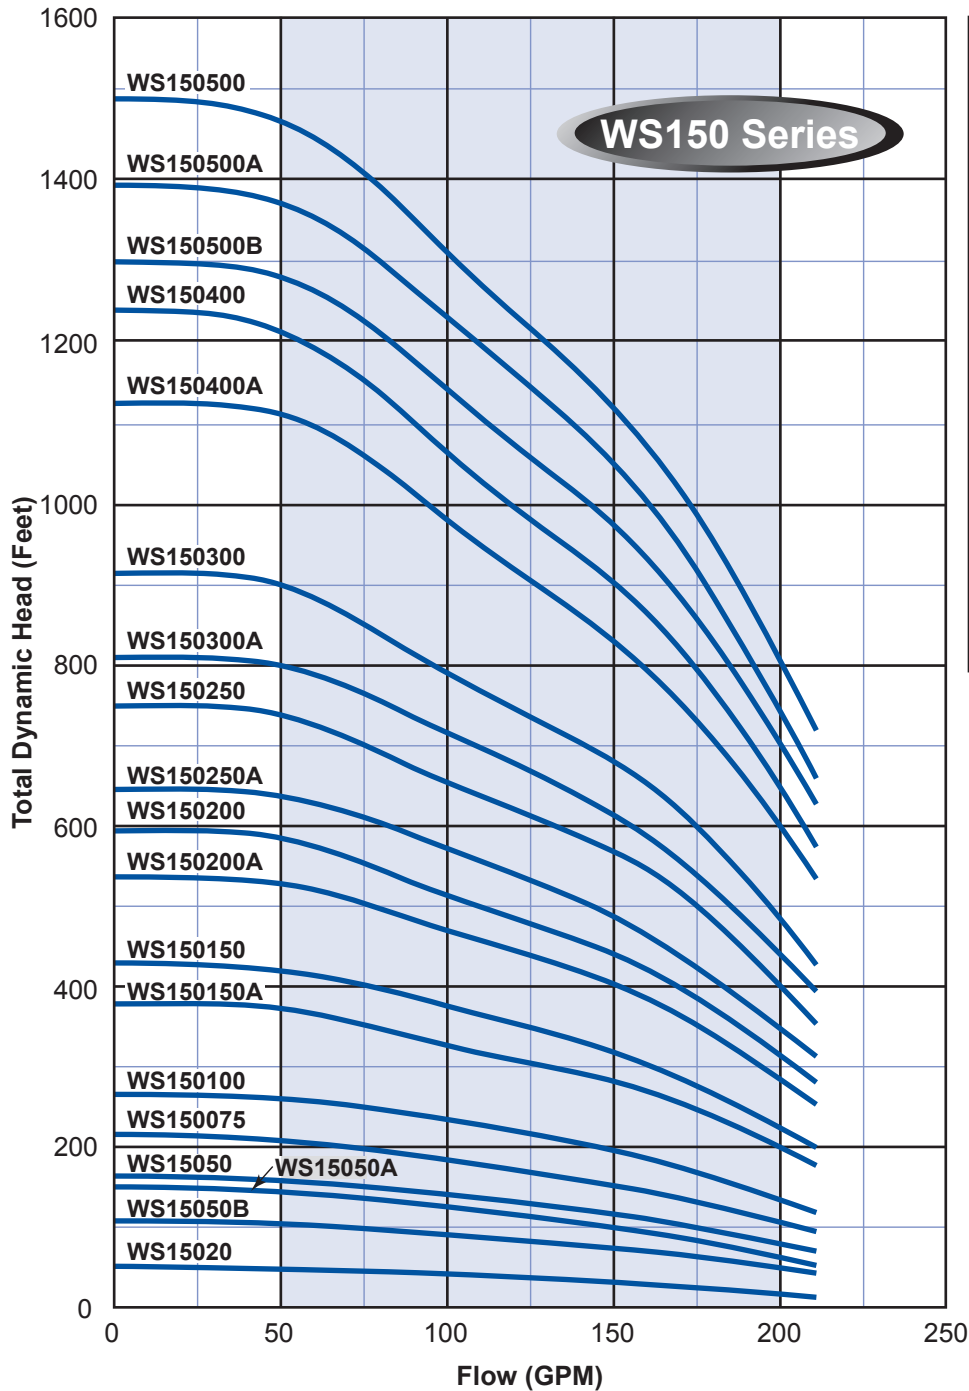

MODEL NO.	HP	STAGES
WS15020	2.0	1
WS15050B	5.0	2
WS15050A	5.0	3A
WS15050	5.0	3
WS150075	7.5	4
WS150100	10.0	5
WS150150A	15.0	7
WS150150	15.0	8
WS150200A	20.0	10
WS150200	20.0	11
WS150250A	25.0	12
WS150250	25.0	14
WS150300A	30.0	15
WS150300	30.0	17
WS150400A	40.0	21
WS150400	40.0	23
WS150500B	50.0	24
WS150500A	50.0	26
WS150500	50.0	28

MODEL NO.: WS150200A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

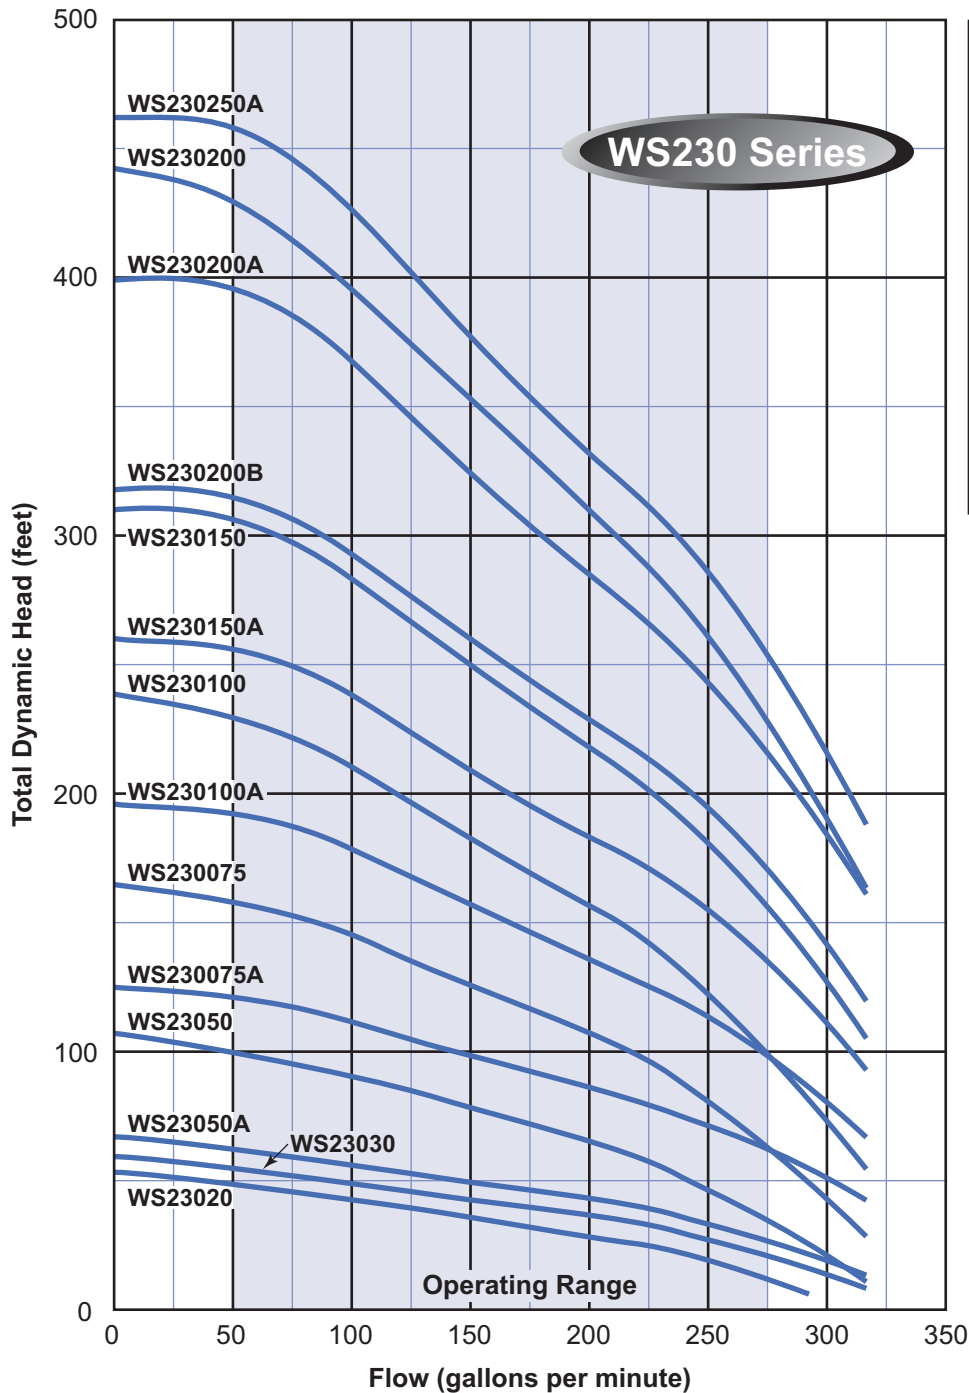

MODEL NO.	HP	STAGES
WS23020	2.0	1B
WS23030	3.0	1A
WS23050A	5.0	1
WS23050	5.0	2AB
WS230075A	7.5	2
WS230075	7.5	3BB
WS230100A	10.0	3
WS230100	10.0	4BC
WS230150A	15.0	4
WS230150	15.0	5C
WS230200B	20.0	5
WS230200A	20.0	6
WS230200	20.0	7C
WS230250A	25.0	7

MODEL NO.: WS230150A2C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

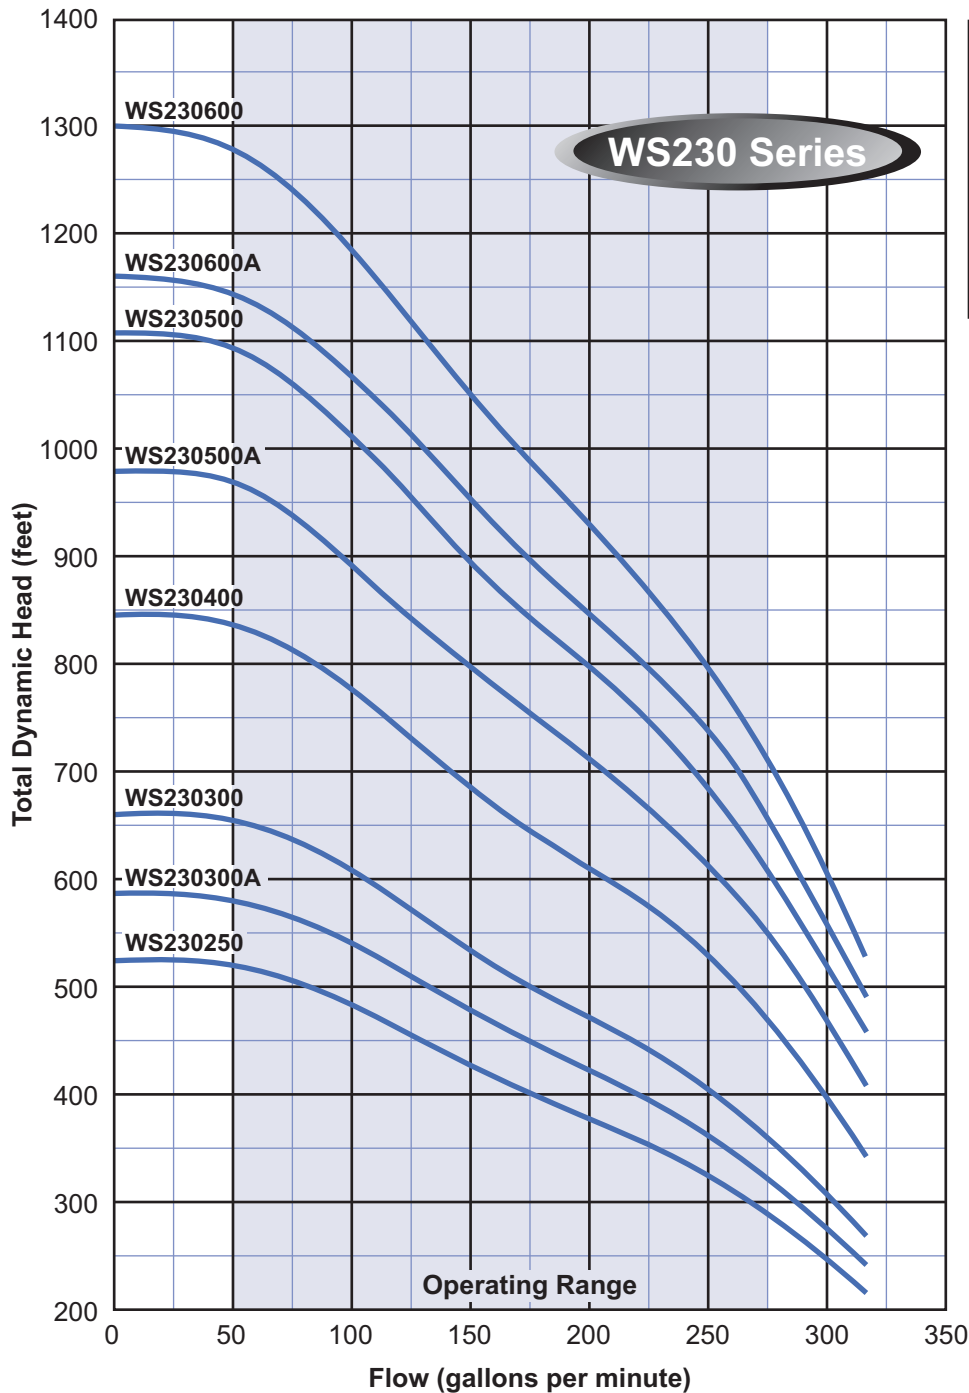

MODEL NO.	HP	STAGES
WS230250	25.0	8
WS230300A	30.0	9
WS230300	30.0	10
WS230400	40.0	13
WS230500A	50.0	15
WS230500	50.0	17
WS230600A	60.0	18
WS230600	60.0	20

MODEL NO.: WS230300A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

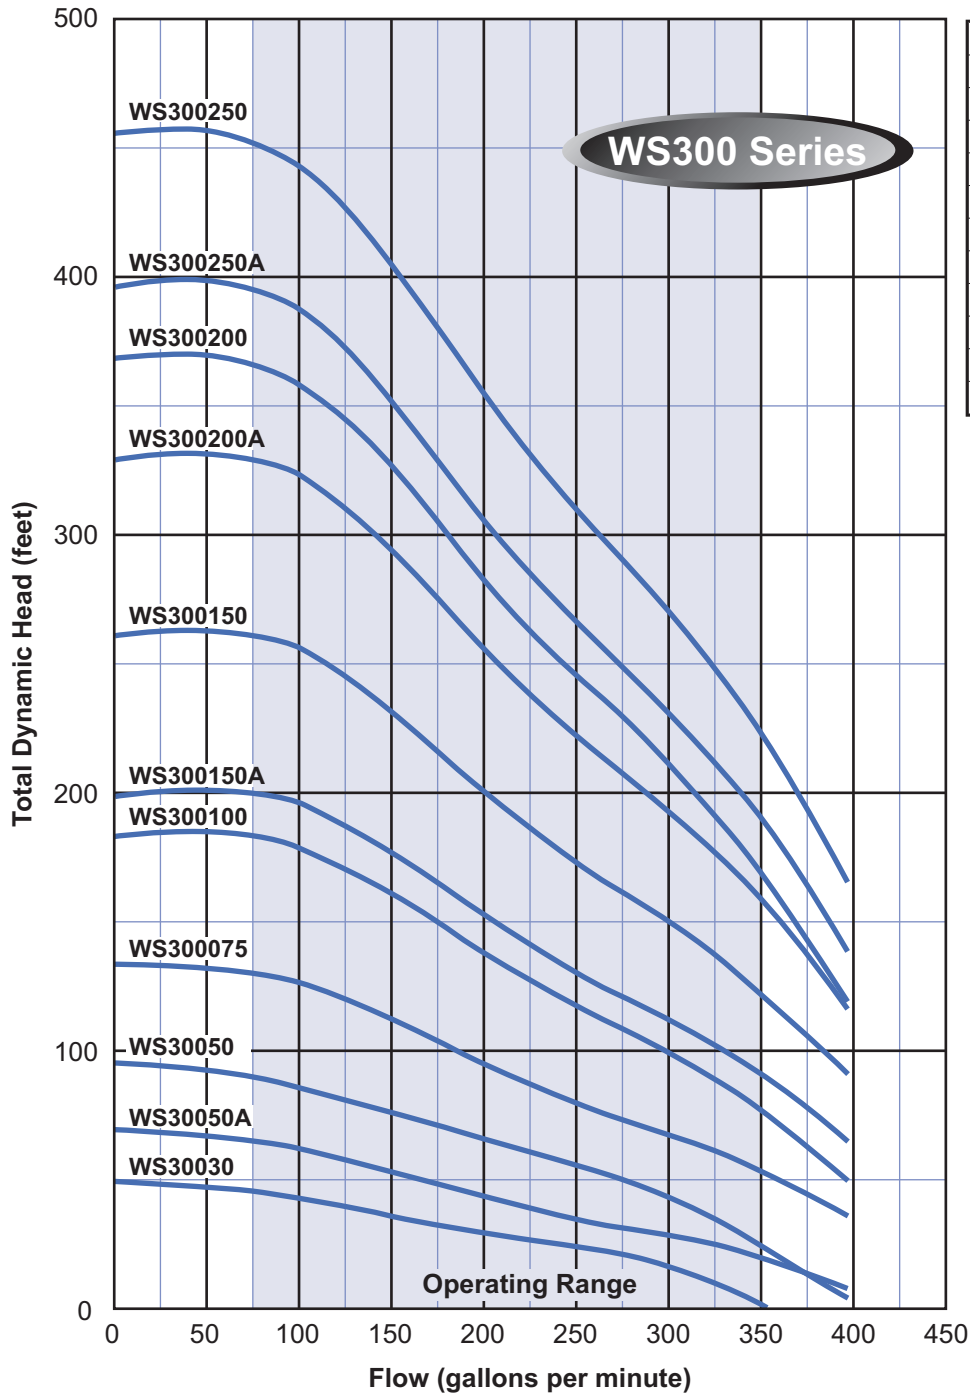

MODEL NO.	HP	STAGES
WS300030	3.0	1B
WS300050A	5.0	1
WS300050	5.0	2BB
WS300075	7.5	2
WS300100	10.0	3A
WS300150A	15.0	3
WS300150	15.0	4
WS300200A	20.0	5
WS300200	20.0	6B
WS300250A	25.0	6
WS300250	25.0	7

MODEL NO.: WS300150A2C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example $20 \div 10 = 2.0$ or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS SERIES SUBMERSIBLE CURVES

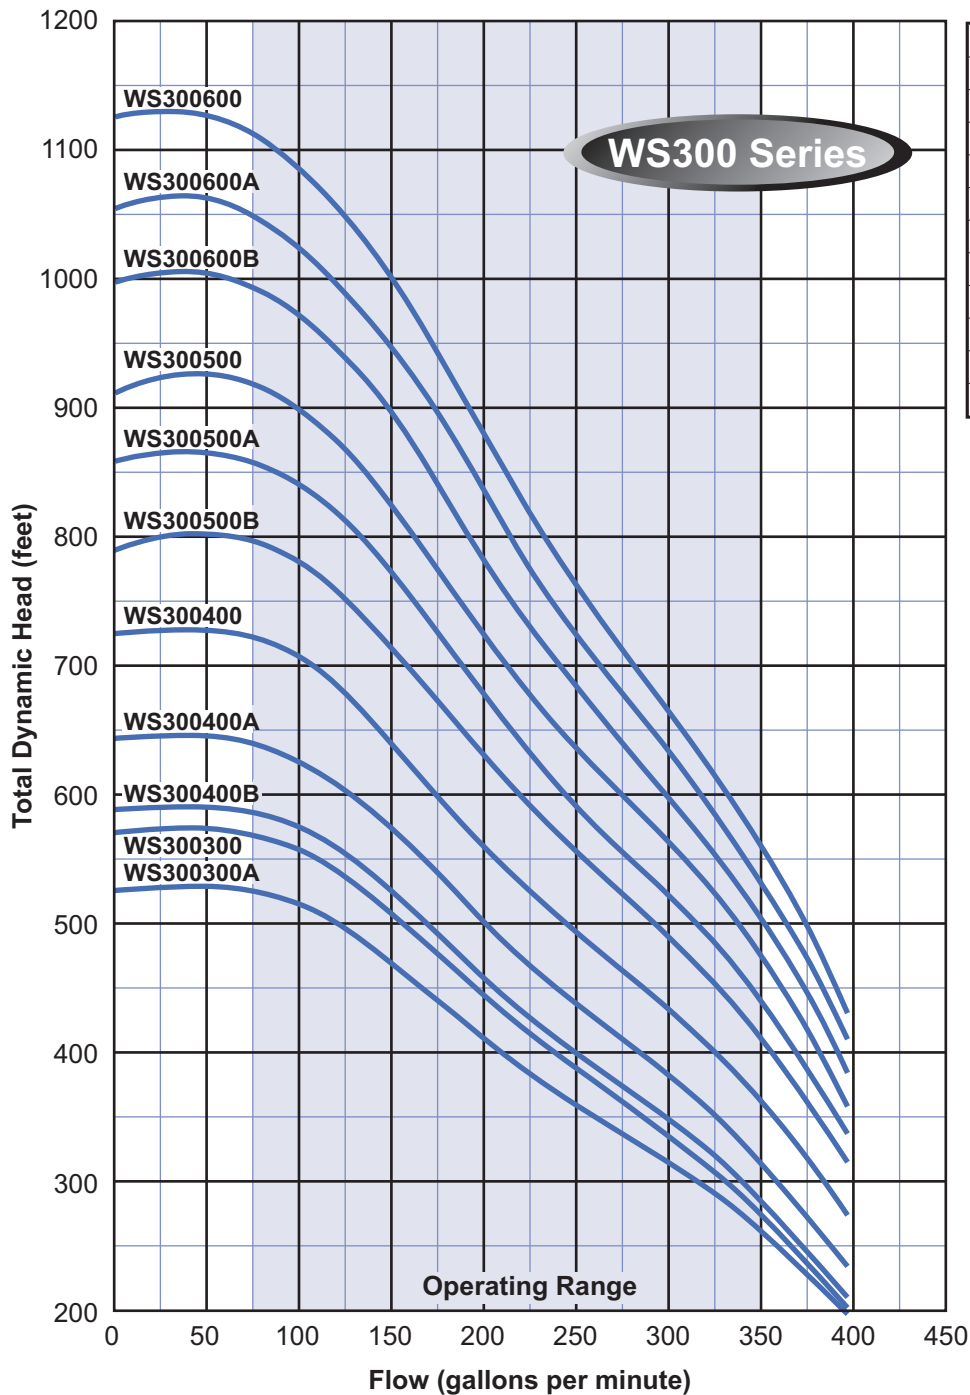

MODEL NO.	HP	STAGES
WS300300A	30.0	8
WS300300	30.0	9B
WS300400B	40.0	9
WS300400A	40.0	10
WS300400	40.0	11
WS300500B	50.0	12
WS300500A	50.0	13
WS300500	50.0	14
WS300600B	60.0	15
WS300600A	60.0	16
WS300600	60.0	17

MODEL NO.: WS300400B4C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS 90 SERIES HP / EFF CURVE

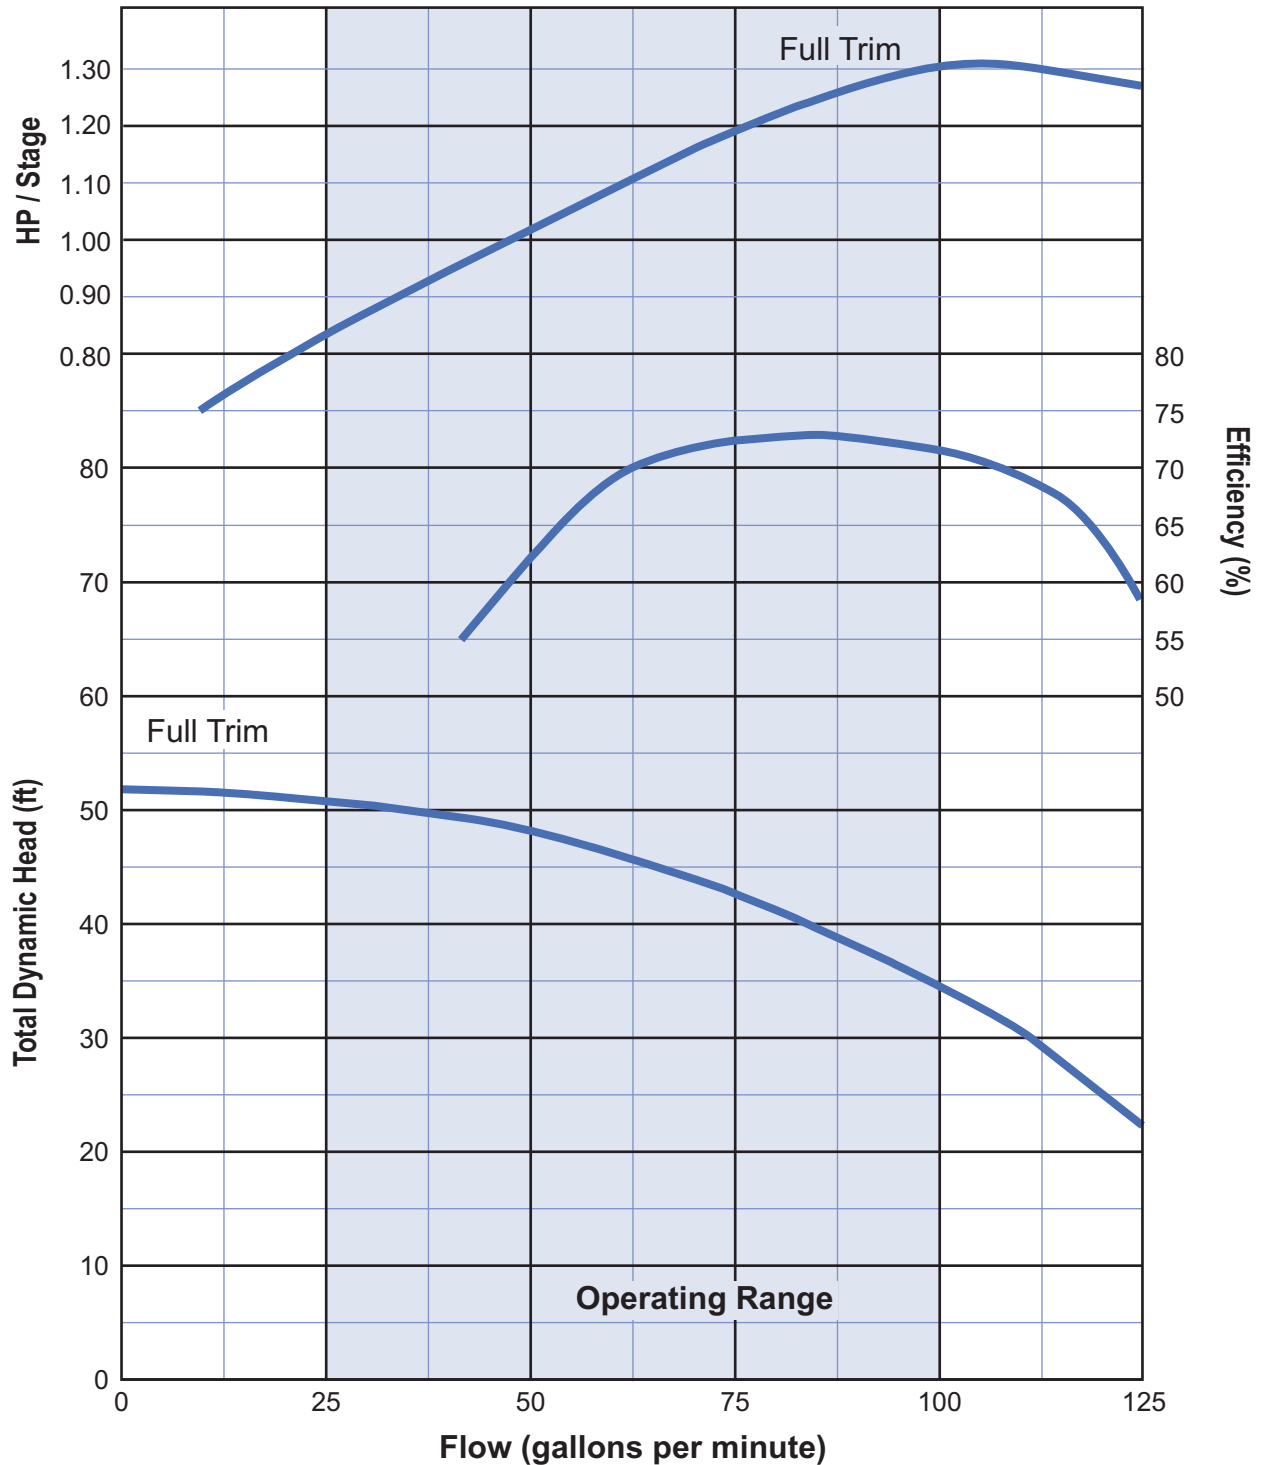


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS 150 SERIES HP / EFF CURVE

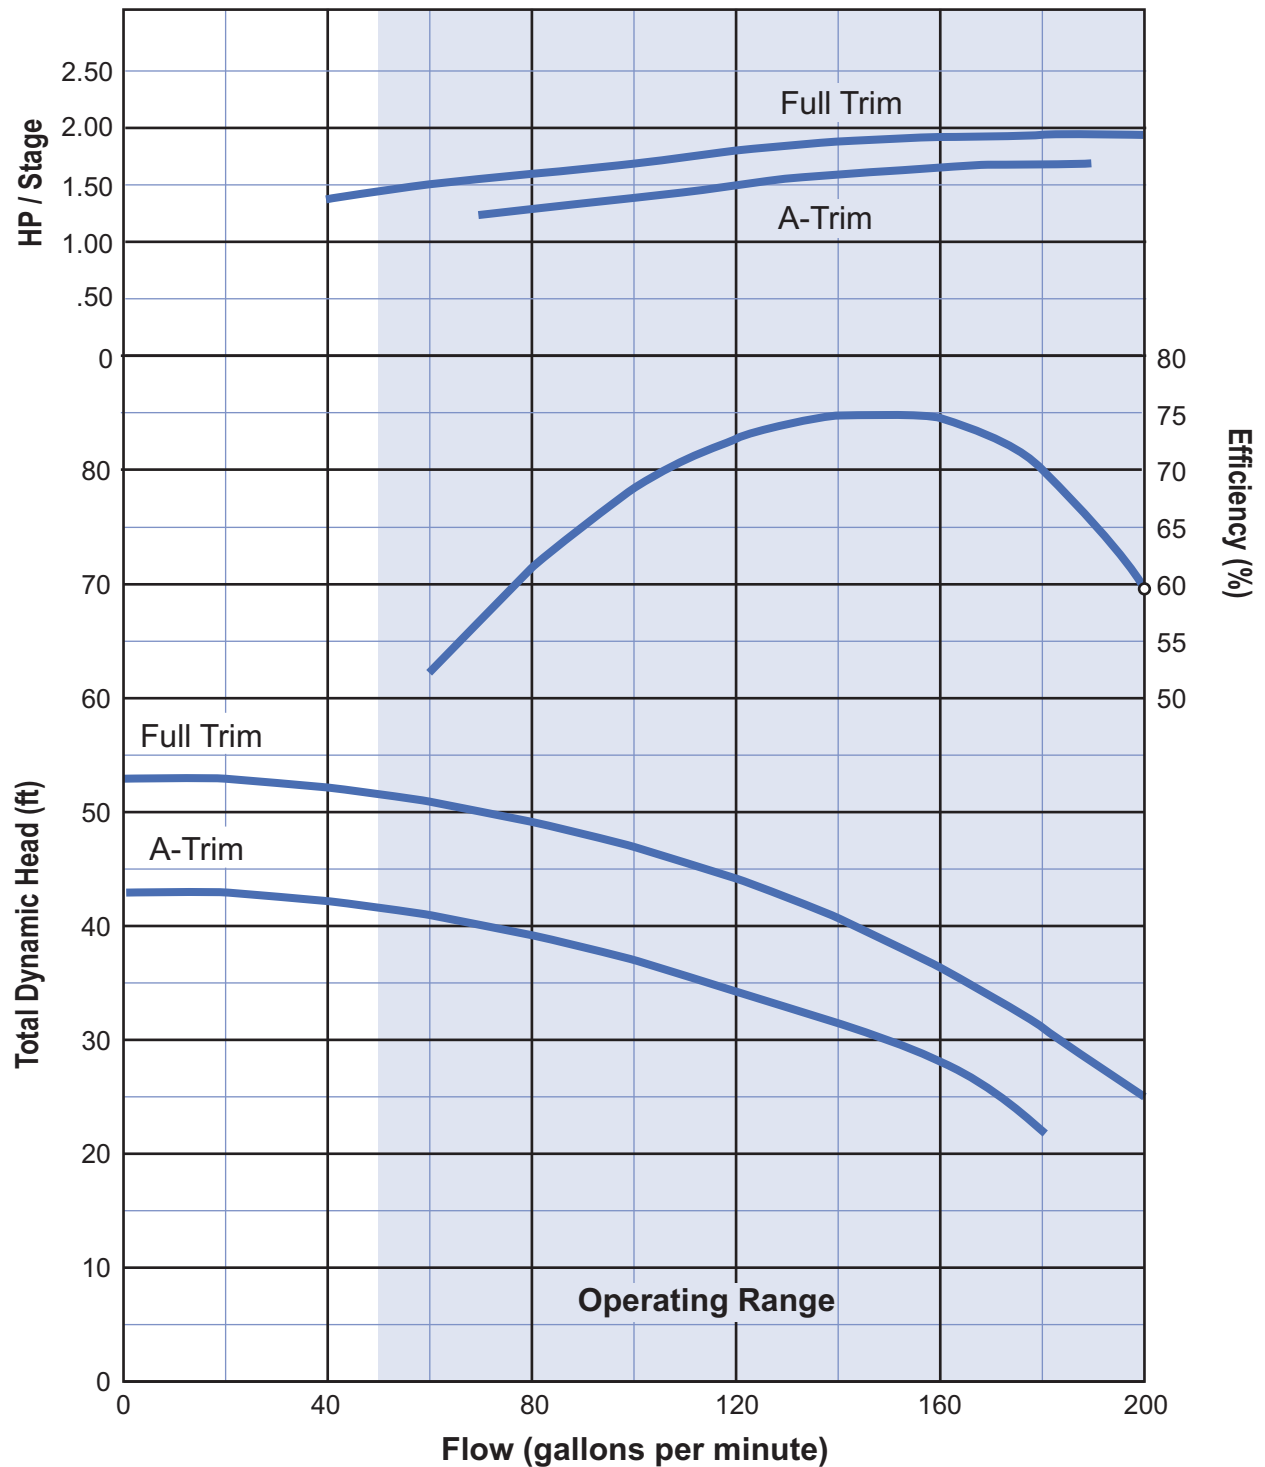


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

6" WS 230 SERIES HP / EFF CURVE

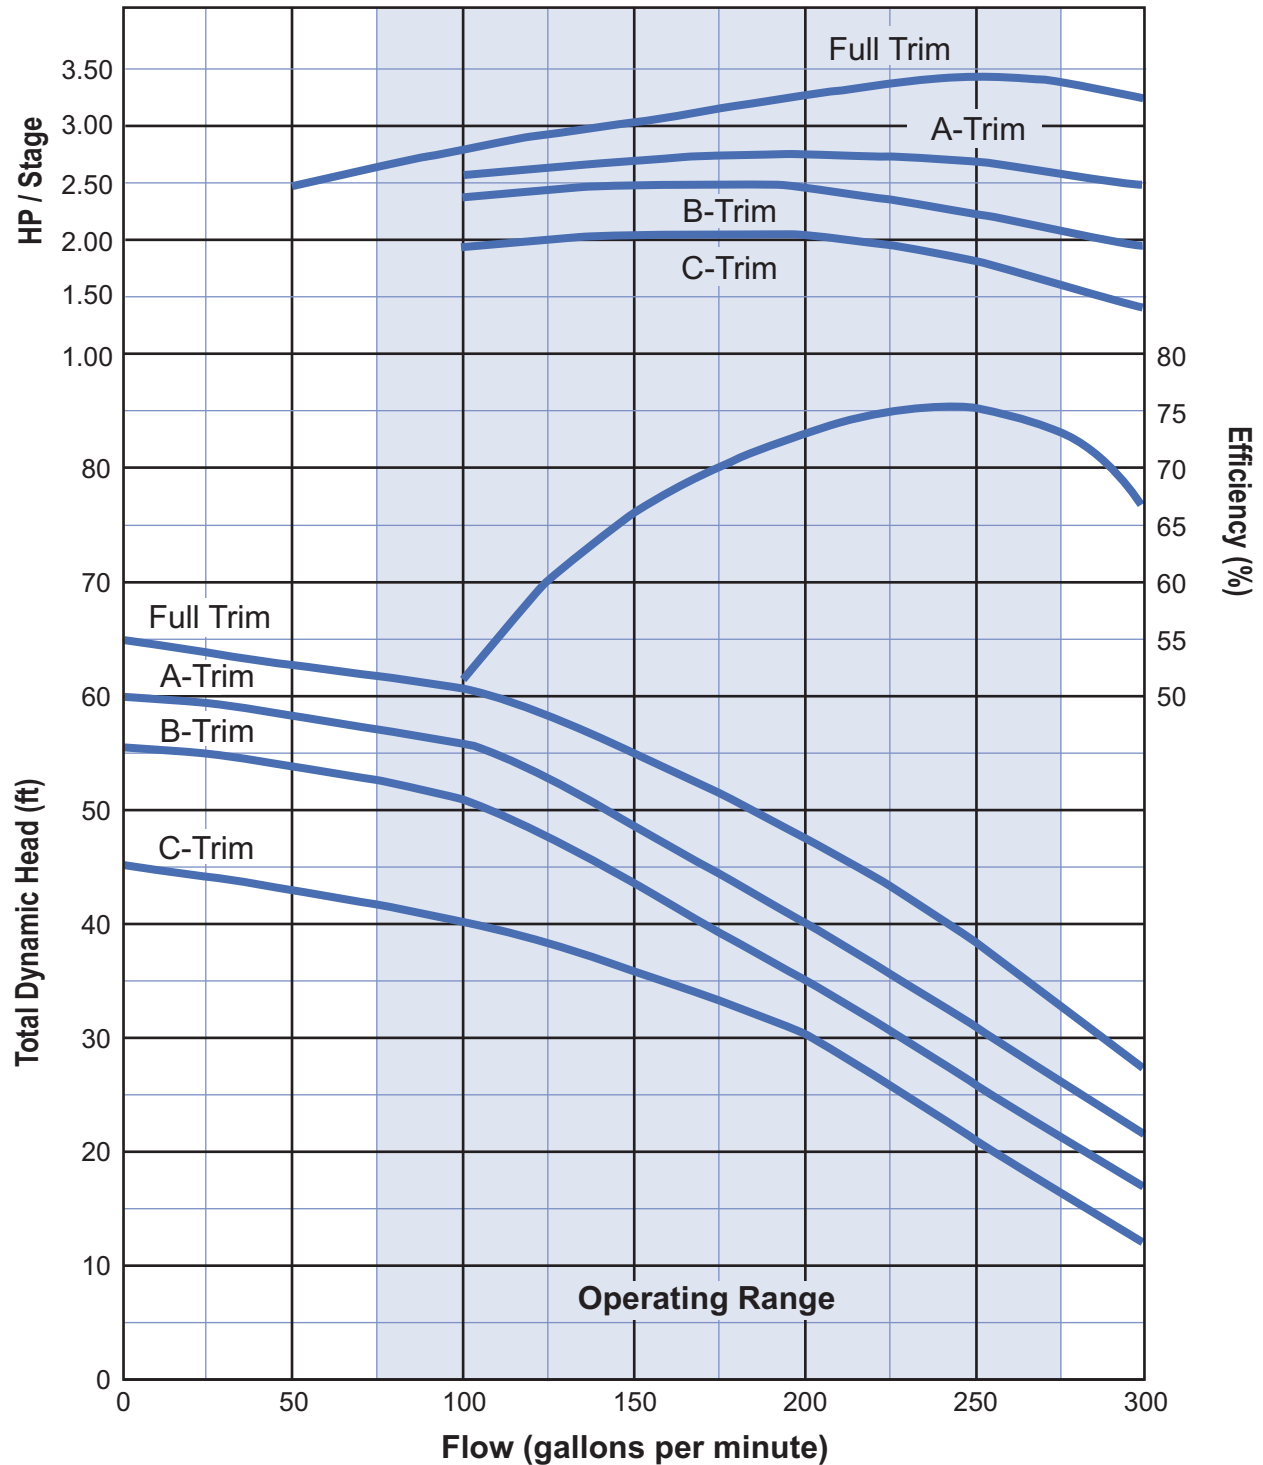


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.




There when you need us most

6" WS 300 SERIES HP / EFF CURVE

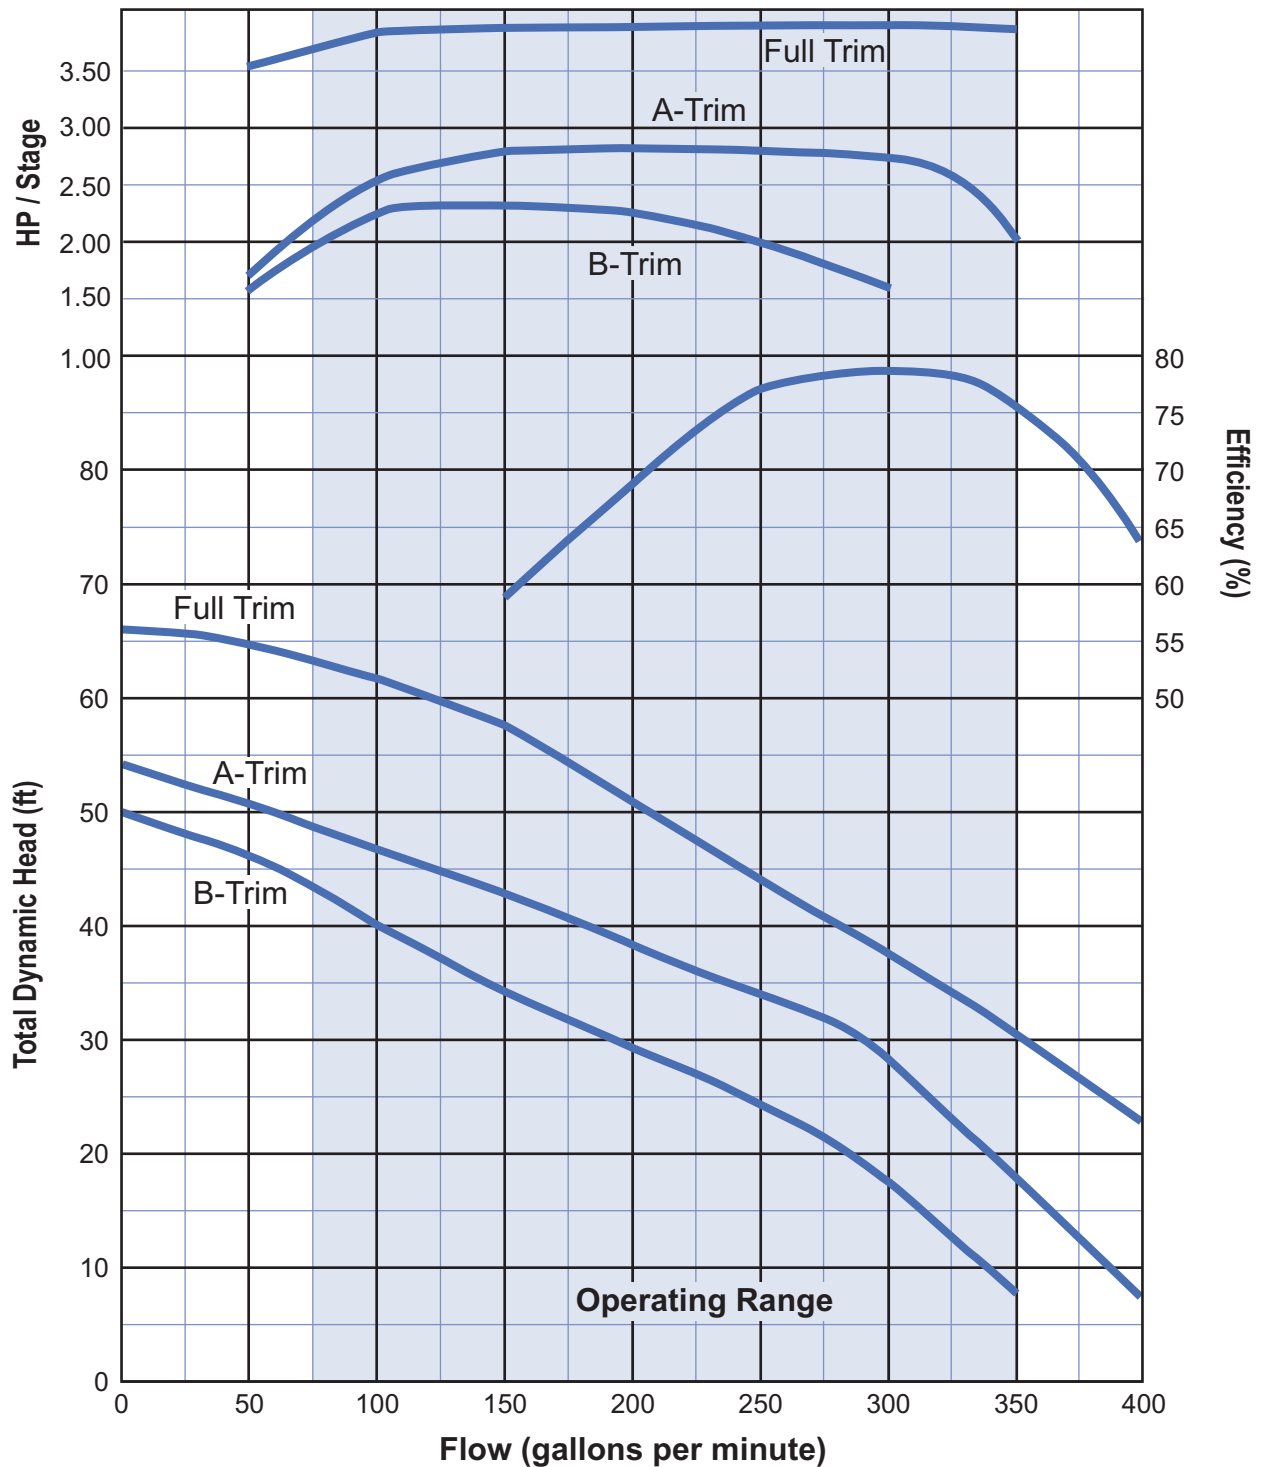

Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.





There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE

WS Series

Webtrol's 8" WS Series Turbine

All stainless steel line of 8" submersible pumps, which are designed for heavy duty and high volume pumping jobs.

The **WS** Series is made entirely of corrosion and abrasion resistant stainless steel.

A perfect choice for municipal water supply and distribution as well as agricultural irrigation and mine dewatering.

Heavy duty, built in check valve for maximum performance and longer life.

Motor mounting specification is in accordance with NEMA standards.

Specifications

- Flows to 650 GPM.
- Heads to 1,340 feet.
- HP range: 7 1/2 - 125 HP, 60Hz



Powered By

Franklin Electric



There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE

Construction And Design Features



Precision cast 304 stainless steel **discharge head*** provides a smooth flow transition with a minimum amount of restriction. Includes a built in, jam free, stainless steel check valve to prevent back flow of water.

A 304 stainless steel **impeller**, precision made to ensure optimal performance and offers superior resistance to abrasion.

Each **diffuser** bowl is crafted out of 304 stainless steel with a Buna-N rubber bearing in each stage.

The **pump shaft** is constructed from heavy duty, cold drawn, 431 stainless steel. Each shaft is produced to the highest standards for straightness and cut to precise lengths.

Every pump has a 304 stainless steel **strainer** to stop debris from entering the pump.

The **motor bracket** is cast from 304 stainless steel and allows mounting on a standard NEMA motor.


Series	*Discharge	O.D. (One Motor Lead)
WS400	5" NPT	7.01" - 6" Mtr. / 7.87 - 8" Mtr.
WS500	5" NPT	7.05" - 6" Mtr. / 8.07 - 8" Mtr.

See price pages for lengths and weights.



There when you need us most


8" WS SERIES SUBMERSIBLE TURBINE FAMILY CURVES

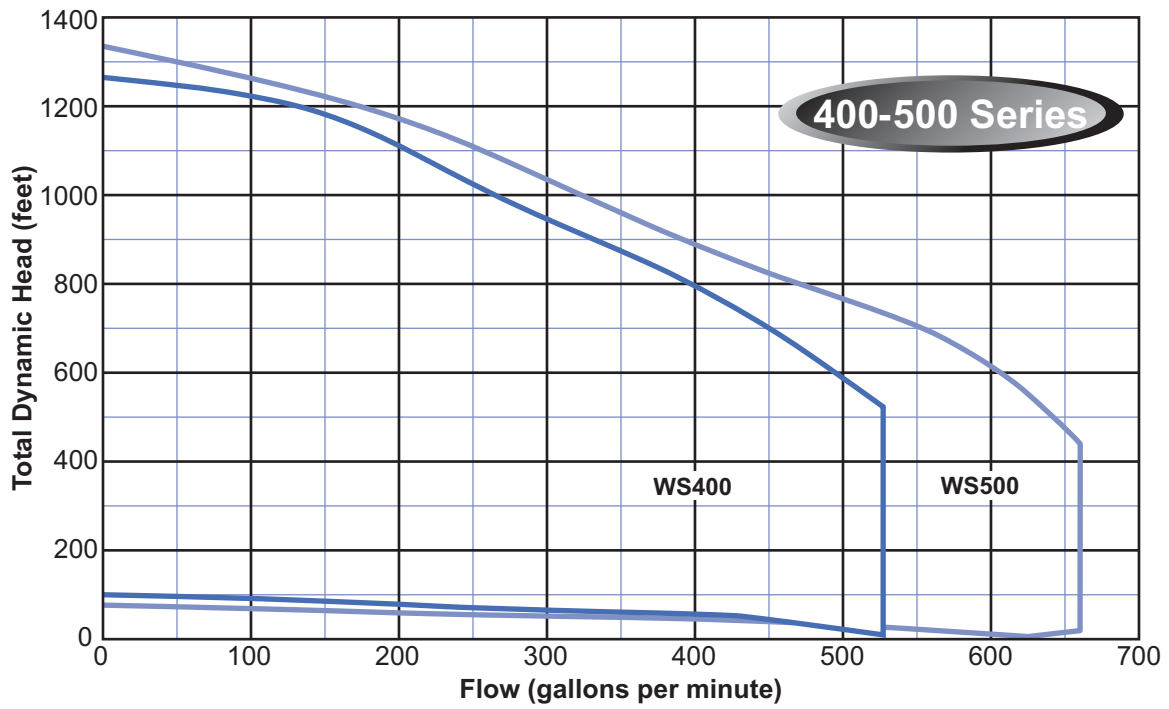



There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE CURVES

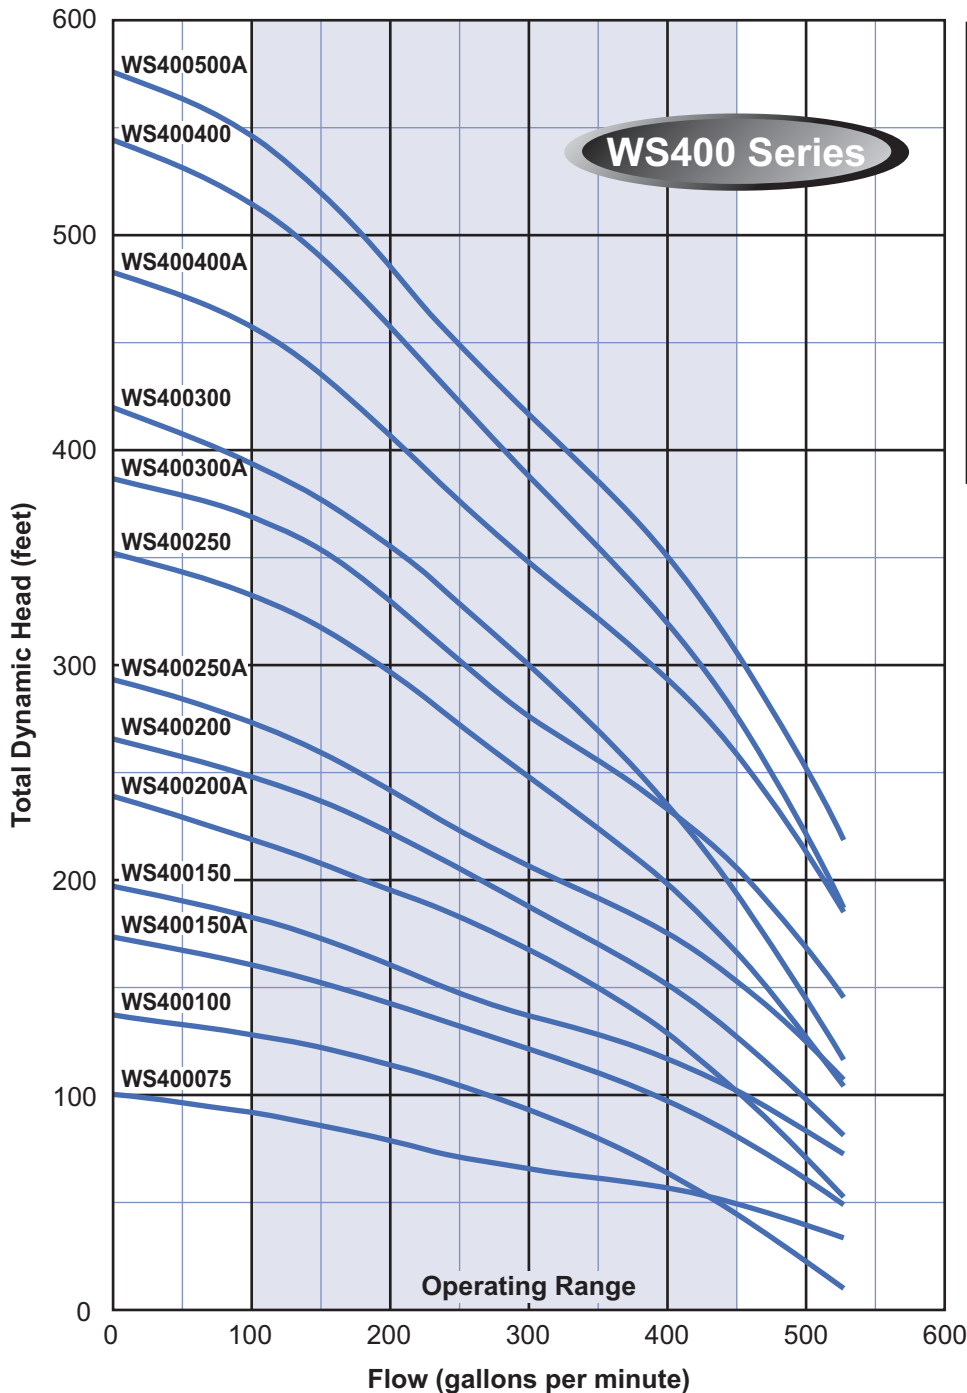

MODEL NO.	HP	STAGES
WS400075	7.5	1
WS400100	10.0	2AB
WS400150A	15.0	2A
WS400150	15.0	2
WS400200A	20.0	3AA
WS400200	20.0	3A
WS400250A	25.0	3
WS400250	25.0	4B
WS400300A	30.0	4
WS400300	30.0	5BB
WS400400A	40.0	5
WS400400	40.0	6B
WS400500A	50.0	6

MODEL NO.: WS400250A2C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE CURVES

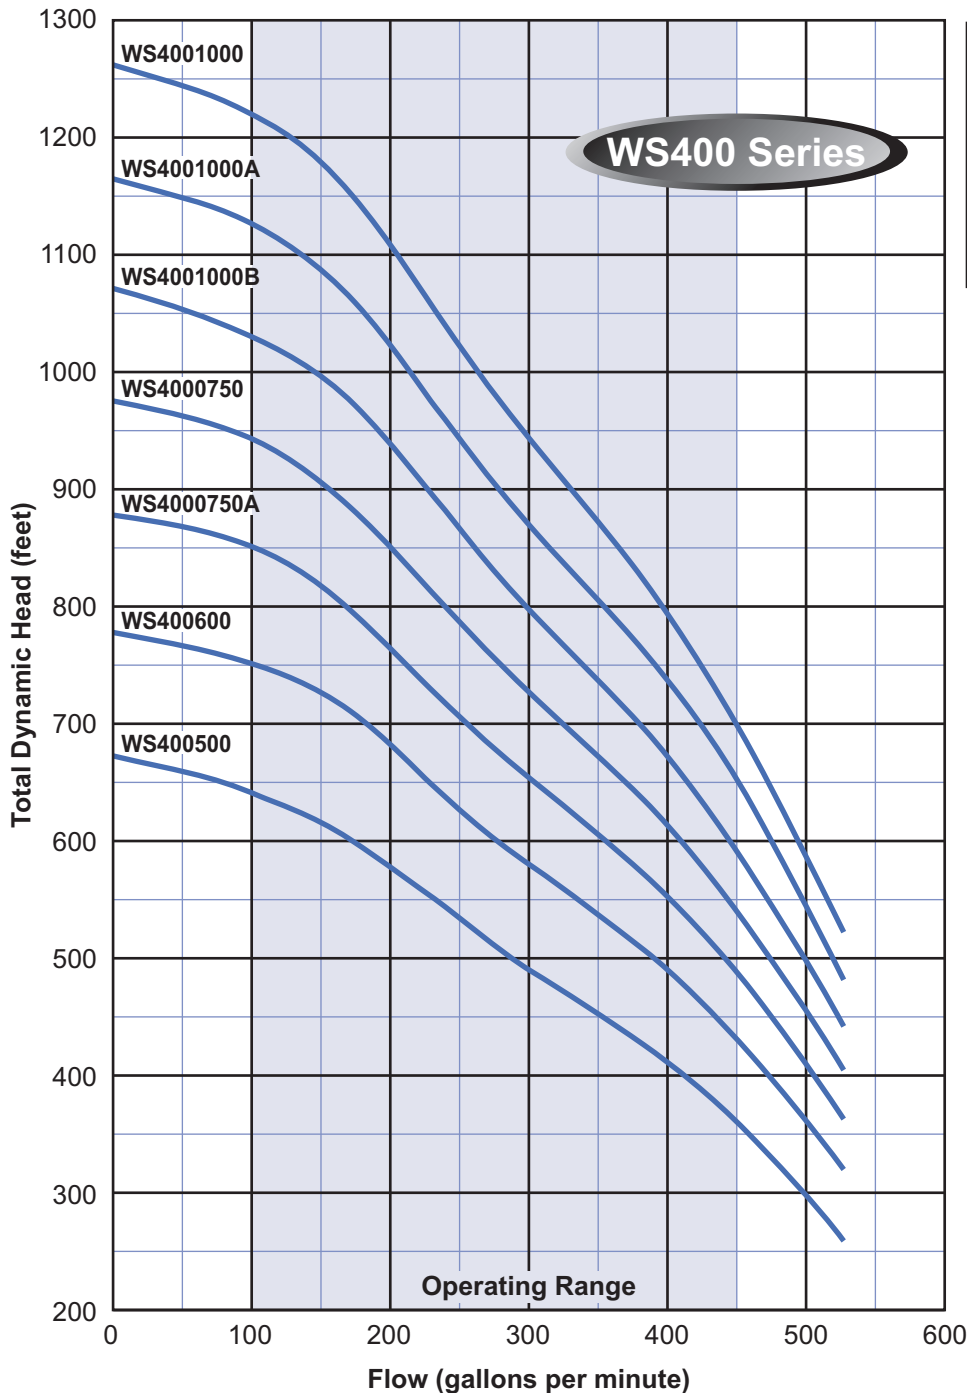

MODEL NO.	HP	STAGES
WS400500	50.0	7
WS400600	60.0	8
WS4000750A	75.0	9
WS4000750	75.0	10
WS4001000B	100.0	11
WS4001000A	100.0	12
WS4001000	100.0	13

MODEL NO.: WS4000750A4C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE CURVES

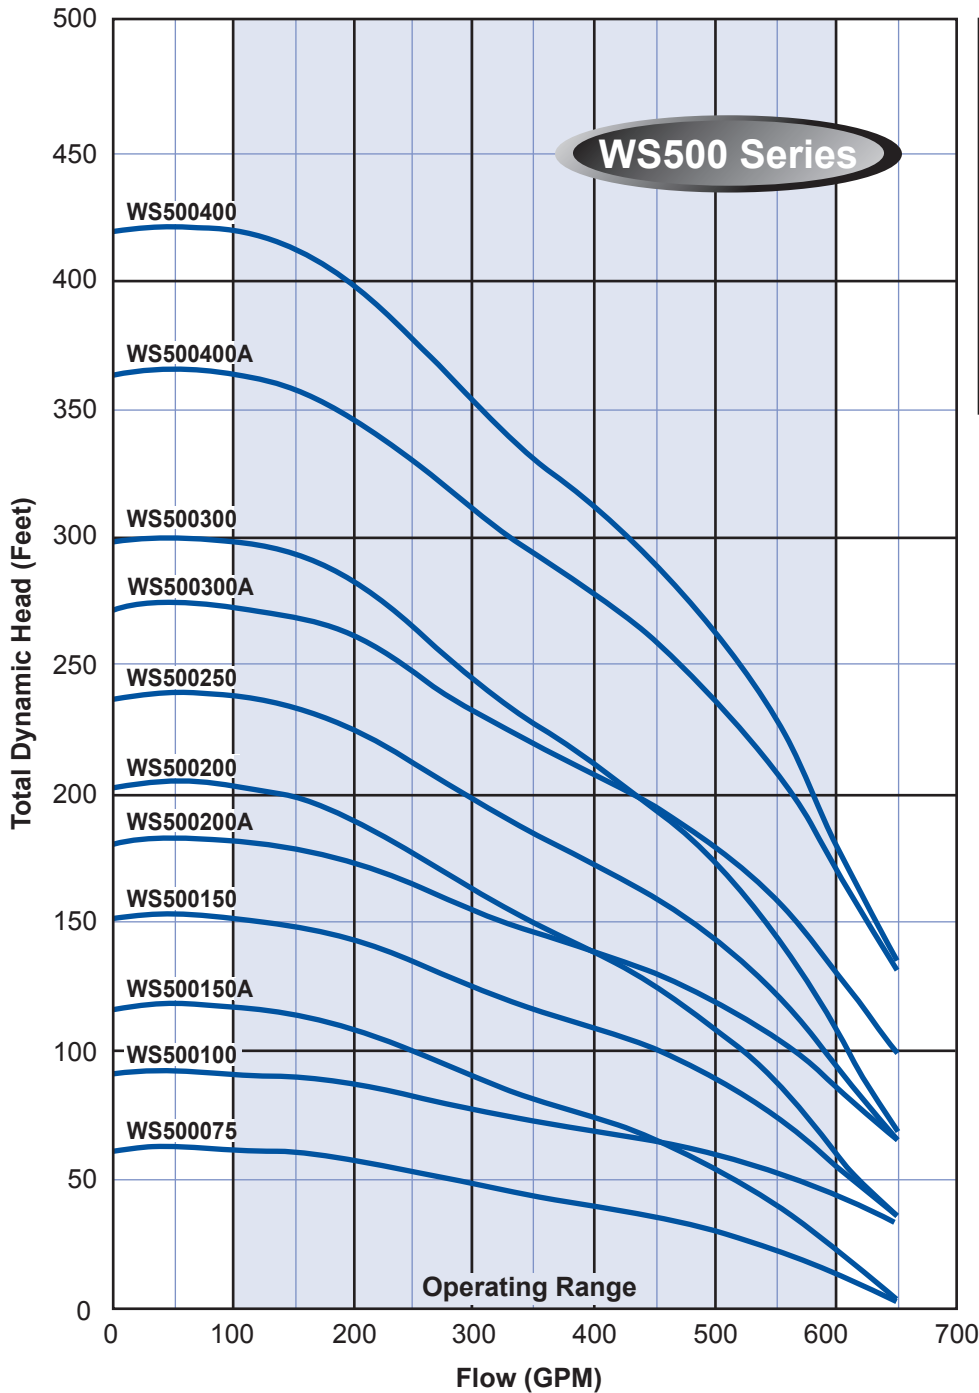

MODEL NO.	HP	STAGES
WS500075	7.5	1A
WS500100	10.0	1
WS500150A	15.0	2AB
WS500150	15.0	2B
WS500200A	20.0	2
WS500200	20.0	3BB
WS500250	25.0	3B
WS500300A	30.0	3
WS500300	30.0	4AB
WS500400A	40.0	4
WS500400	40.0	5B

MODEL NO.: WS500200A2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

8" WS SERIES SUBMERSIBLE TURBINE CURVES

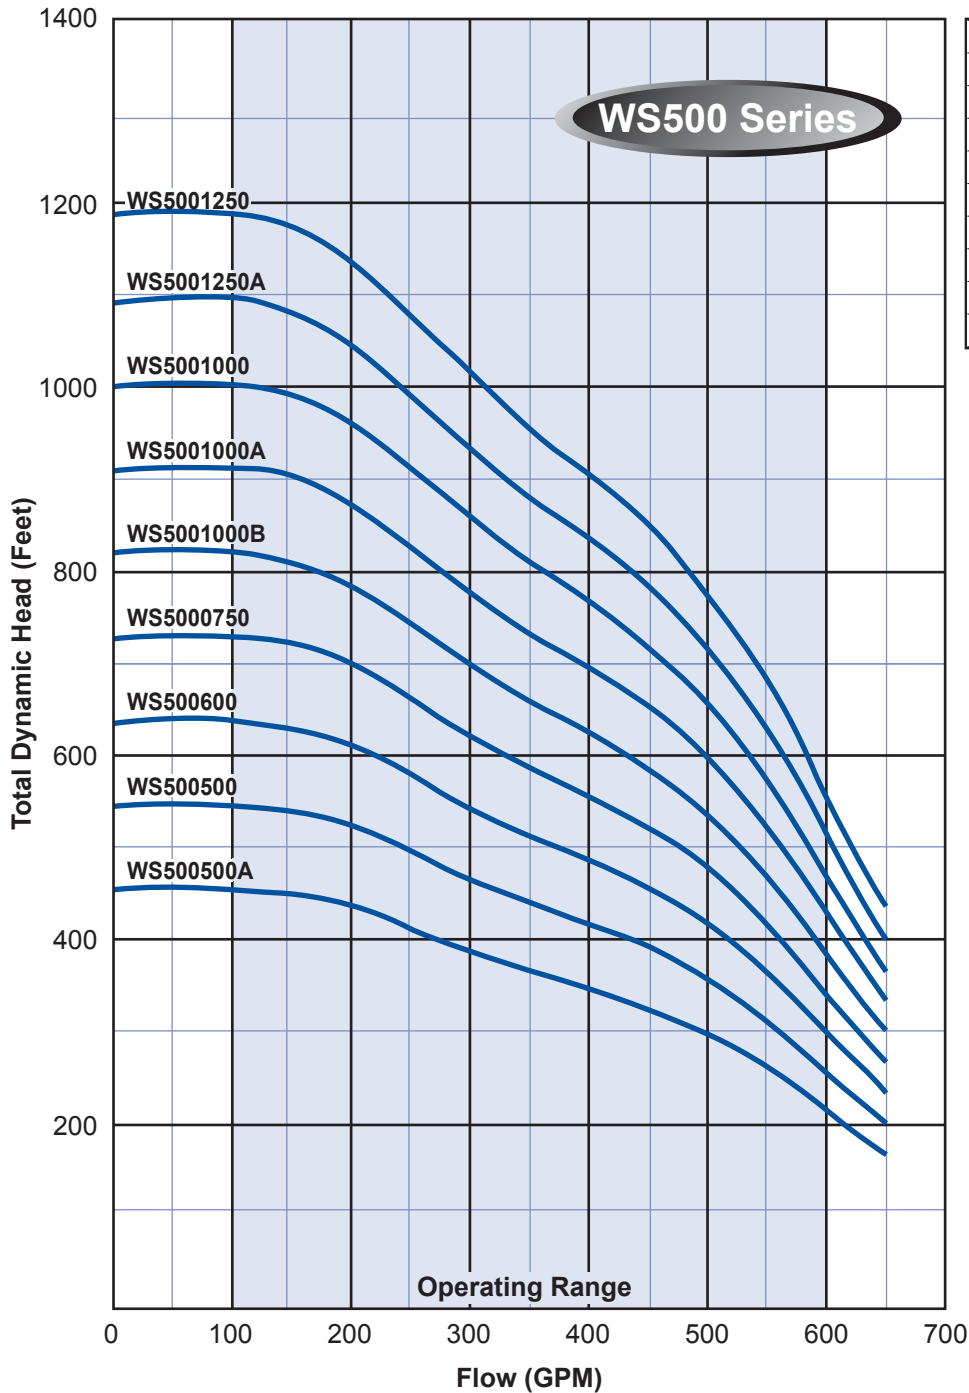

MODEL NO.	HP	STAGES
WS500500A	50.0	5
WS500500	60.0	6
WS500600	60.0	7
WS5000750	75.0	8
WS5001000B	100.0	9
WS5001000A	100.0	10
WS5001000	100.0	11
WS5001250A	125.0	12
WS5001250	125.0	13

MODEL NO.: WS500500A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

8" WS 400 SERIES HP / EFF CURVE

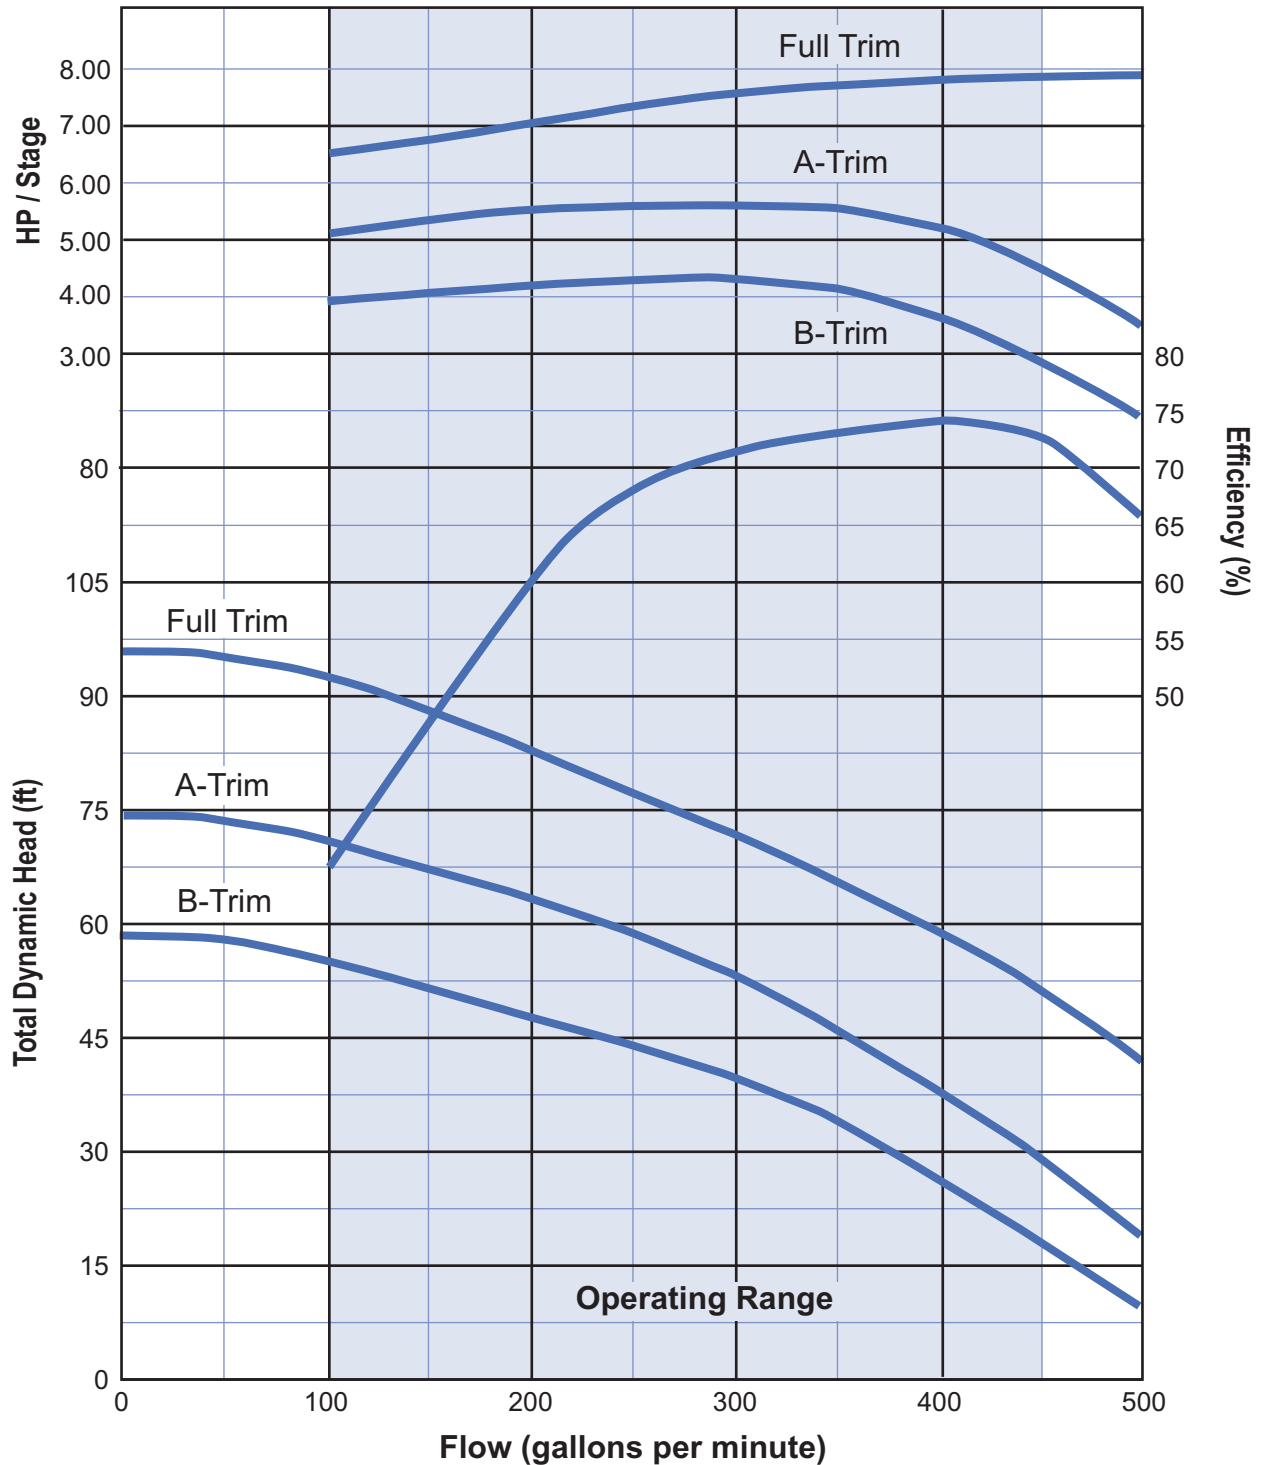


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.




There when you need us most

8" WS 500 SERIES HP / EFF CURVE

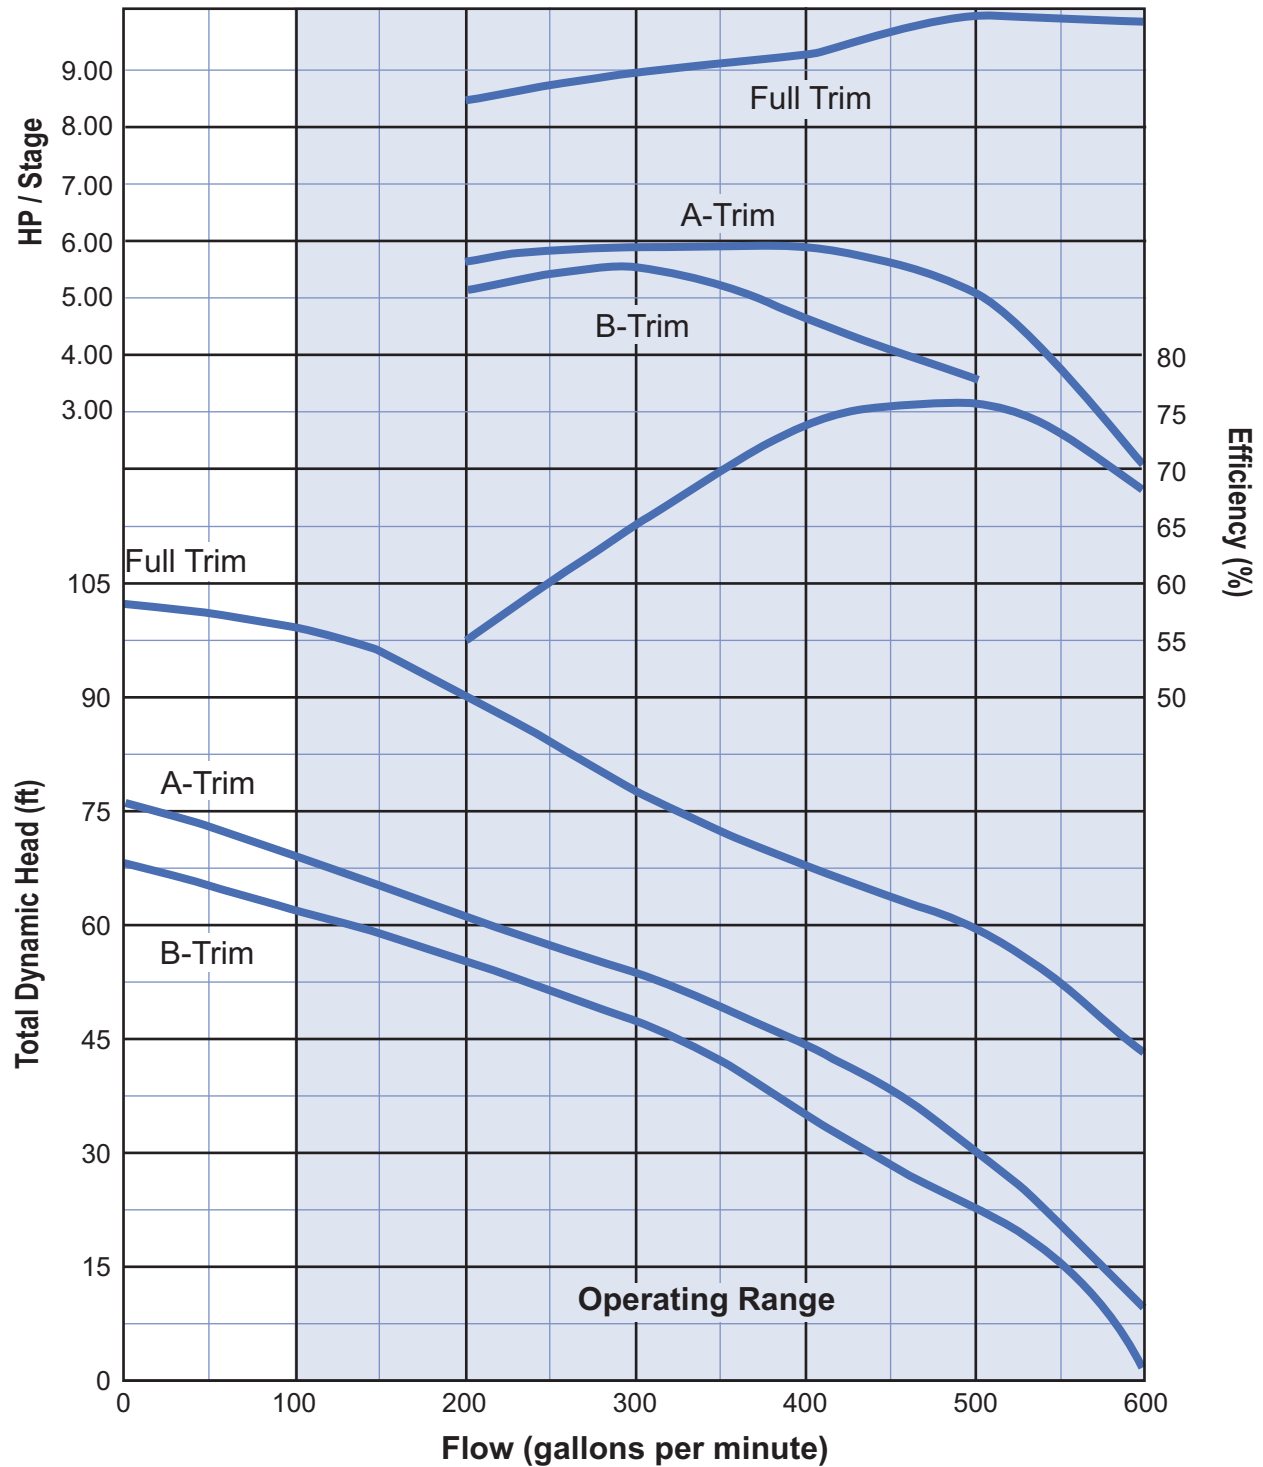

Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



10" WS SERIES SUBMERSIBLE TURBINE



WS Series

Webtrol's 10" WS Series Turbine

All stainless steel line of 10" submersible pumps, which are designed for heavy duty and high volume pumping jobs.

The **WS** Series is made entirely of corrosion and abrasion resistant stainless steel.

A perfect choice for municipal water supply and distribution as well as agricultural irrigation and mine dewatering.

Heavy duty, built in check valve for maximum performance and longer life.

Motor mounting specification is in accordance with NEMA standards.

Specifications

- Flows to 1,400 GPM
- Heads to 1,800 feet.
- HP range: 15 - 250 HP, 60Hz



Powered By

Franklin Electric



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE

Construction And Design Features



Precision cast 304 stainless steel **discharge head*** provides a smooth flow transition with a minimum amount of restriction. Includes a built in, jam free, stainless steel check valve to prevent back flow of water.

A 304 stainless steel **impeller**, precision made to ensure optimal performance and offers superior resistance to abrasion.

Each **diffuser** bowl is crafted out of 304 stainless steel with a Buna-N rubber bearing in each stage.

The **pump shaft** is constructed from heavy duty, cold drawn, 431 stainless steel. Each shaft is produced to the highest standards for straightness and cut to precise lengths.

Every pump has a 304 stainless steel **strainer** to stop debris from entering the pump.

The **motor bracket** is cast from 304 stainless steel and allows mounting on a standard NEMA motor.


Series	*Discharge	O.D. (One Motor Lead)
WS600	6" NPT	8.31" - 6" Mtr. / 8.39" - 8" Mtr.
WS800	6" NPT	8.31" - 6" Mtr. / 8.39" - 8" Mtr.
WS1100	6" NPT	9.33" - 6" Mtr. / 9.33" - 8" Mtr.

See price pages for lengths and weights.



There when you need us most


10" WS SERIES SUBMERSIBLE TURBINE FAMILY CURVES

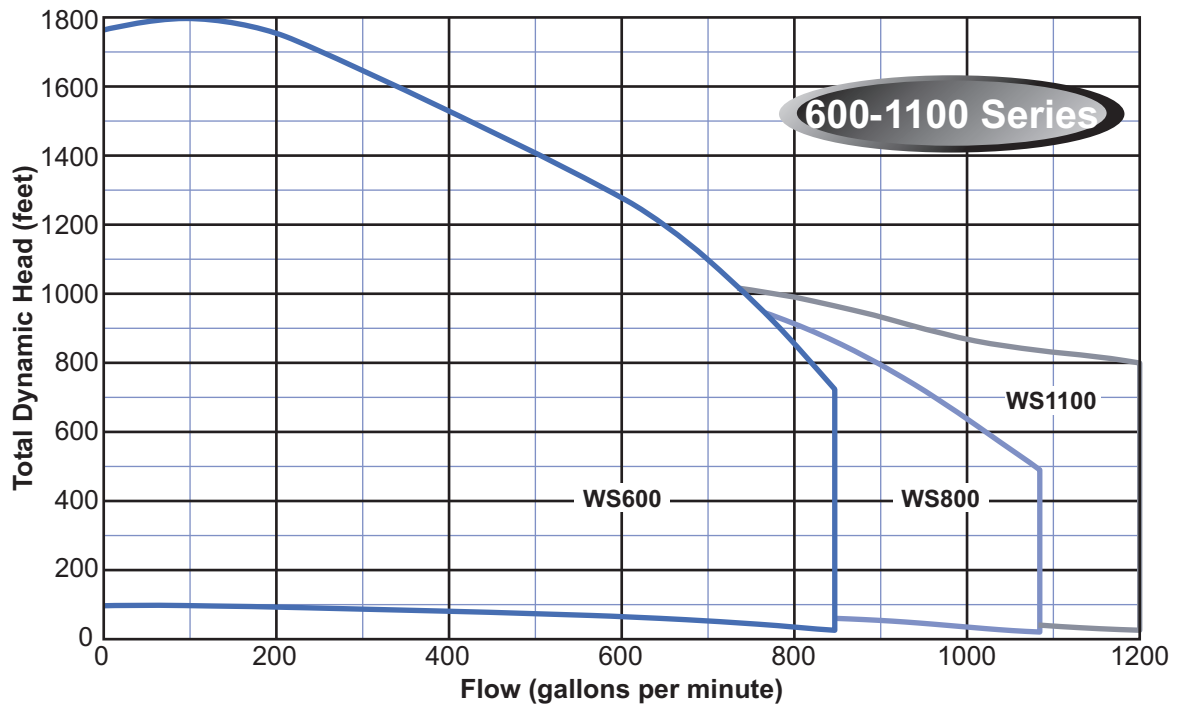



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

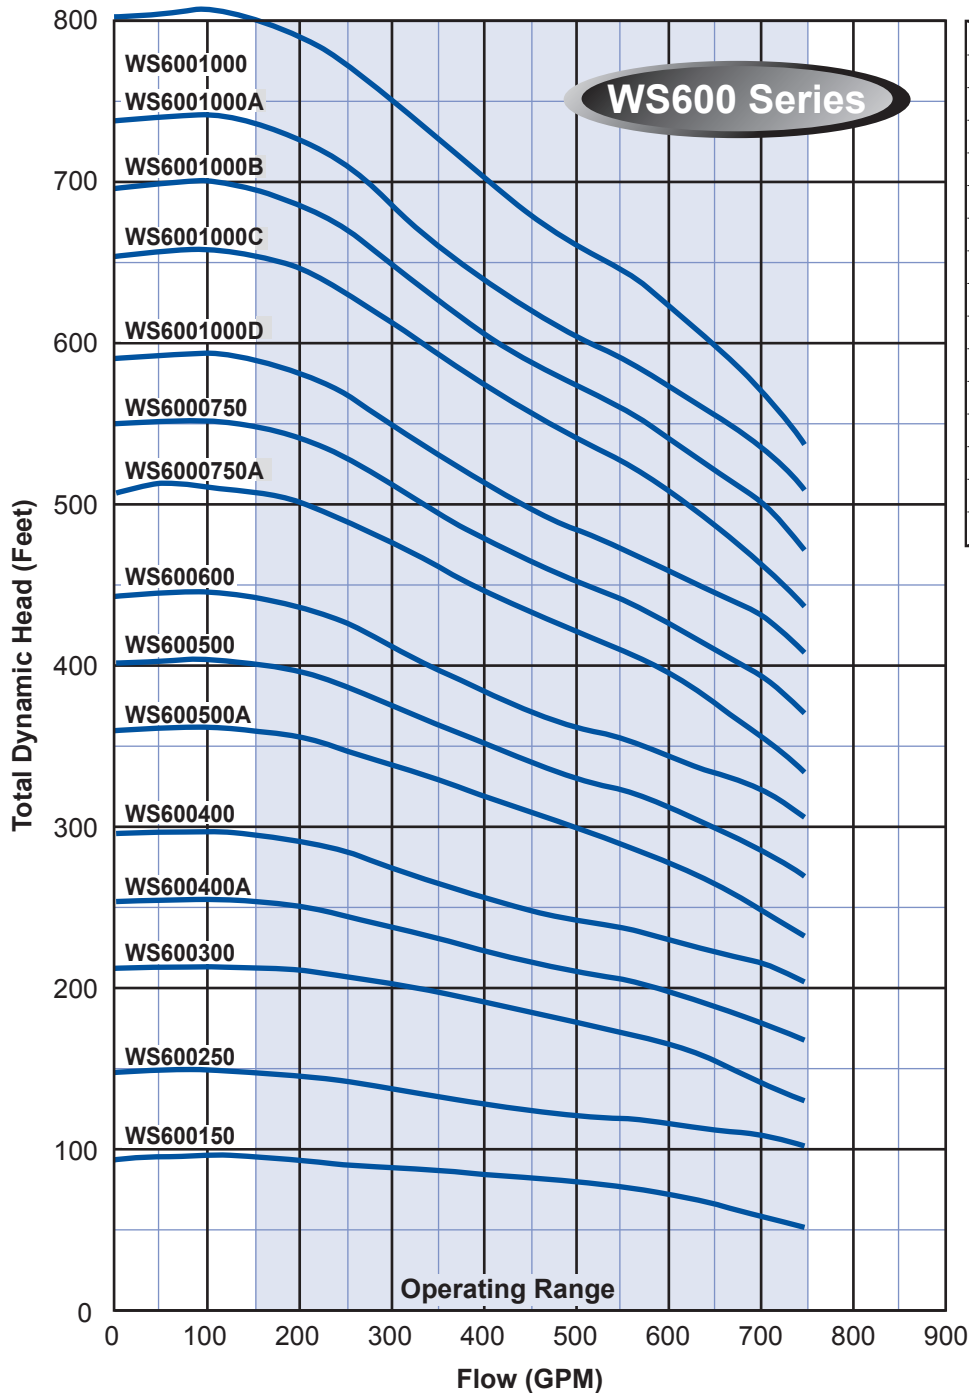

MODEL NO.	HP	STAGES
WS600150	15.0	1-A
WS600250	25.0	1
WS600300	30.0	2-AA
WS600400A	40.0	2-A
WS600400	40.0	2
WS600500A	50.0	3-AA
WS600500	50.0	3-A
WS600600	60.0	3
WS6000750A	75.0	4-AA
WS6000750	75.0	4-A
WS6001000D	100.0	4
WS6001000C	100.0	5-AA
WS6001000B	100.0	5-A
WS6001000A	125.0	5
WS6001000	125.0	6-AA

MODEL NO.: WS600400A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

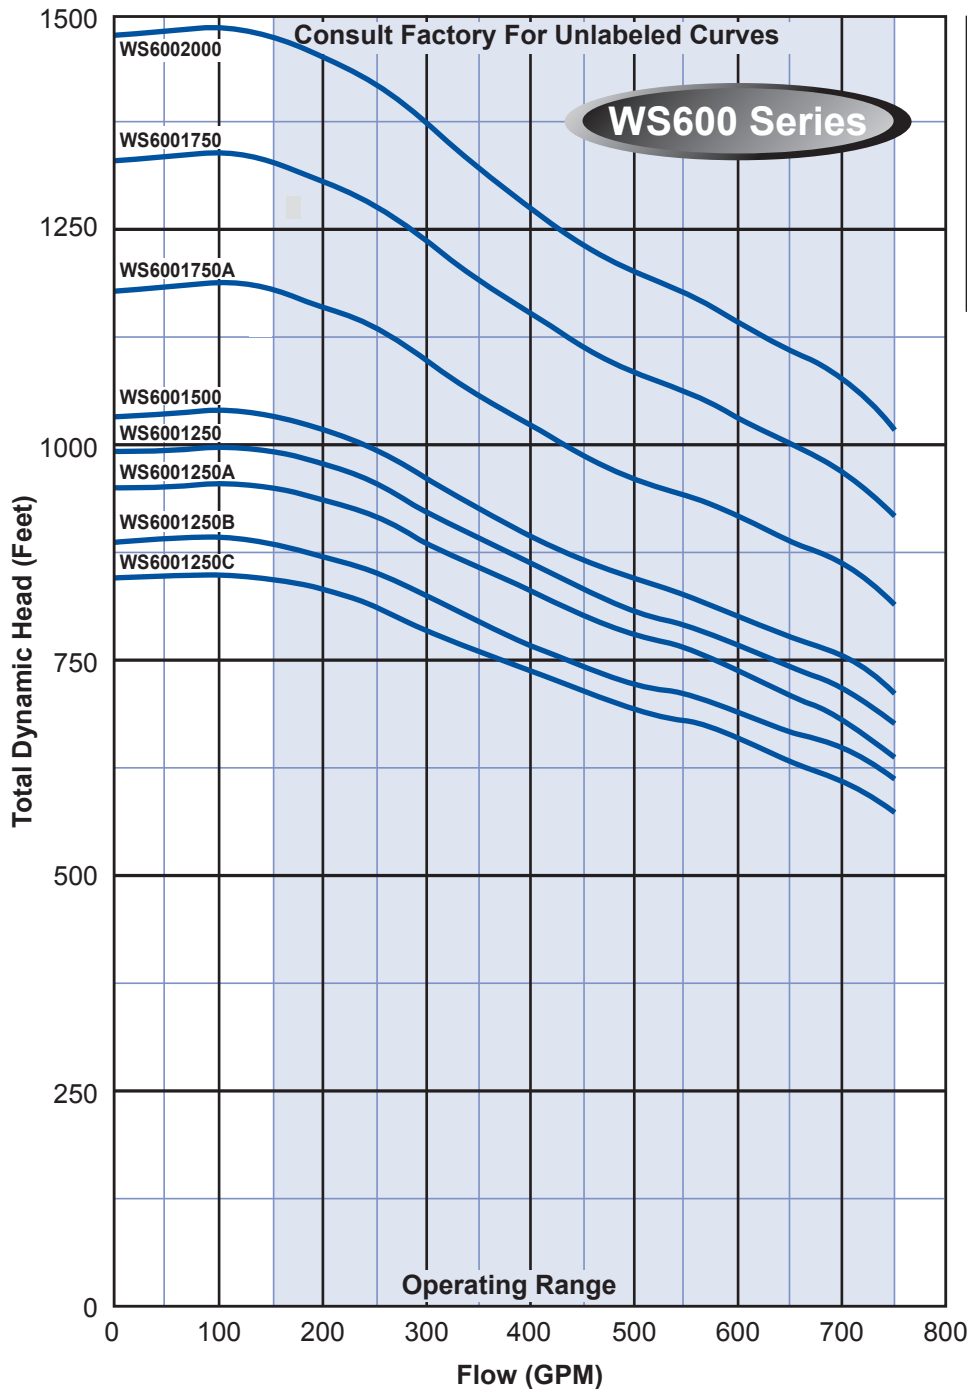

MODEL NO.	HP	STAGES
WS6001250C	125.0	6-A
WS6001250b	125.0	6
WS6001250A	125.0	7-AA
WS6001250	125.0	7-A
WS6001500	150.0	7
WS6001750A	175.0	8
WS6001750	175.0	9
WS6002000	200.0	10

MODEL NO.: WS6001250C4C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

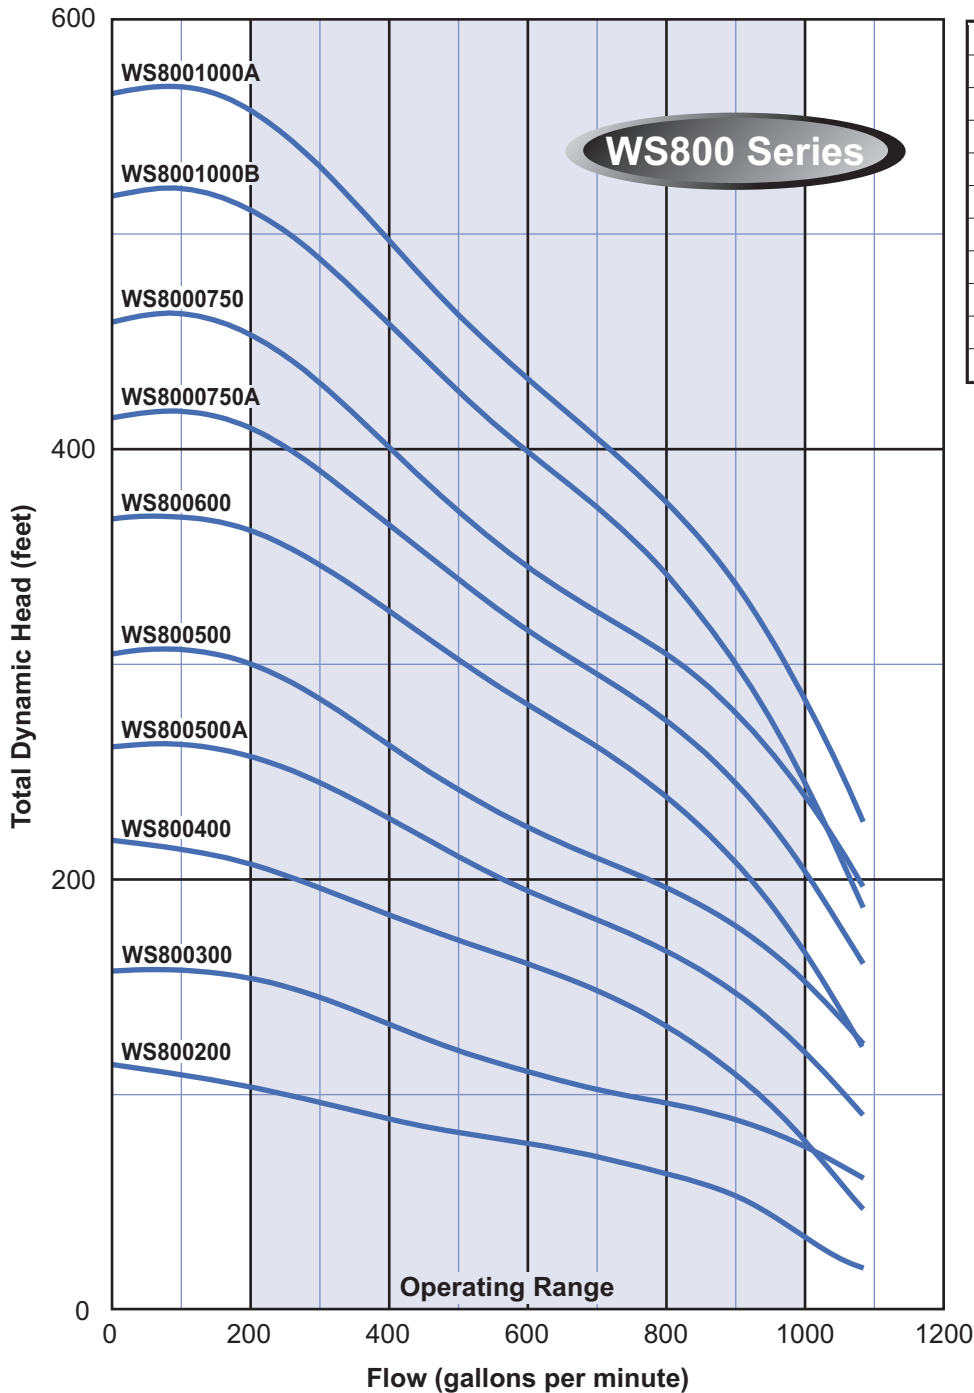

MODEL NO.	HP	STAGES
WS800200	20.0	1-A
WS800300	30.0	1
WS800400	40.0	2-AA
WS800500A	50.0	2-A
WS800500	50.0	2
WS800600	60.0	3-AA
WS8000750A	75.0	3-A
WS8000750	75.0	3
WS8001000B	100.0	4-AA
WS8001000A	100.0	4-A

MODEL NO.: WS800500A4C3

Series/Nominal Rated Flow (GPM)

Horsepower

Divide by 10 for Rated Motor Horsepower
(Example $20 \div 10 = 2.0$ or 2HP)

Impeller Trim

Voltage

1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control

Blank = 2 wire C = Optional Control

Phase (PH)

Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

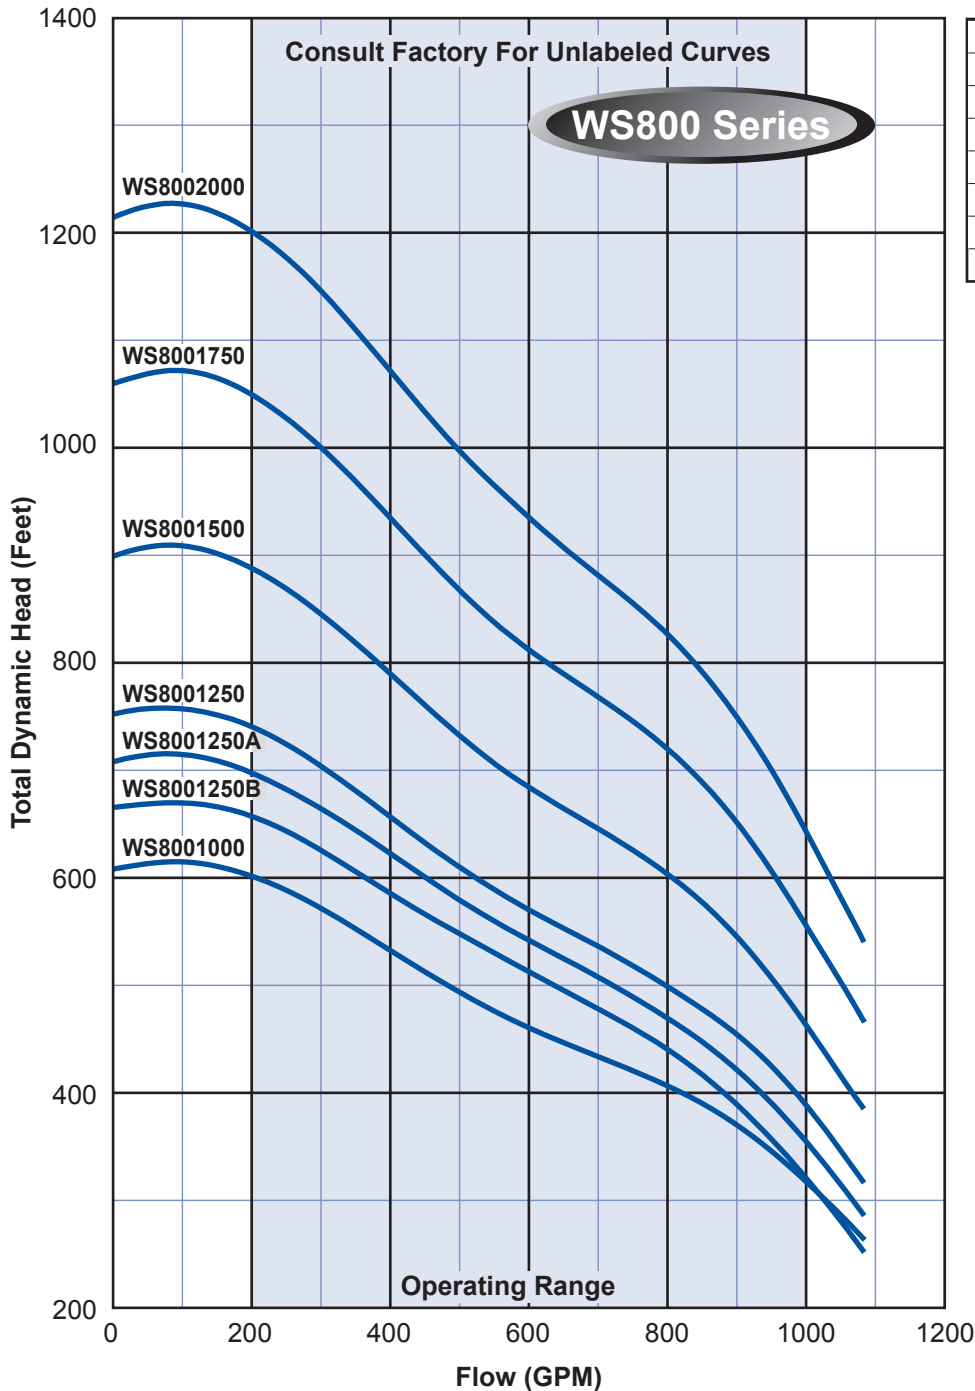

MODEL NO.	HP	STAGES
WS8001000	100.0	4
WS8001250B	125.0	5-AA
WS8001250A	125.0	5-A
WS8001250	125.0	5
WS8001500	150.0	6
WS8001750	175.0	7
WS8002000	200.0	8

MODEL NO.: WS8001250B4C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

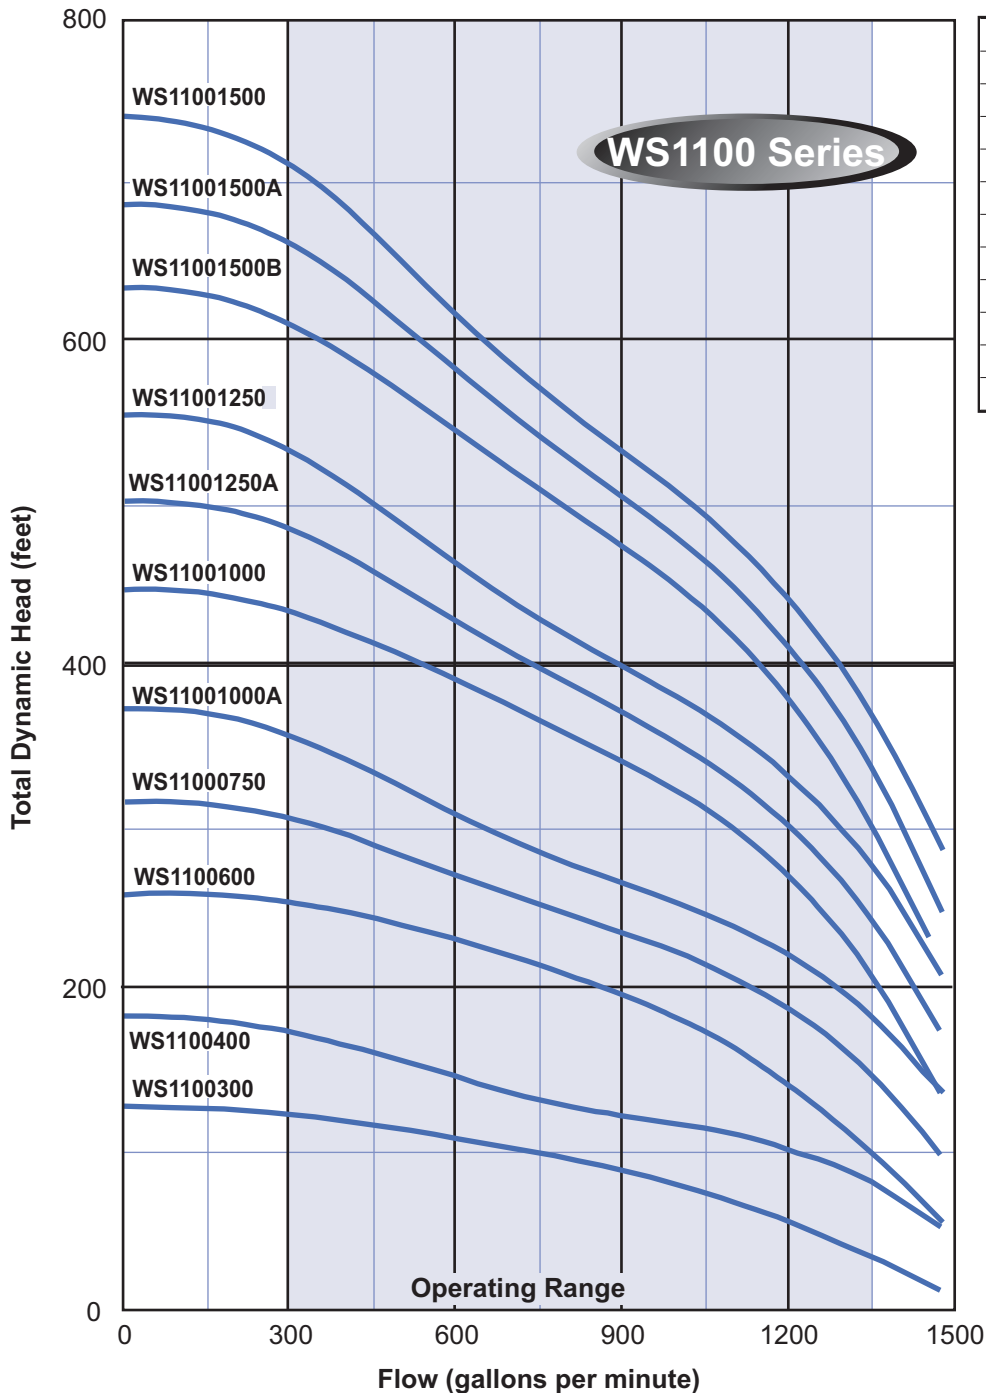

MODEL NO.	HP	STAGES
WS1100300	30.0	1-A
WS1100400	40.0	1
WS1100600	60.0	2-AA
WS1100750	75.0	2-A
WS11001000A	100.0	2
WS11001000	100.0	3-AA
WS11001250A	125.0	3-A
WS11001250	125.0	3
WS11001500B	150.0	4-AA
WS11001500A	150.0	4-A
WS11001500	150.0	4

MODEL NO.:WS11001000A4C3

Series/Nominal Rated Flow
(GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS SERIES SUBMERSIBLE TURBINE CURVES

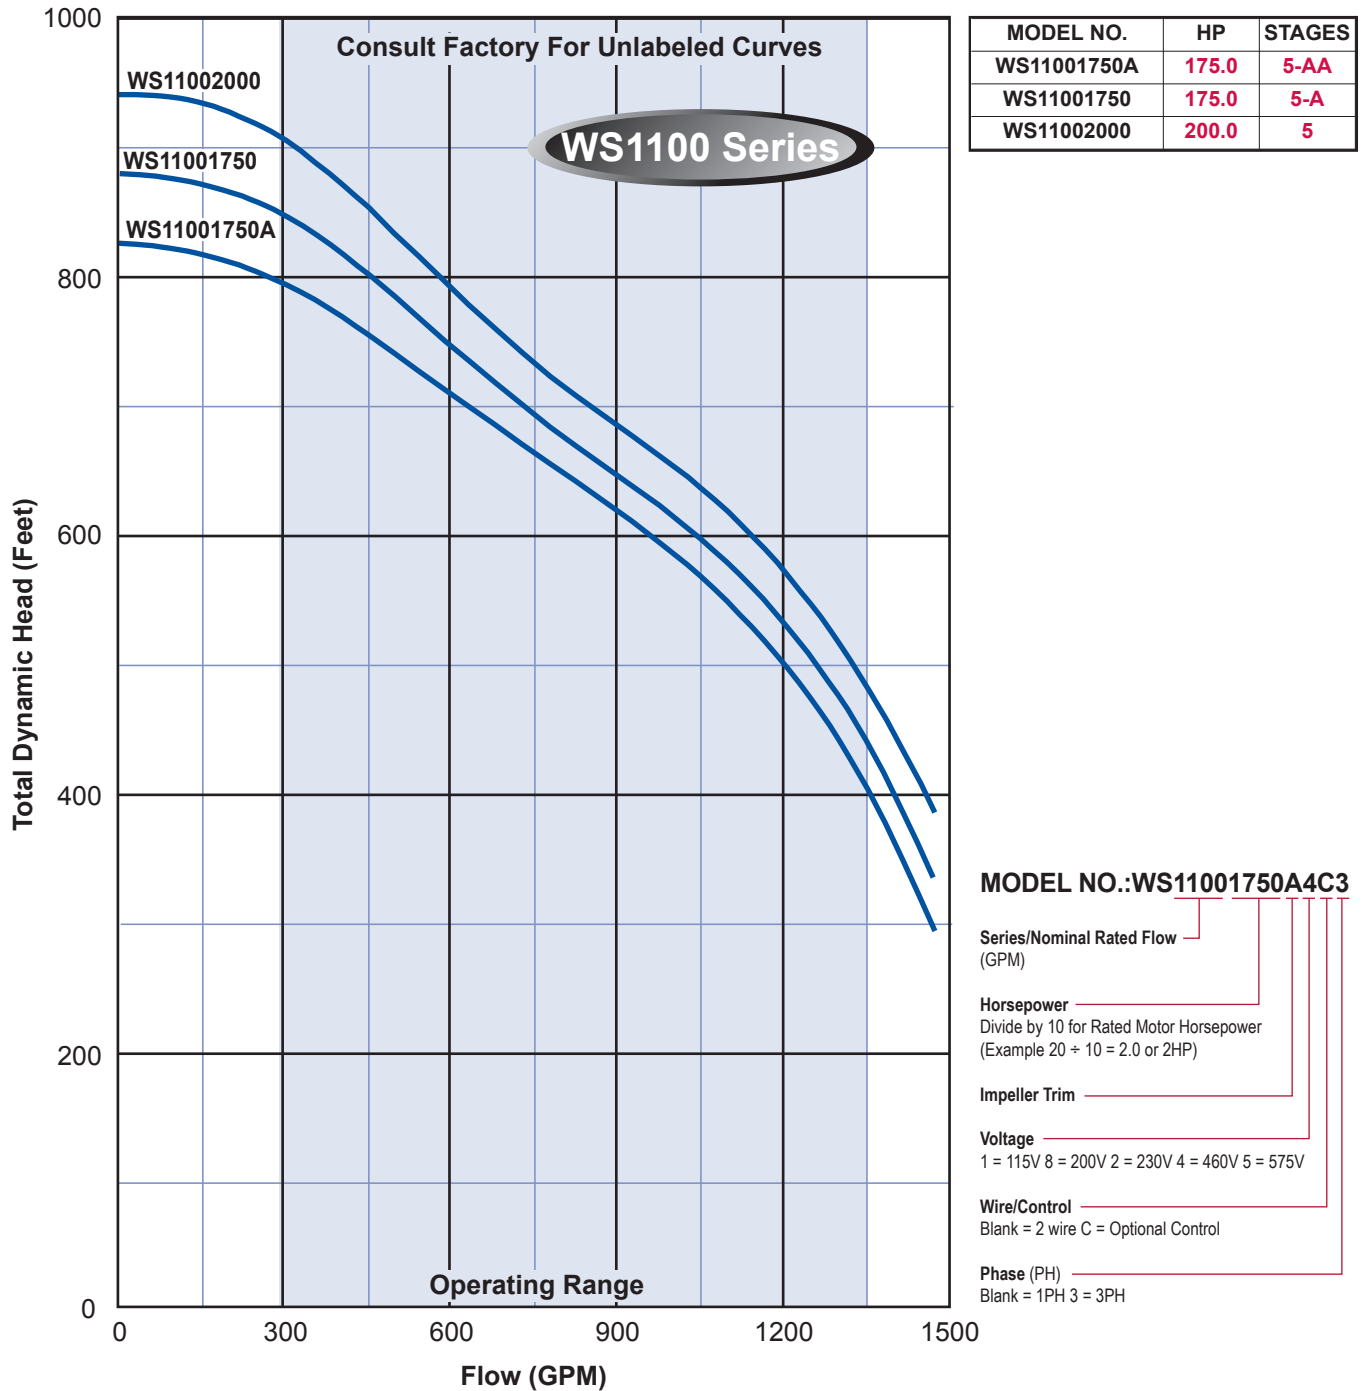


Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS 600 SERIES HP / EFF CURVE

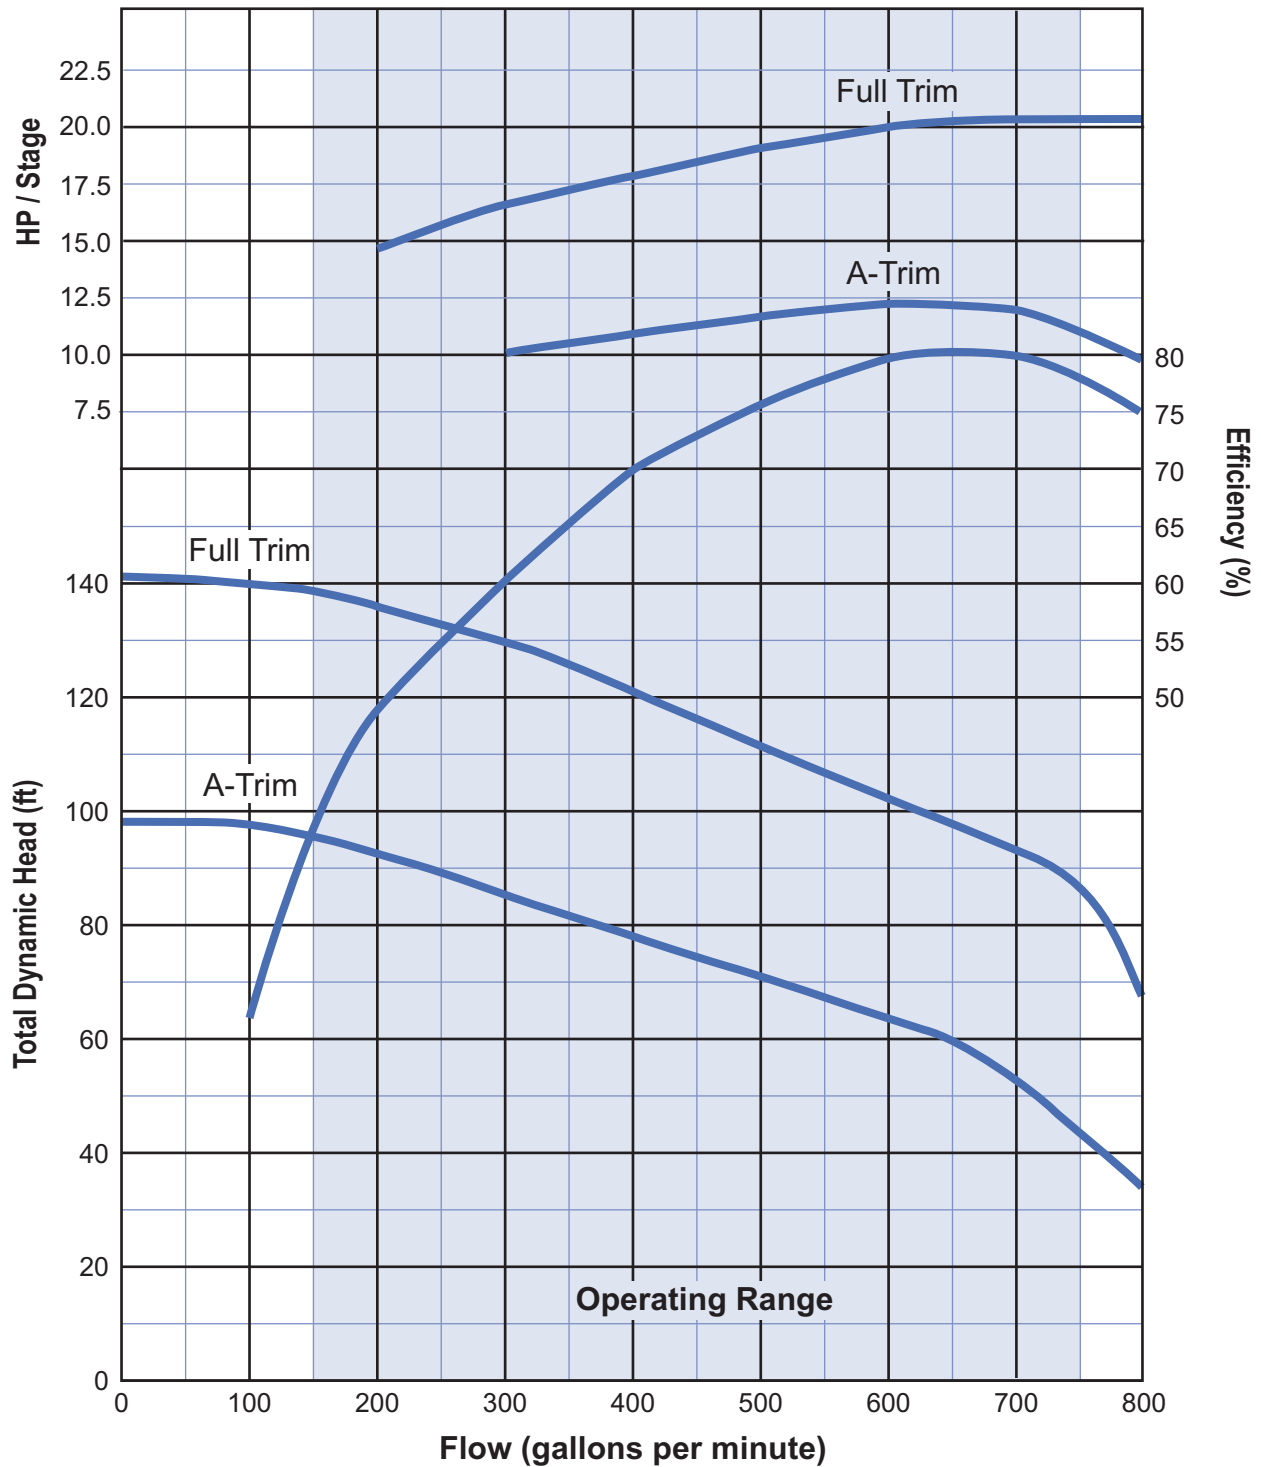


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS 800 SERIES HP / EFF CURVE

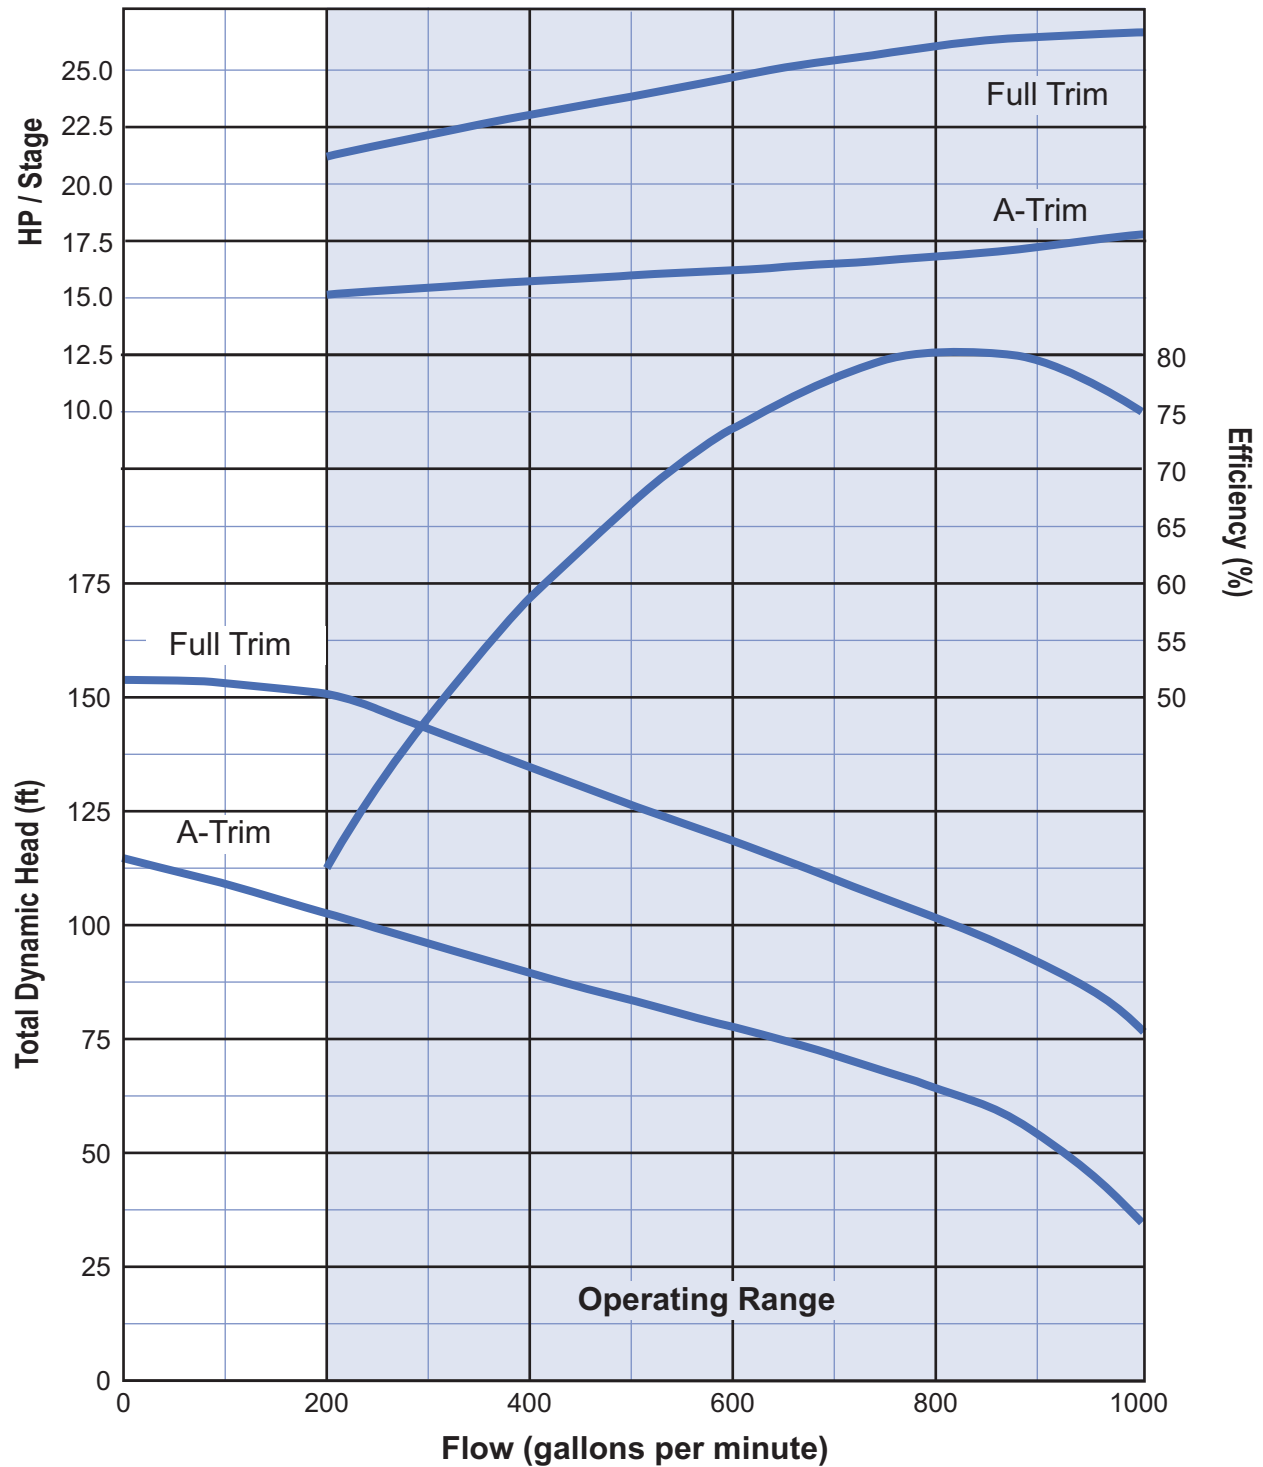


Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.



There when you need us most

10" WS 1100 SERIES HP / EFF CURVE

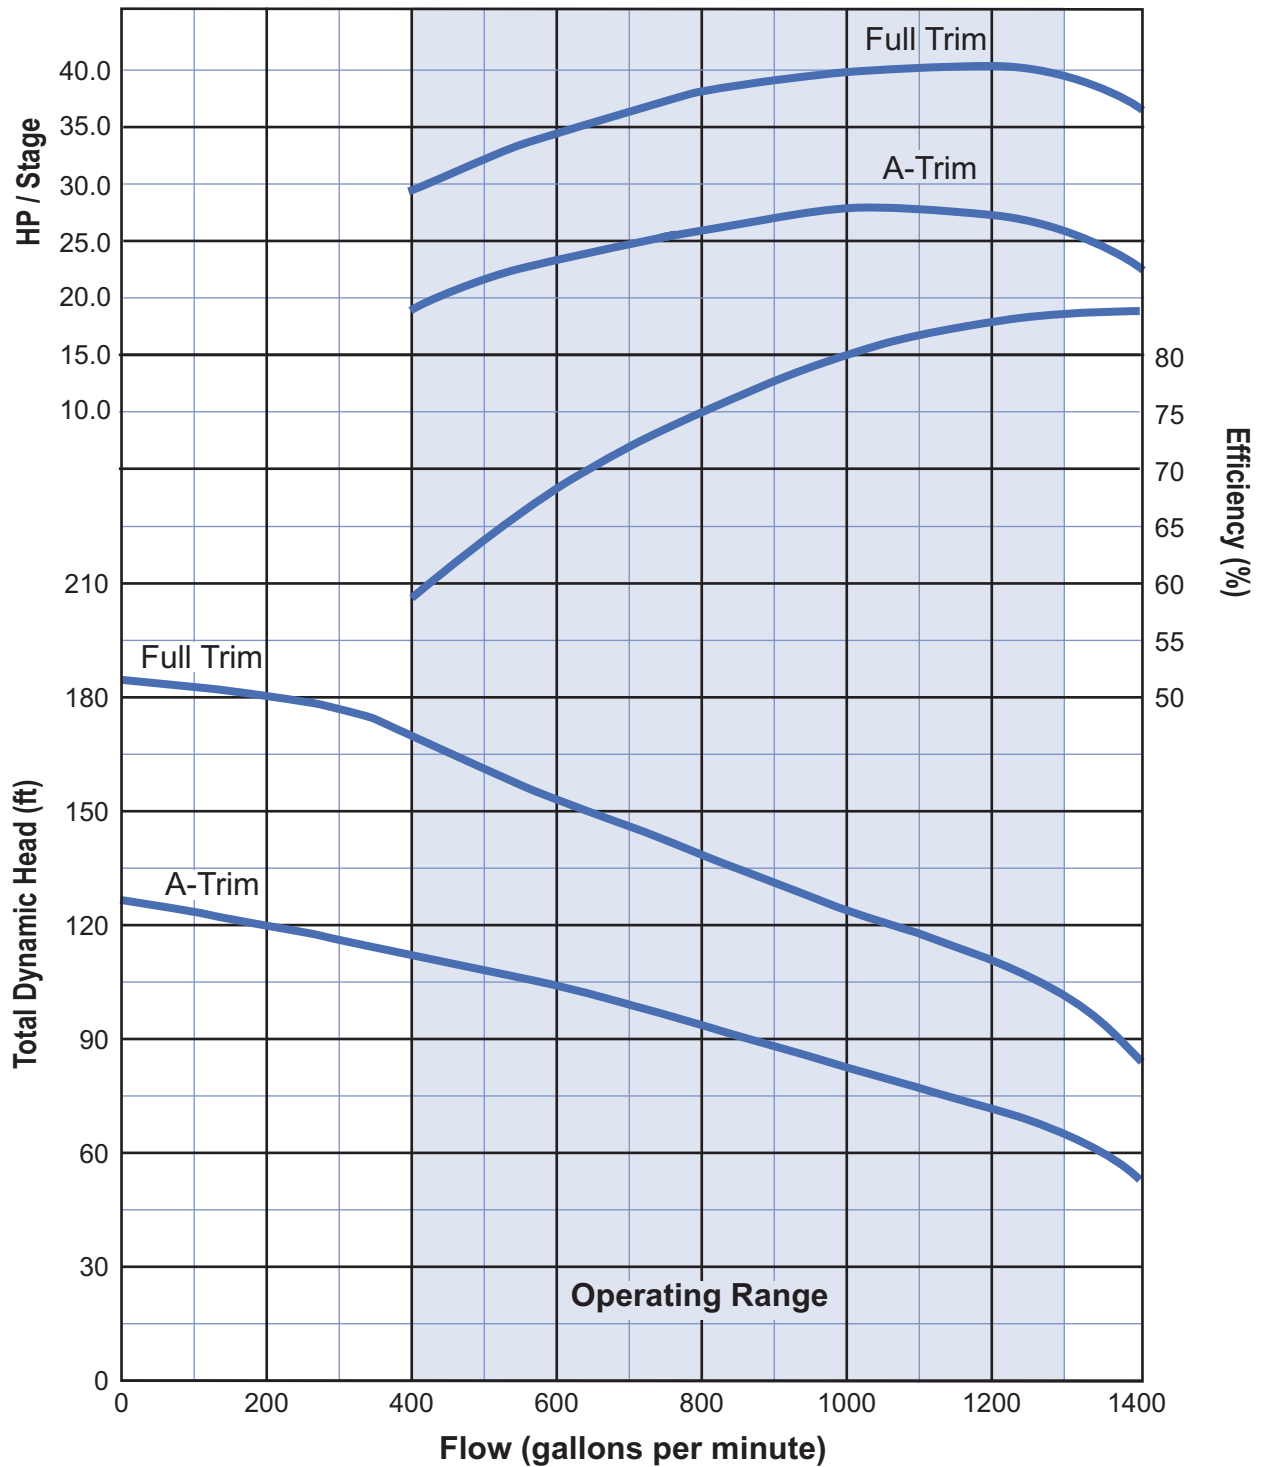

Note:

These curves are based on single stage, factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.

There when you need us most

MOTORS & CONTROLS

Submersible Motors, Control Boxes & Control Panels





There when you need us most

4 INCH SUBMERSIBLE MOTORS

MOTOR SIZE	WIRE	HP	PH	VOLTS	MODEL NO.	WT (LBS.)
4"	2	1/2	1	115	10S15SP-M	18
			1	230	10S25SP-M	18
		3/4	1	230	10S27SP-M	21
		1	1	230	10S210SP-M	24
		1 1/2	1	230	10S215SP-M	31
	3	1/2	1	115	10S15-M	19
			1	230	10S25-M	19
		3/4	1	230	10S27-M	21
		1	1	230	10S210-M	24
		1 1/2	1	230	10S215-M	28
			3	230	10S215-M3PH	24
			3	460	10S415-M3PH	24
		2	1	230	10S220-M	33
			3	230	10S220-M3PH	28
			3	460	10S420-M3PH	28
		3	1	230	10S230-M	41
			3	230	10S230-M3PH	35
			3	460	10S430-M3PH	35
		5	1	230	10S250-M	70
			3	230	10S250-M3PH	55
			3	460	10S450-M3PH	55
		7 1/2	3	230	10S275-M3PH	70
			3	460	10S475-M3PH	70
		10	3	460	10S4100-M3PH	75

Note: 1). Add "R" after the "10S" for a Faradyne Motor (EX: 10SR210-M).
 2). 50 cycle motors are available upon request.
 3). 316 stainless steel motors are available upon request.



There when you need us most

6 INCH SUBMERSIBLE MOTORS

MOTOR SIZE	WIRE	HP	PH	VOLTS	MODEL NO.	WT (LBS.)
6"	3	5	1	230	10S250-6M4	110
			3	230	10S250-6M3PH	101
			3	460	10S450-6M3PH	101
		7 1/2	1	230	10S275-6M4	123
			3	230	10S275-6M3PH	108
			3	460	10S475-6M3PH	108
		10	1	230	10S2100-6M4	141
			3	230	10S2100-6M3PH	116
			3	460	10S4100-6M3PH	116
		15	1	230	10S2150-M4	154
			3	230	10S2150-M3PH	129
			3	460	10S4150-M3PH	129
		20	3	230	10S2200-M3PH	145
			3	460	10S4200-M3PH	145
		25	3	230	10S2250-M3PH	156
			3	460	10S4250-M3PH	156
		30	3	230	10S2300-M3PH	174
			3	460	10S4300-M3PH	174
		40	3	460	10S4400-M3PH	202
		50	3	460	10S4500-M3PH	300
		60	3	460	10S4600-M3PH	330

7 INCH SUBMERSIBLE MOTORS (VANSAN ONLY)

MOTOR SIZE	WIRE	HP	PH	VOLTS	MODEL NO.	WT (LBS.)
7"	3	50	3	460	10SV4500-7M3	320
		60	3	460	10SV4600-7M3	350
		75	3	460	10SV4750-7M3	375

8 INCH SUBMERSIBLE MOTORS

MOTOR SIZE	WIRE	HP	PH	VOLTS	MODEL NO.	WT (LBS.)
8"	3	40	3	460	10S4400-8M3PH	320
		50	3	460	10S4500-8M3PH	345
		60	3	460	10S4600-8M3PH	375
		75	3	460	10S4750-M3PH	430
		100	3	460	10S41000-M3PH	530
		125	3	460	10S41250-M3PH	700
		150	3	460	10S41500-M3PH	840
		175	3	460	10S41750-M3PH	925
		200	3	460	10S42000-M3PH	1040

Note: 1). Add "V" after the "10S" for a Vansan Motor, drop "PH" and put size in front of M (Example: 10SV4300-6M3).
 2). 50 cycle motors are available upon request. 3). 316 stainless steel motors are available upon request. 4). Franklin only



There when you need us most

SUBMERSIBLE MOTOR CONTROL BOXES

HP	VOLTS	Standard Control Boxes		Deluxe Control Boxes		Capacitor Run "CRC" Control Boxes	
		MODEL NUMBER	WT. (LBS.)	MODEL NUMBER	WT. (LBS.)	MODEL NUMBER	WT. (LBS.)
1/2	115	31S15-M	4				
1/2	230	31S25-M	4			31S25-MC	5
3/4	230	31S27-M	4			31S27-MC	5
1	230	31S210-M	4			31S210-MC	5
1-1/2	230	31S215-M	7				
2	230	31S220-M	7	31S220-DM	7		
3	230	31S230-M	7	31S230-DM	8		
5	230	31S250-M	8	31S250-DM	12		
7-1/2	230	31S275-M*	12	31S275-DM*	14		
10	230	31S2100-M*	14	31S2100-DM*	15		
15	230			31S2150-DM*	17		

Note: 1). Add "R" after the "31S" for a Faradyne Motor (EX: 31SR210-M).
2). *Faradyne not available

PUMPTREC CONTROLS

Underload Protectors				
HP	Volts	Description	Model Number	Weight Lbs.
1/3 through 1	230	* QD Pumptec	31P05-M	1
1/3 through 1-1/2	115/230	Pumptec	31P10-M	3
1/2 through 5	230	Pumptec-Plus	31P15-M	7

Note: * QD Pumptec is to be installed inside a standard control box.

SUBMONITOR CONTROLS

SubMonitor Submersible Motor Controls 3HP Pump Protection		
HP		Model Number
3-200	Submonitor protection with 1 year warranty	31SM
3-200	Submonitor protection with lightning protection and 3 year warranty	31SMP

Note: The SubMonitor is designed to protect 3-phase pumps with horsepower ratings between 3 and 200 Hp.
Monitors: Under/Overload, Current Unbalance, False Start (Chattering), Under/Overvoltage, Overheated Motor (Subtrol-Equipped), and Phase Reversal.



There when you need us most

SymCom Motor Protection Devices

Fully programmable motor protection devices designed to monitor three phase systems. These models include three built-in current transformers (CTs) which will handle up to 90 amps. External (CTs) can be implemented to handle higher amperage applications.

The **Model 777 and 777-HVR** overload relay can be programmed from the LED display for the following parameters: under voltage, high voltage, voltage unbalance CT size/ loop settings, overcurrent trip point, undercurrent trip point, overload trip class, rapid cycle timer, overload restart delay, underload restart delay, number of starts after an underload, unbalance, or single phasing, underload trip delay, and ground fault trip point. Individual line voltage and individual line current as well as average voltage and average current can be viewed while motor is running.

The **Model 777-KW-HP** and **777-HVR-KW-HP** can monitor power in addition to the features of the model 777. In addition to the parameters of the 777, the KW-HP models can be programmed for low kilowatt and low HP trip point. In addition to the current and voltage, kilowatts and HP can also be viewed while running.

The **Model 77C** is a single phase monitoring device which includes all of the features of the model 777 with the exception of the unbalance functions. The voltage and current can be viewed while running.

Three Phase Motor Protection Devices		
Volts/Description	Manufacturer's Part Number	Model Number
Motor Protection with control voltage to 240v	777	31SM100-M
Motor Protection with control voltage to 600v	777-HVR	31SM102-M
Motor Protection with control voltage to 240v also displays KW and Hp	777-KW-HP	31SM104-M
Motor Protection with control voltage to 600V also displays KW and Hp	777-HVR-KW-HP	31SM106-M
For single phase application	77C	31SM130-M
Auxiliary display can be mounted outside of box for easy viewing for all SymCom 777 devices	RM1000	31SM140-M
External current transformers to reduce input current to control. Must use with motor input current of 90 amps or more	2DW 100:5	31SM212-M
	2DW 150:5	31SM214-M
	2DW 200:5	31SM216-M
	2DW 300:5	31SM218-M

SymCom Single Phase Motor Protection Devices

Model 111 Insider and 231 Insider fit in Franklin Electric control boxes through 1 HP. These devices are load monitors designed to protect single phase pumps from dry well, dead head, jammed impeller and over & under voltage conditions. A calibration adjustment allows for the unit to be calibrated to a specific pumping condition.

Single Phase Motor Protection Devices			
HP	Description	Manufacturer's Part Number	Model Number
1/3-1/2 HP	Single Phase Motor Protection 1/3-1/2 Hp 115v for QD box	111-Insider	31SM311-M
1/3-1 HP	Single Phase Motor Protection 1/3-1/2 Hp 230v for QD box	231-Insider	31SM312-M
1/2-1 HP	Single Phase Motor Protection 1/3- 1 1/2 Hp 230v with enclosure	Pumpsaver 233P-1.5	31SM314-M
Up to 3 HP	Single Phase Motor Protection for up to 3 HP 230v with enclosure	Pumpsaver 233P-ENCL	31SM315-M



There when you need us most

SOLID STATE STARTERS FOR 3PH MOTORS

HP	Volts	Size	Amp Range	Model Number
1.5	200	00	2.5-10	80X396-M*
	230	00	2.5-10	80X396-M
	460	00	2.5	80X396-M
2	200	1	2.5-10	80X396-M*
	230	1	2.5-10	80X396-M
	460	1	2.5-10	80X396-M
3	200	1	9-18	80X397-M*
	230	1	9-18	80X397-M
	460	1	2.5-10	80X396-M
5	200	1	13-27	80X397-M*
	230	1	13-27	80X398-M
	460	1	2.5-10	80X396-M
7.5	200	1	13-27	80X398-M*
	230	1	13-27	80X398-M
	460	1	9-18	80X397-M
10	200	1.75	20-40	80X505-M*
	230	1.75	20-40	80X505-M
	460	1	9-18	80X397-M
15	200	2.5	30-60	80X501-M*
	230	2	22-45	80X500-M
	460	1.75	13-27	80X505-M
20	200	3	45-90	80X502-M*
	230	2.5	30-60	80X501-M
	460	2	22-45	80X500-M
25	200	3	45-90	80X502-M*
	230	3	45-90	80X502-M
	460	2	22-45	80X500-M
30	200	3.5	57-115	80X496-M*
	230	3	45-90	80X502-M
	460	2.5	22-45	80X501-M
40	460	3	45-90	80X502-M
50	460	3	45-90	80X502-M
60	460	3.5	57-115	80X496-M

Solid state overloads with adjustable Amp rating.

*Specify Coil Voltage



There when you need us most

PUMP CONTROL PANELS 3PH MOTORS

HP	Volts	Panel Size	Panel Model No.	Fuse Amps	Fuse Model No.
2	200	1	80X5408-M	12	80X312-M
	230	1	80X5402-M	10	80X310-M
	460	1	80X5404-M	5	80X336-M
3	200	1	80X5418-M	15	80X313-M
	230	1	80X5412-M	12	80X312-M
	460	1	80X5404-M	6	80X337-M
5	200	1	80X5428-M	25	80X315-M
	230	1	80X5422-M	20	80X314-M
	460	1	80X5404-M	10	80X340-M
7.5	200	1.75	80X5438-M	35	80X317-M
	230	1	80X5422-M	30	80X316-M
	460	1	80X5414-M	15	80X342-M
10	200	1.75	80X5438-M	45	80X319-M
	230	1.75	80X5432-M	40	80X318-M
	460	1	80X5414-M	20	80X343-M *
	460	1	80X5414-M	25	80X344-M **
15	200	2.5	80X5468-M	60	80X321-M
	230	2	80X5442-M	60	80X321-M
	460	1.75	80X5454-M	30	80X345-M
20	200	3	80X5478-M	80	80X323-M
	230	2.5	80X5462-M	70	80X322-M
	460	2	80X5444-M	35	80X346-M
25	200	3	80X5478-M	100	80X348-M
	230	3	80X5472-M	90	80X324-M
	460	2	80X5444-M	45	80X348-M
30	200	3.5	80X5498-M	125	80X327-M
	230	3	80X5472-M	100	80X325-M
	460	2.5	80X5484-M	60	80X349-M
40	460	3	80X5474-M	70	80X351-M
50	460	3	80X5474-M	90	80X354-M *
	460	3	80X5474-M	80	80X353-M ***
60	460	3.5	80X5494-M	100	80X355-M
75	460	3.5	80X5494-M	125	80X357-M
100	460	4	80X5504-M	175	80X359-M
125	460	5	80X5524-M	225	80X361-M
150	460	5	80X5524-M	250	80X362-M
200	460	5	80X5524-M	350	80X364-M

Note: Three fuses are required per panel. All fuses are K5 dual element, time delay.

* 80X343-M & 80X354-M Fuses are for use with 6", 460V motor only.

** 80X344-M Fuse is for use with 4" , 460V motor only.

*** 80X353-M Fuse is for use with 8", 460V motor only.



There when you need us most

K-5 DUAL-ELEMENT TIME-DELAY FUSES FOR PUMP PANELS


AMPS	250 VOLT	600 VOLT
4		80X335-M
5		80X336-M
6		80X337-M
7		80X338-M
8		80X339-M
10	80X310-M	80X340-M
11		80X341-M
12	80X312-M	80X342-M
15	80X313-M	80X342-M
20	80X314-M	80X343-M
25	80X315-M	80X344-M
30	80X316-M	80X345-M
35	80X317-M	80X346-M
40	80X318-M	80X347-M
45	80X319-M	80X348-M
50	80X320-M	80X349-M
60	80X321-M	80X350-M
70	80X322-M	80X351-M
80	80X323-M	80X353-M
90	80X324-M	80X354-M
100	80X325-M	80X355-M
110	80X326-M	80X356-M
125	80X327-M	80X357-M
150		80X358-M
175		80X359-M
200		80X360-M
225		80X361-M
250		80X362-M
300		80X363-M
350		80X364-M



There when you need us most

JET PUMP

Shallow Well Jet Pump

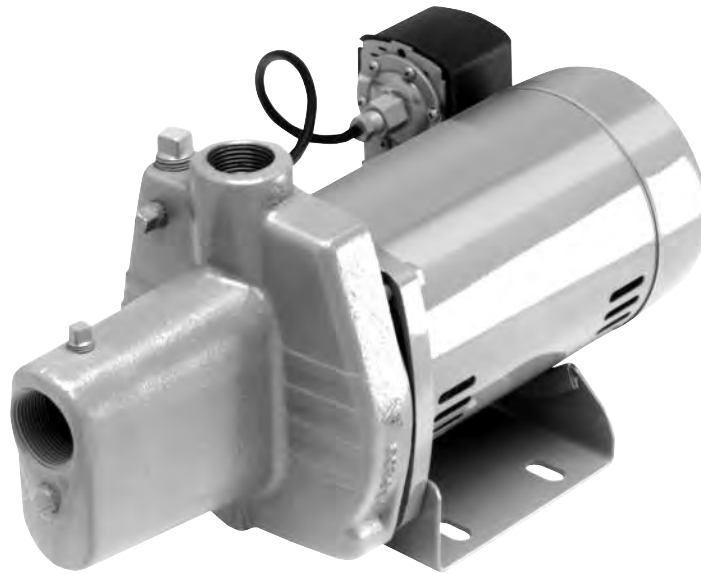

The rapid, self priming Webtrol Shallow Well Jet Pump is truly a multi purpose pump for your home, farm, commercial or industrial use.

Webtrol's Shallow Well Jet Pumps can be used in a couple of different ways. The shallow well jet pump is the industry workhorse. These pumps are used whenever there is a need for a pump with a suction lift capability of 25 feet or less, such as; water wells or cisterns that are 25' or less in depth for a home or cabin; lift stations that are needed to raise water to higher elevations; booster pumps for misting operations in poultry houses or other commercial or irrigational applications. The uses are limitless.

Features And Benefits

- **Self Priming...** to 25 feet
- **Pressure Switch...** 30/50 included with each unit.
- **Pump Case...** Oversized case with easier priming. Anti-rust prime coat is on all internal surfaces to resist corrosion.
- **Impeller & Diffuser...** Glass filled for dimensional stability and excellent sand handling capabilities.
- **Mechanical Seal...** Stainless steel with Buna N rubber bellows.
- **Motor...** Available in 1/2 HP and 3/4 HP. All units are square flange, open drip proof design, with thermal overload protection.



There when you need us most

SHALLOW WELL JET PUMP Performance


Discharge Pressure In PSI	1/2 HP Suction Lift					3/4 HP Suction Lift				
	5'	10'	15'	20'	25'	5'	10'	15'	20'	25'
20	12.8	11.5	9.8	8.3	5.6	16.2	14.3	12.1	9.9	7.2
25	12.5	11.3	9.7	8.1	5.5	16.0	14.0	11.7	9.6	7.1
30	12.3	11.0	9.6	7.8	5.5	15.8	13.7	11.3	9.3	7.0
35	12.1	10.8	9.5	7.7	5.4	15.6	13.5	11.0	9.0	6.9
40	11.2	10.4	9.4	7.6	5.3	15.4	13.2	10.6	8.7	6.8
45	9.5	8.5	7.3	5.7	4.1	12.1	10.6	9.3	7.8	6.7
50	6.9	6.0	4.7	3.5	2.3	8.7	7.6	6.3	4.8	3.5
55	4.3	3.4	2.2	1.0	.2	5.7	4.6	3.2	1.9	.6
60	2.0	1.0	-	-	-	2.9	1.6	.2	-	-



There when you need us most

JET PUMP

Convertible Shallow Well / Deep Well Jet Pump

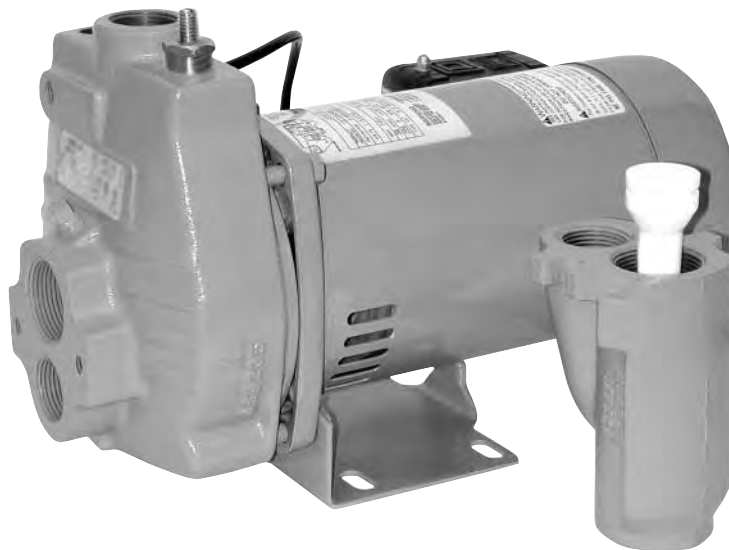

The rapid, self priming Webtrol Convertible Jet Pump is truly a multi-purpose pump for your home, farm, commercial or industrial use.

Webtrol's Convertible Jet Pumps can be used in several ways. When used as a shallow well Jet Pump, the injector is attached to the pump case, which will enable you to retrieve water from depths of 25 ft. or less with a single 1" pipe. For a deep well installation of 80 ft. or less in a 4 inch dia. well, a double pipe suction arrangement is used.

For the times when you need a small pressure boost of 20 to 60 psi, use a Webtrol Convertible Jet Pump and you won't be disappointed.

Features And Benefits

- **Injector...** Shallow well & deep well venturis included with each unit.
- **Pressure Switch...** 30/50 included with each unit.
- **Pump Case...** Oversized case with easier priming. Anti-rust prime coat is on all internal surfaces to resist corrosion.
- **Impeller & Diffuser...** Glass filled for dimensional stability and excellent sand handling capabilities.
- **Mechanical Seal...** Stainless steel with Buna N rubber bellows.
- **Motor...** Available in 1/2, 3/4, and 1 HP. All units are square flange, open drip proof design, with thermal overload protection.



There when you need us most

CONVERTIBLE SHALLOW WELL / DEEP WELL JET PUMP Performance

SHALLOW WELL INSTALLATION				
Capacity In Gallons Per Hour At 30 PSI Discharge Pressure				
TYPE OF INJECTOR	DEPTH IN FEET	1/2 HP	3/4 HP	1 HP
Shallow Well Injector	5	645	800	1030
	10	575	705	900
	15	505	595	785
	20	420	490	650
	25	330	365	500

DEEP WELL INSTALLATION				
Capacity In Gallons Per Hour At 30 PSI Discharge Pressure				
TYPE OF INJECTOR	DEPTH IN FEET	1/2 HP	3/4 HP	1 HP
Shallow Well Injector	20	490	620	805
	25	450	550	750
	30	410	505	700
	40	330	420	-
Deep Well Injector	30	380	460	640
	40	320	400	530
	50	260	335	445
	60	220	280	360
	70	-	240	280
	80	-	-	215



There when you need us most

CENTRIFUGAL PUMPS

Cast Iron / End Suction Centrifugal Pumps

ACE Series



Webtrol's Centrifugal Pumps are close coupled end suction centrifugal pumps. They are excellent choices for a wide variety of pumping applications such as irrigation for farms, lawn sprinklers, pressure boosting and circulation pumps for hot water or glycol.

The Webtrol Centrifugal Pump is a rugged thick wall cast iron design, built to withstand continuous use under the most severe conditions.

When water needs to be moved from one place to another, look to the Webtrol Centrifugal Pumps to do the job and do it right.

Features And Benefits

- **Impeller...** Enclosed, glass filled Noryl impeller, providing a smooth surface for high efficiency and extreme resistance to corrosion and abrasion.

Can be used at temperatures up to 200 degrees F. The 3 and 5 HP pumps feature cast iron impellers.

- **Casing...** Heavy cast grey iron with top located discharge for easy air bleeding and self venting, when used in hot water applications.
- **Mechanical Seal...** Stainless steel and Buna N rubber, precision lapped and polished, carbon and ceramic.
- **Motors...** Available in 1/3 thru 5 HP. All units are open drip proof design with thermal overload protection.

Performance

Flows to 130 GPM


Pressures to 65 PSI

Webtrol can provide higher flow rates and higher heads, upon request. Consult factory for pricing and availability.




There when you need us most

CAST IRON CENTRIFUGAL PUMP Performance Curves & Dimensions

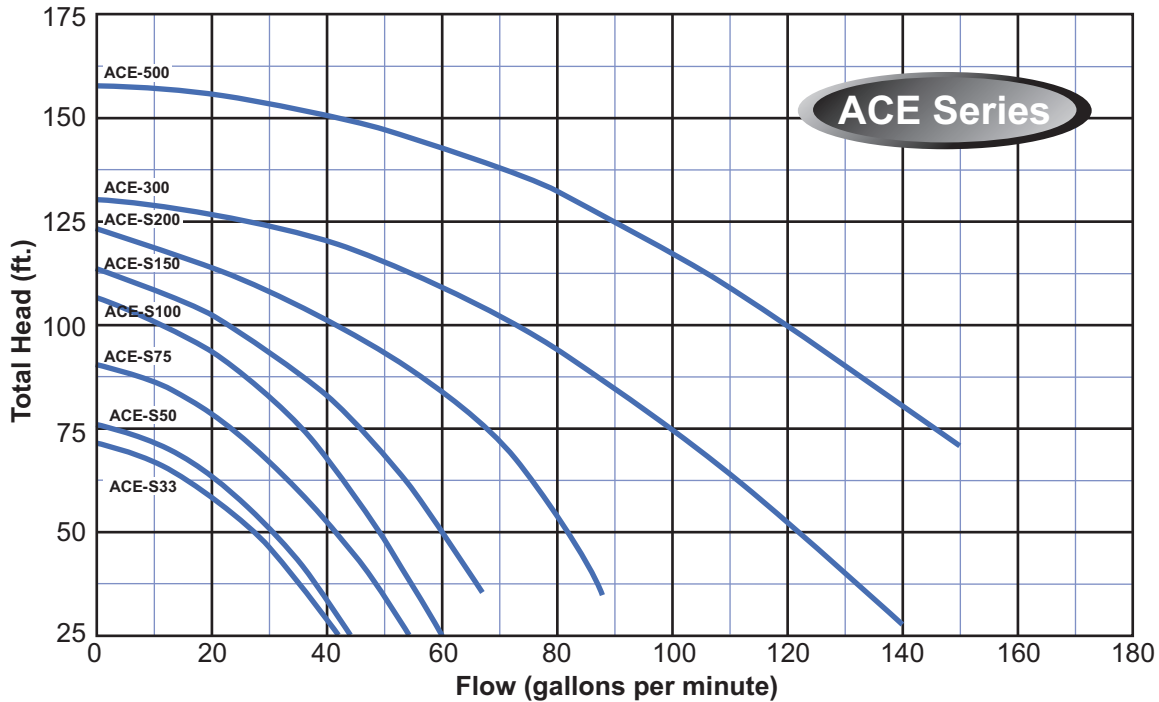


Model No.	HP	NPT		CP	D	E	F	H	L	M	N	OP	X	Y
		Suction	Discharge					4 Slots						
ACE-S50	1/2	1 1/4	1	13.75	4.00	4.88	3.00	7/16 x 15/16	5.53	3.69	4.00	8.90	4.90	2.63
ACE-S75	3/4	1 1/4	1	14.07	4.00	4.88	3.00	7/16 x 15/16	5.53	3.69	4.00	8.90	4.90	2.63
ACE-S100	1	1 1/4	1	15.57	4.00	4.88	3.00	7/16 x 15/16	5.53	3.69	4.00	8.90	4.90	2.63
ACE-S150	1 1/2	1 1/4	1	15.90	4.00	4.88	3.00	7/16 x 15/16	5.53	3.69	4.00	8.90	4.90	2.63
ACE-S200	2	1 1/2	1 1/4	15.82	4.46	4.88	3.00		5.88	4.12	4.72	10.78	6.31	2.88
ACE-300	3	2	2	17.25	4.99	5.75			8.79	4.12	5.69	10.37	6.31	3.25
ACE-500	5	2	2	19.00	4.05	7.50	5.50		8.79	4.12	5.69	10.37	6.31	3.25

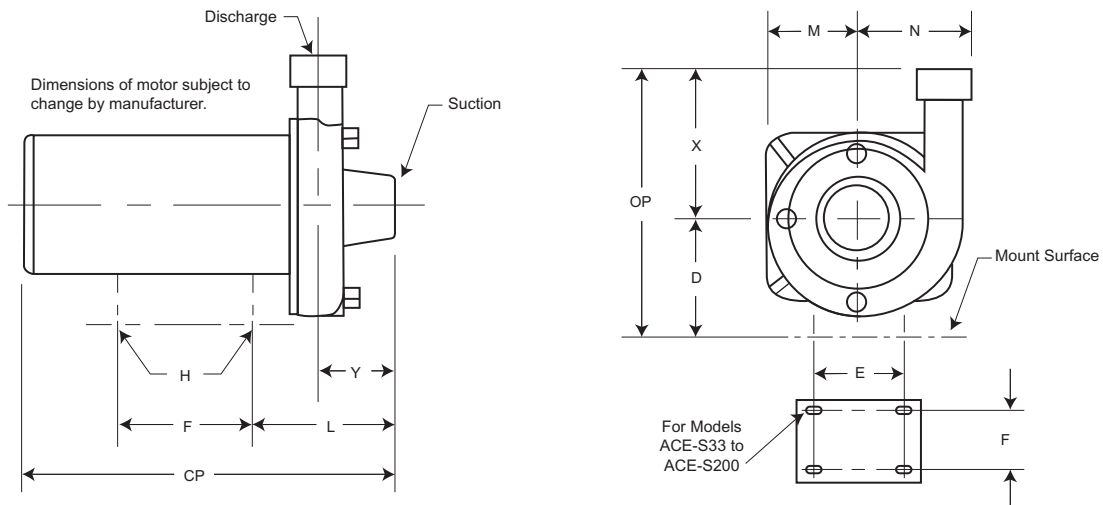

EZ SERIES BOOSTER PUMPS

Cast Iron And Stainless Steel Booster Pumps

EZSeries

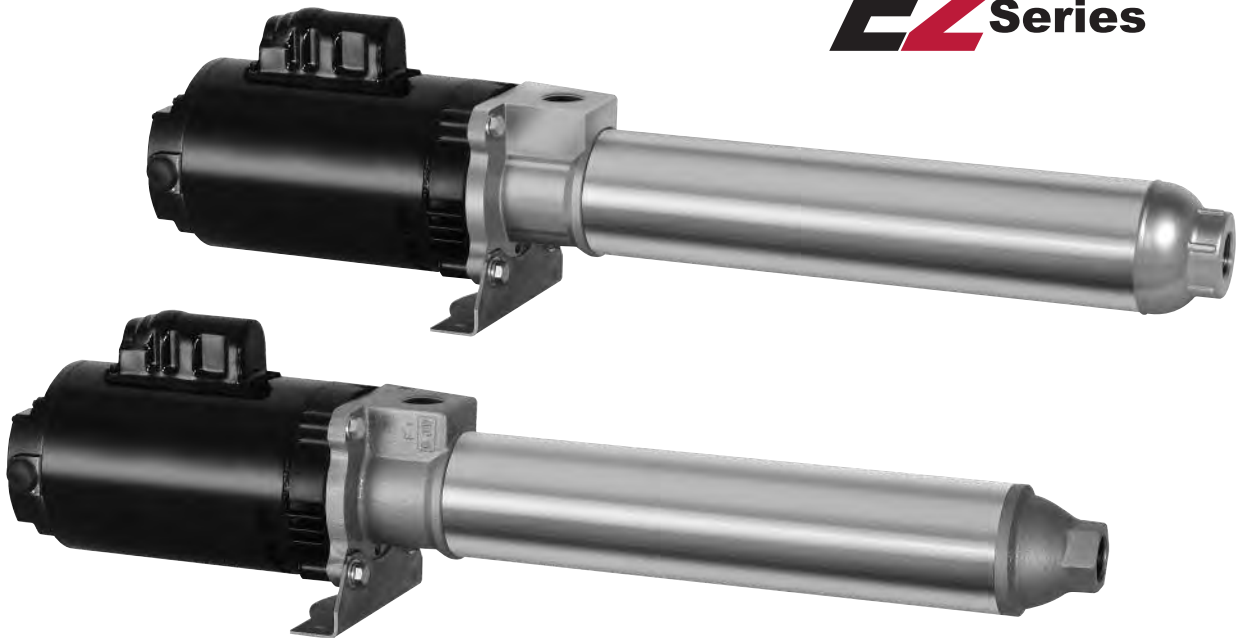

Webtrol has been building Booster Pumps for over 40 years for various industrial, commercial and agricultural uses and has long been a leader in the Reverse Osmosis and Deionization Industry.

Webtrol's commitment to quality is defined in the construction of each Booster Pump, through use of only quality materials and precision machining by journeyman machinists. Every pump is hand assembled and checked during each step, up to the final test, where each pump is checked for flow, pressure, power consumption, leaks, vibration and noise.

Features And Benefits


- Available in both Stainless Steel and Cast Iron models.
- Heavy duty stainless steel hex shaft with stainless steel coupling.
- High strength, glass filled Delrin, polycarbonate or Noryl impellers, precision machined for dimensional stability and efficiency.
- Injection molded polycarbonate or Noryl diffusers with molded in stainless steel wear rings at all critical wear points.
- Heavy wall stainless steel pump housing

Specifications


Webtrol EZ Series Booster Pumps are available from 5 to 35 Gallons Per Minute. Pressures to 500 PSI

EZ SERIES BOOSTER PUMPS

Construction And Design Features

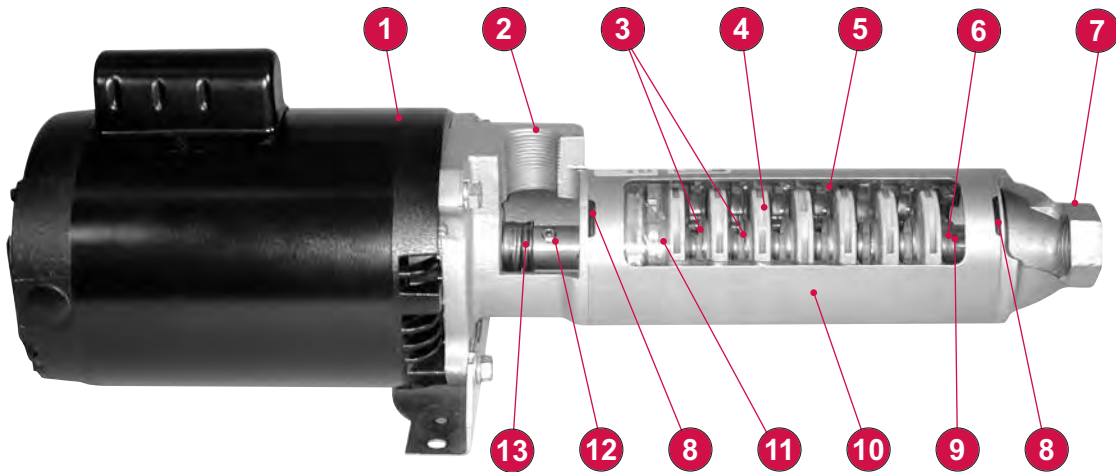

Cast Iron EZ Series

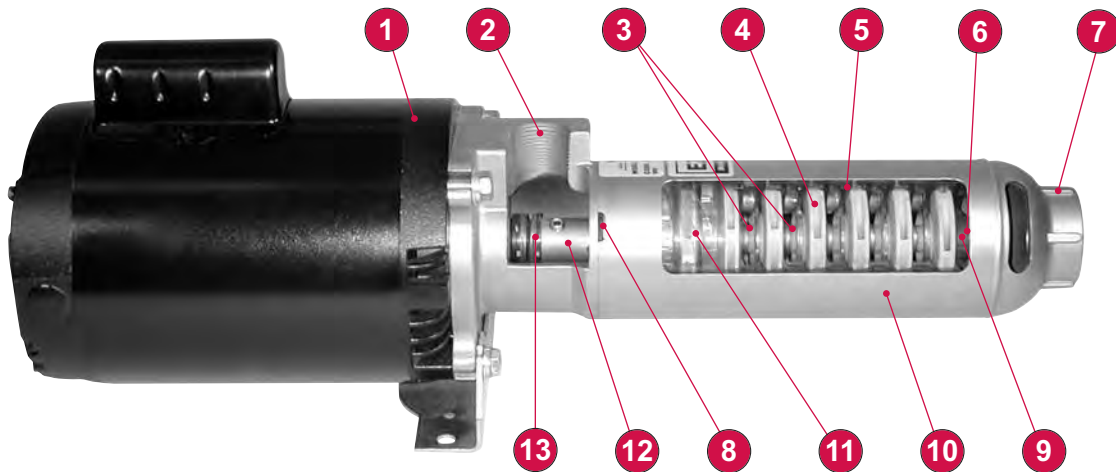

Stainless Steel EZ Series

CONSTRUCTION MATERIALS

Part	Cast Iron	316SS
Inlet / Motor Bracket	Cast Iron	316SS
Discharge Housing	Cast Iron	316SS
Pump Housing	304SS	316SS
Impellers	Thermoplastic	Thermoplastic
Diffusers	Thermoplastic	Thermoplastic
Wear Rings	302SS	316SS
Shaft & Coupling	416SS	316SS
Mechanical Seal	Carbon/Ceramic	Carbon/Ceramic
O-Rings	Buna-N	Viton

Inlet And Discharge Size

Part	Series (GPM)	Size (FNPT)
Inlet / Discharge	5, 10, 15	1"
Inlet / Discharge	20, 35	1 1/2"



There when you need us most

EZ SERIES BOOSTER PUMPS

Construction And Design Features

1

Motor

The motor is a "C" face, 3450 RPM, 50 or 60 cycle, single or three phase, open drip proof (TEFC available) with long life thrust bearings, sized to support the thrust loads generated by the pump. Motors through 3 HP are Nema Standard 56J frame with a threaded shaft and greased for life ball bearings. 5 HP motors are foot mounted 184CZY frame with a keyed shaft and greasable high thrust angular contact bearings.

2

Inlet / Motor Bracket

The inlet / motor bracket is cast iron or investment cast stainless steel depending on the type of construction you choose. All inlet connections are female NPT.

3

Diffuser Wear Rings

Stainless steel wear rings are molded into each diffuser at all critical wear points, maintaining tight clearances for high efficiencies.

4

Impellers

High strength glass filled Delrin or polycarbonate thermoplastic impellers provide pulse free pressure boost. All impellers are injection molded and machined to insure dimensional accuracy and balance. Noryl impellers are available upon request.

5

Diffusers

High strength polycarbonate diffusers are injection molded, concentrically aligned, providing perfectly aligned, clean, smooth water passages for higher efficiencies. Noryl diffusers are available upon request.

6

Shaft

Stainless steel hex shaft is cold drawn to exacting tolerances, to eliminate shaft run out for vibration free operation.

7

Discharge

The discharge is cast iron or investment cast stainless steel depending on the type of construction you choose. All discharge connections are female NPT.

8

O-Rings

Positive sealing "Buna N" o-rings are used to seal off both ends of the pump housing on cast iron models. A Viton o-ring is used to seal the inlet side of the pump housing on stainless steel models.

9

Shaft Sleeve Running Bearing

316 Stainless steel running bearing is water lubricated and cooled. The shaft sleeve runs inside of either a "Rulon" (stainless steel models) or brass (cast iron models), sleeve bearing, that has been molded into the top diffuser for greater efficiency. Each bearing is machined to precision tolerances and concentricity. Intermediate bearings are used on pumps that may require additional support.

10

Pump Housing

Thick wall stainless steel tubing is used on all models. Cast iron models are threaded on both ends. Stainless steel models are threaded on the inlet side with a discharge that has been machine welded to the tube on the other end.

11

Rotating Assembly

The entire rotating assembly, consisting of impellers, diffusers, top and bottom plates, bearings, shaft and coupling, is easily field replaceable.

12

Coupling

Stainless steel coupling has interference fit onto the pump shaft and pinned to lock in place. Depending on the motor frame size, the coupling either screws onto the motor shaft or slips onto the motor shaft and is keyed in place. Set screws lock the coupling to the motor shaft.

13


Mechanical Seal

The spring loaded, positive sealing, mechanical seal has a ceramic stationary face and a carbon rotating face. Metal components on the rotating half are stainless steel and the elastomers are Buna N (Nitrile) on cast iron models and Viton on stainless steel models. The standard seal will handle inlet pressures up to 100 PSI, while an optional seal is available for pressures up to 250 PSI.



There when you need us most


EZ SERIES BOOSTER FAMILY CURVES

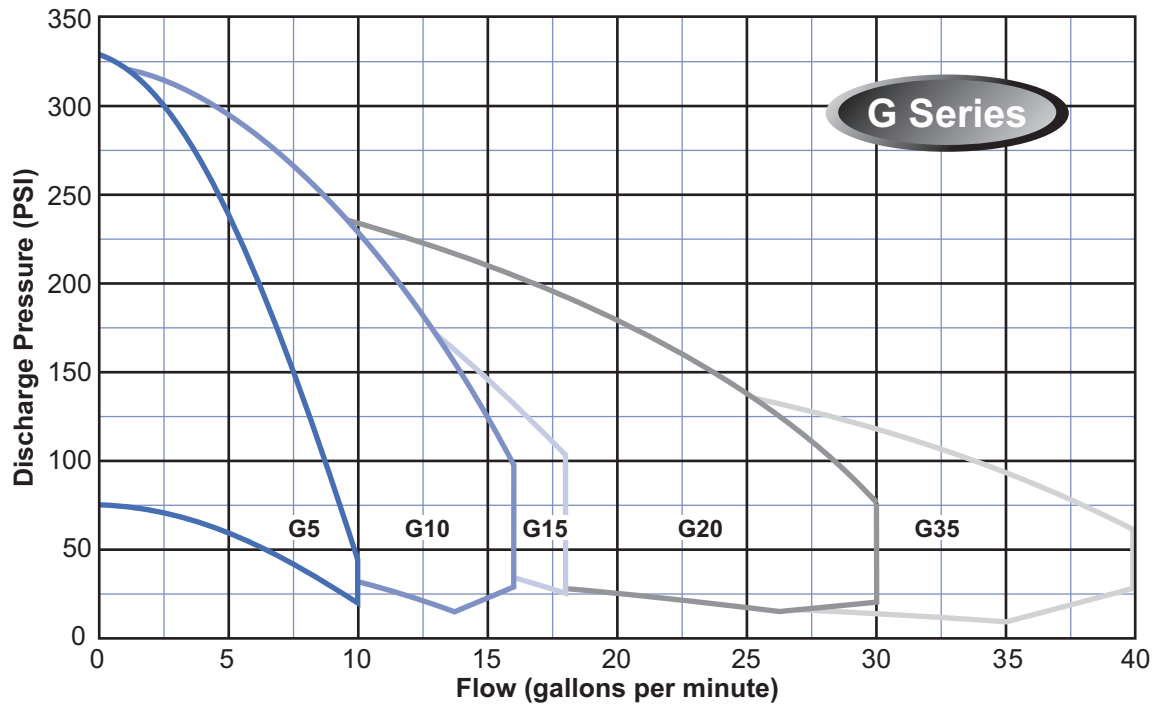



There when you need us most

EZ SERIES BOOSTER CURVES

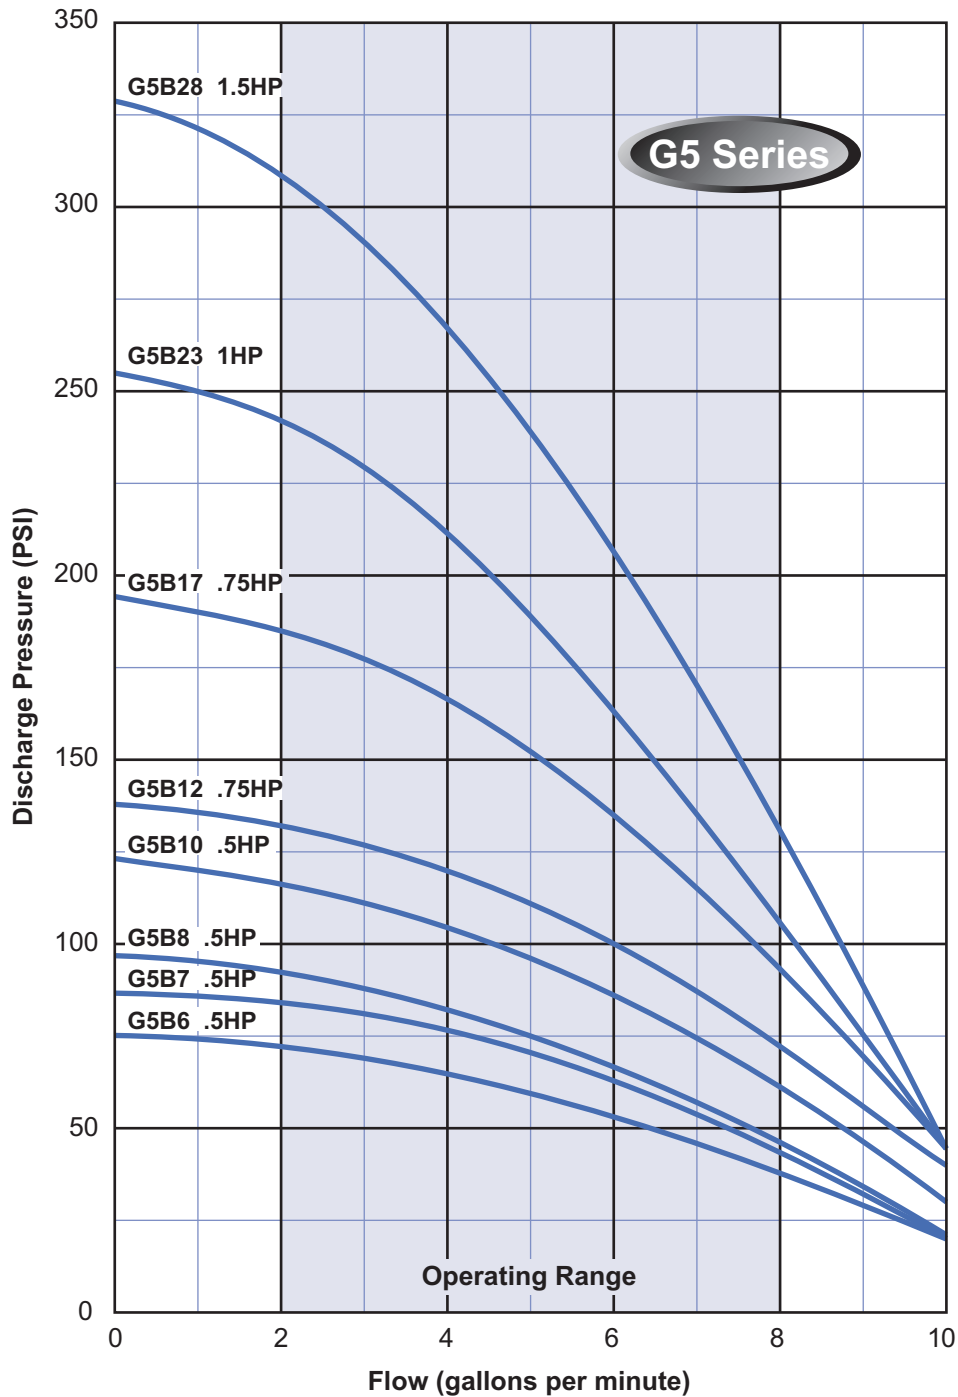


Note:

Curves are based on 60 Hz 3450 rpm motors. 50 Hz 2875 rpm curves are available. These curves are for general guidance only, individual pump curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

EZ SERIES BOOSTER CURVES

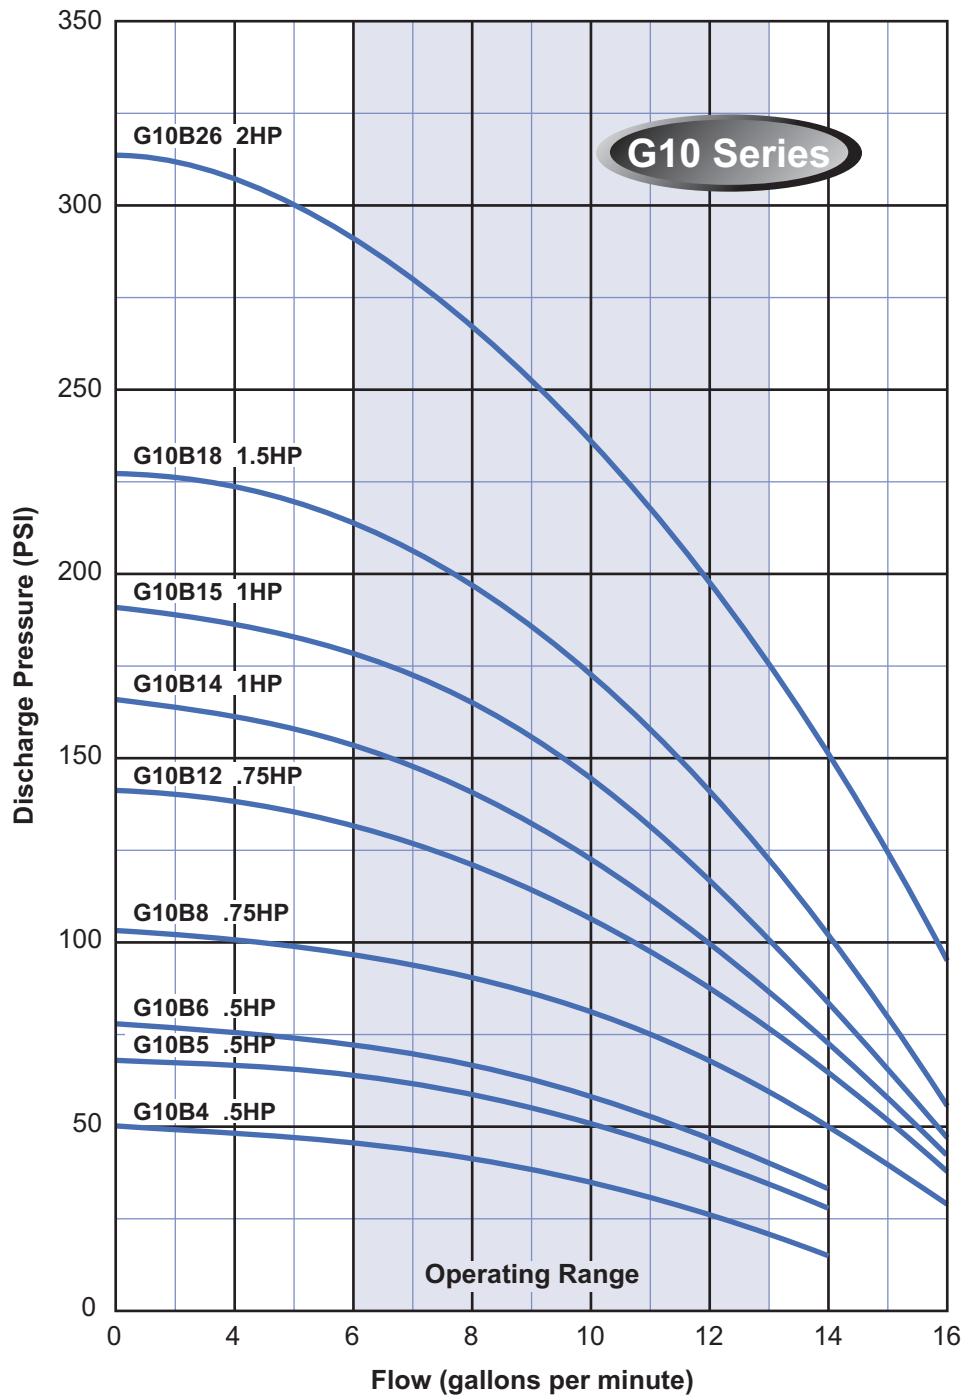


Note:

Curves are based on 60 Hz 3450 rpm motors. 50 Hz 2875 rpm curves are available. These curves are for general guidance only, individual pump curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

EZ SERIES BOOSTER CURVES

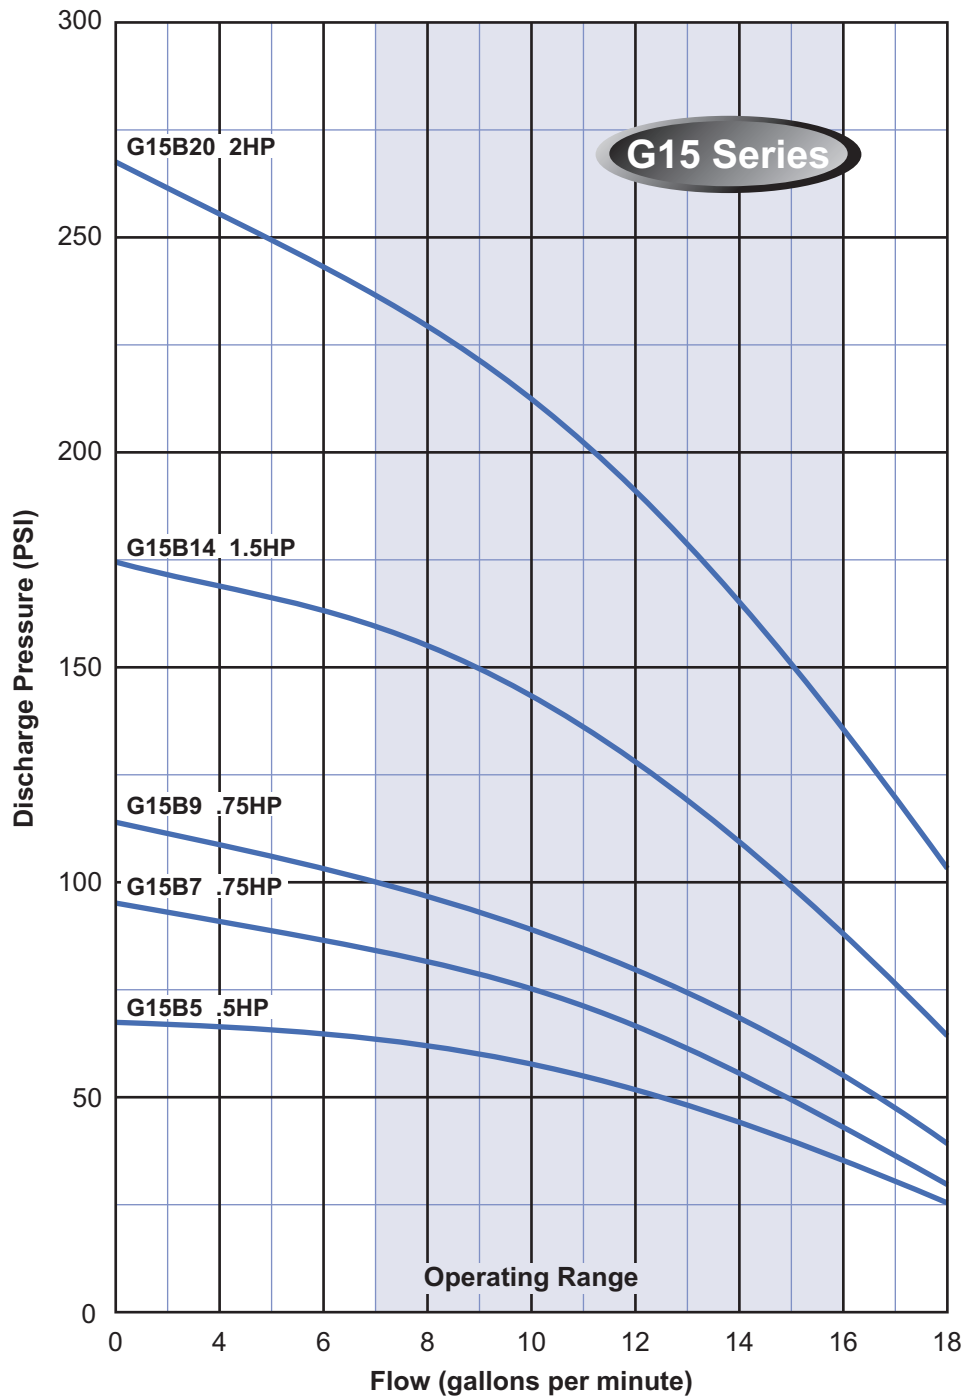


Note:

Curves are based on 60 Hz 3450 rpm motors. 50 Hz 2875 rpm curves are available. These curves are for general guidance only, individual pump curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

EZ SERIES BOOSTER CURVES

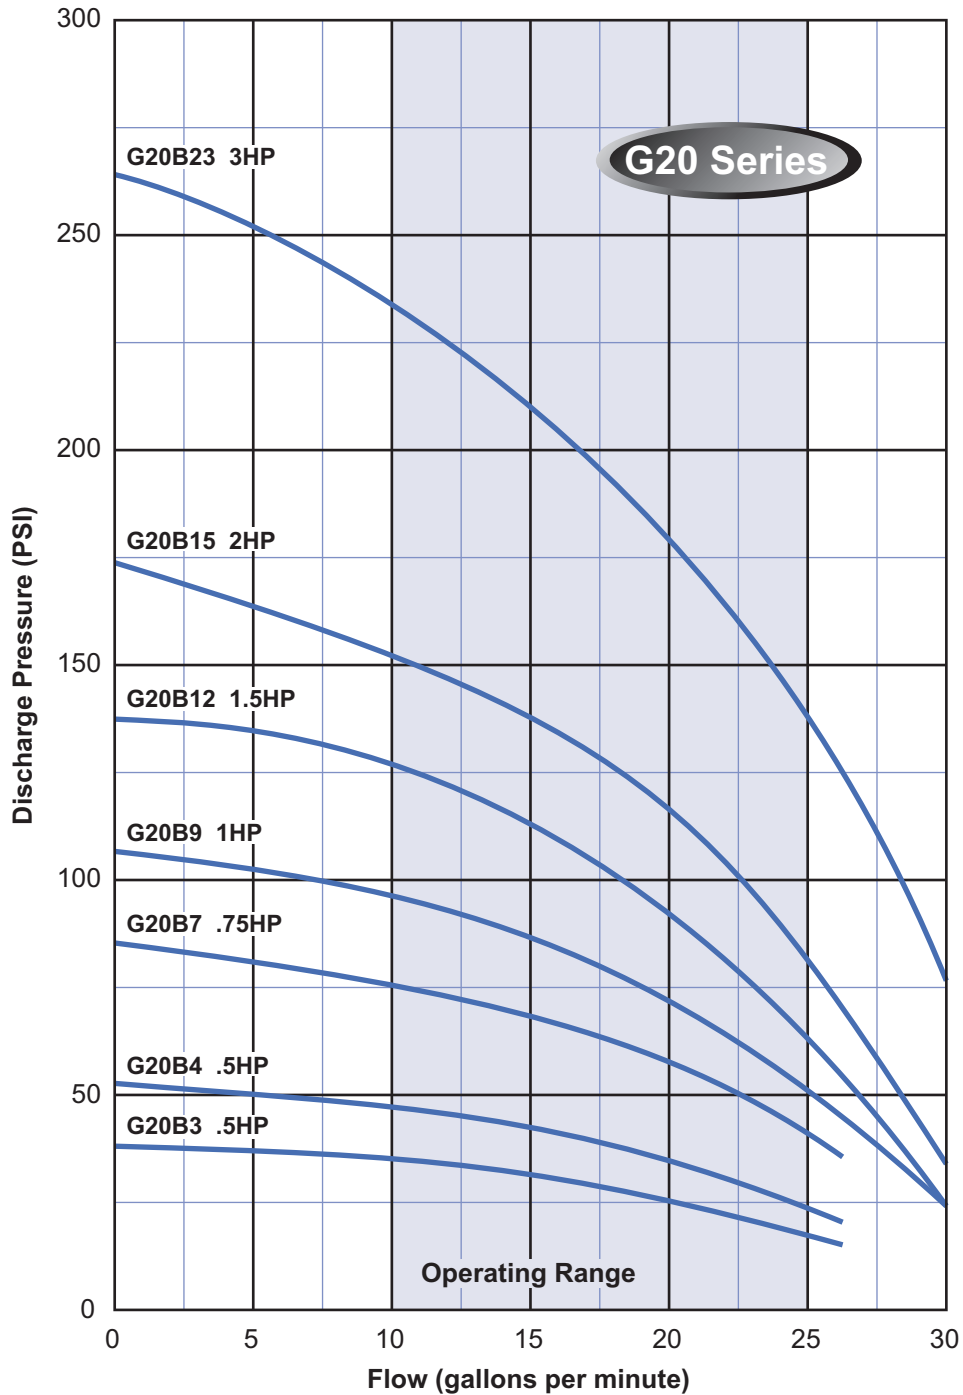


Note:

Curves are based on 60 Hz 3450 rpm motors. 50 Hz 2875 rpm curves are available. These curves are for general guidance only, individual pump curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.



There when you need us most

EZ SERIES BOOSTER CURVES

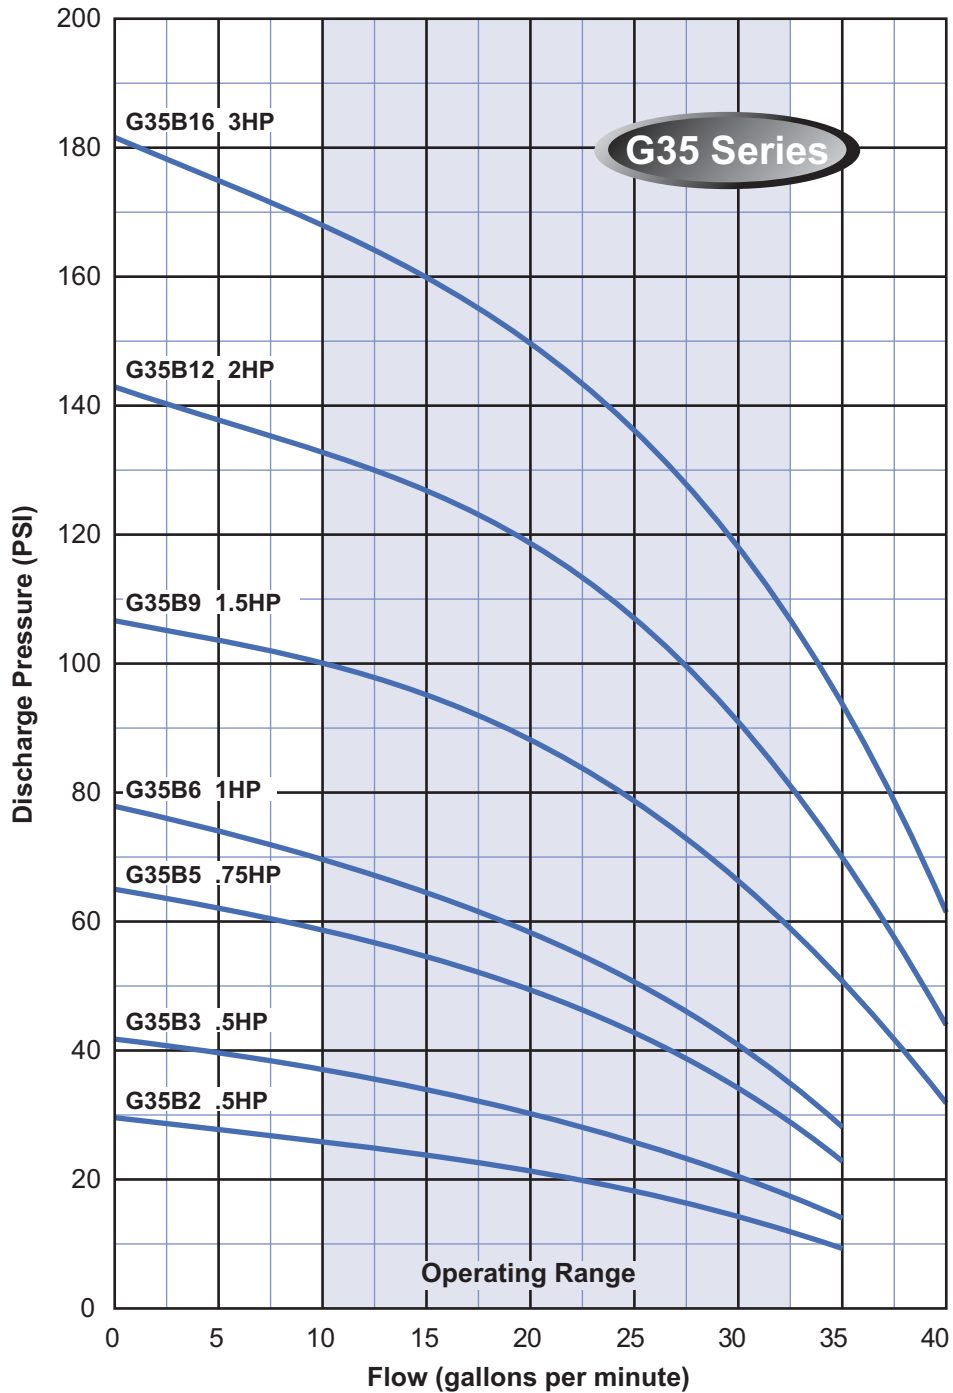

Note:


Curves are based on 60 Hz 3450 rpm motors. 50 Hz 2875 rpm curves are available. These curves are for general guidance only, individual pump curves are available upon request. A certified curve may be requested for an additional cost. Webtrol will build pumps to fit your specific needs, contact factory for pricing.




There when you need us most

EZ SERIES BOOSTER REPAIR PARTS

Cast Iron & Stainless Steel Models

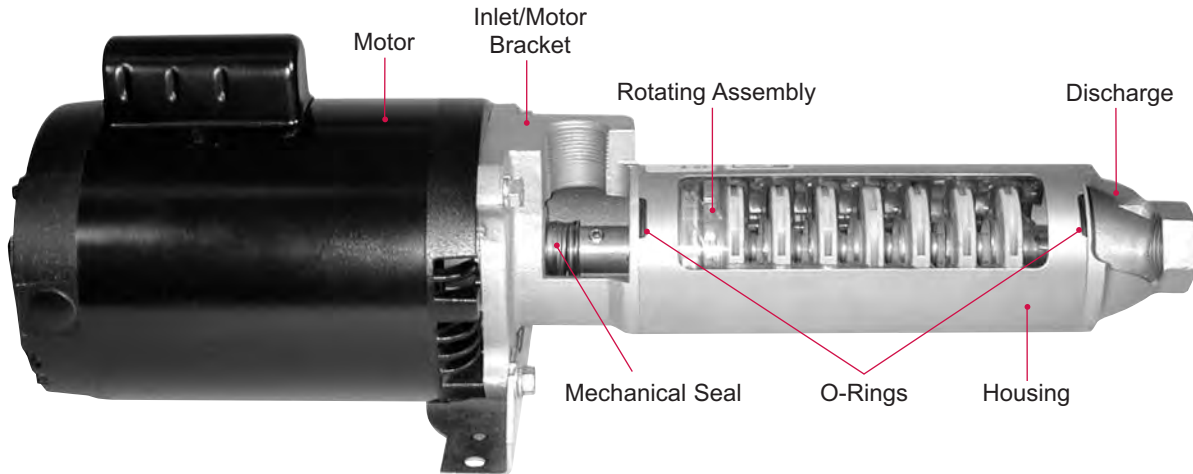

Cast Iron EZ Series

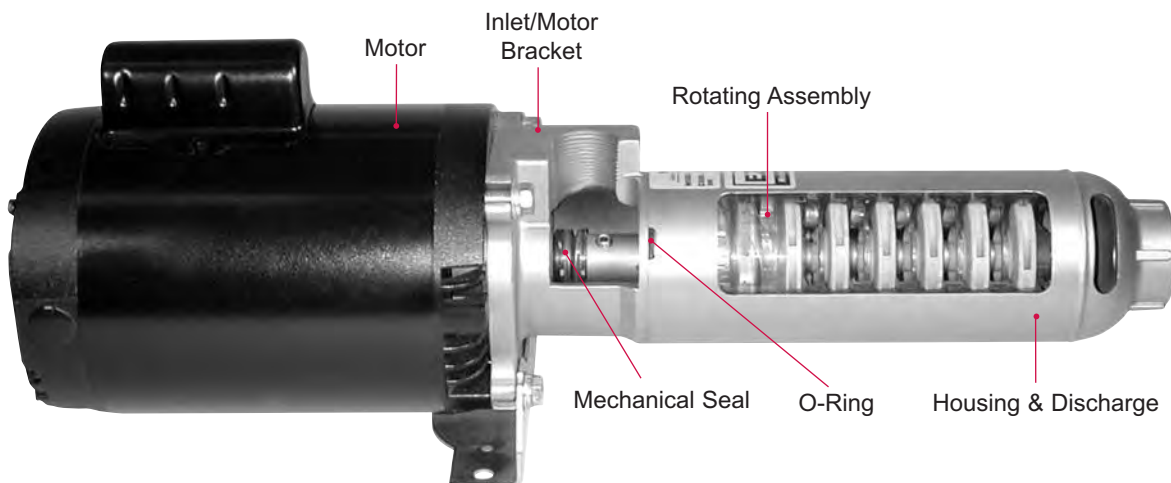

Stainless Steel EZ Series

Webtrol manufactures many different models of EZ Series Booster Pumps. To be sure you get the right part you need, we ask that you call (314) 631-9200 and let one of our trained customer service representatives assist you.

There are 7 basic components that make up an EZ Series Booster Pump. These seven components are shown above in the display model pumps.

To order parts, note the **model number** and the **date code** of the EZ Booster pump you need a repair part for.



There when you need us most

TANK-E-LIMINATOR

Airless Water Pressurizing System



The Webtrol Tank-E-Limator is an airless water pressurizing system that has been used for the past 40 years.

As the name implies, the Webtrol Tank-E-Limator takes the place of a conventional tank pressure system that requires air to operate. The Tank-E-Limator is installed between two lengths of drop pipe inside the well casing, eliminating the need for any above ground storage tank. Its operation is simple. When the pump runs, an elastic member in the unit expands, providing a pressurized storage reservoir in the drop pipe. When water is used, the elastic member slowly contracts, providing draw off and preventing pump cycling.

The Webtrol Tank-E-Limator is an ideal solution for those times when space is at a minimum or when the only location available to you to place a tank is where it would be subjected to freezing temperatures.

Features And Benefits

- Saves valuable floor space
- Cannot water-log
- Installed below the frost line, eliminating freezing
- No air volume controls or air charging devices needed
- Reduces water hammer
- Easy installation
- No maintenance required


Specifications

When installed in a 6 1/4" I.D. well casing and operated at a pressure switch setting of 20 PSI cut-in and 50 PSI cut-out, draw off will be approximately 12 to 13 quarts.

Warranty

12 months from date of installation, or 18 months from date of manufacture, whichever occurs first.

TANK-E-LIMINATOR Performance Curve & Chart

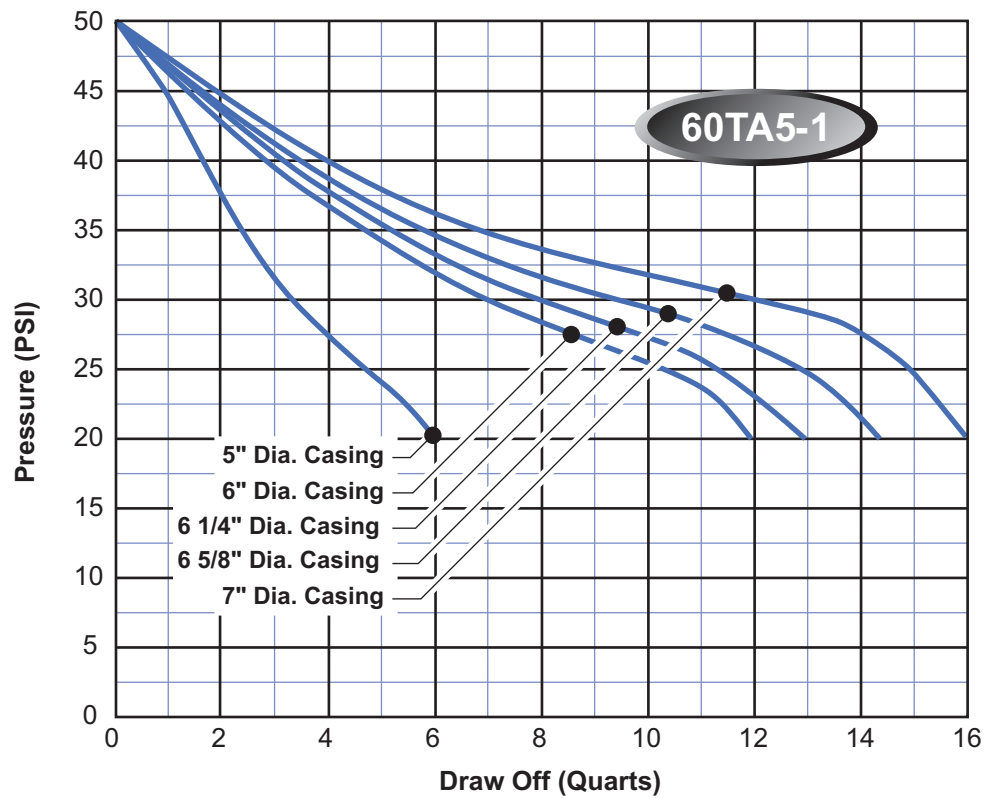

SINGLE UNIT INSTALLATION				
Model	Type	Length	Draw Off 20-50 PSI	Replaces Tank Size
60TA5-1	In Well	60"	13 Quarts	42 Gallon



There when you need us most

CONDITIONS OF SALE

Acceptance Of Orders... All orders and contracts are subject to acceptance by the management of Weber Industries, Inc. (the company) and to the conditions herein set forth.

Prices... Merchandise, prices, discounts, quotations, freight policy and specifications are subject to change without notice and will be applied as in effect at the time of shipment. Prices shown do not include any sales, excise or other government charges payable by seller to Federal, State or local authority. Buyer agrees to reimburse Seller for any such tax or provide Seller with acceptable tax exemption certificate

Routing... On FOB factory shipments, customers' choice of routing will be followed if specified whenever practical. On prepaid shipments, we reserve the right to specify routing.

Terms and Interest Charges... Except as otherwise indicated, payment is due in United States of America currency, 30 days after date of invoice on approved credit. A 1 1/2% monthly service charge; as indicated on every invoice, will be assessed on all invoices which remain unpaid past 30 days from date of invoice. Any of the terms and provisions on the customers' order which are in any way inconsistent with our policy shall not be considered applicable to the sale. The customer will be responsible for any and all cost incurred, including attorney fees and court cost, in the collection of any and all delinquent invoices and or service charges.

Bad Check Policy... In the event that Weber Industries, Inc. receives a check that is returned, unpaid from your bank, Weber Industries, Inc. will notify the company or person issuing the check, to make the payment good, within 5 days, by issuance of either cash, cashier's check or money order, for the amount of the check plus any and all applicable handling and/or bank fees.

Minimum Billing... The minimum charge for any order will be \$25.00 net, exclusive of tax or transportation charges, except on purchases of sales aids.

Shipment... Prompt shipping dates are based on full and complete information at the factory and credit approval. Shipment of phoned orders before receipt of written confirming purchase orders shall be at customers' risk.

Design... Weber Industries, Inc. reserves the right at any time, to discontinue the manufacture or distribution of any model, or to make changes in the design of manufactured products or distribute improved products without incurring any obligation to replace, furnish, install or upgrade products previously supplied.

Cancellation... No orders or sales may be cancelled without the consent of Weber Industries, Inc. At the company's option, cancelled orders are subject to cancellation charges equal to all cost incurred by the company up to the date of cancellation, including a 10% charge for overhead. Special orders can not be cancelled.

Return Of Goods... Prior permission from Weber Industries, Inc. must be obtained before any goods may be returned. Products being returned for warranty evaluation must be packaged so as to prevent damage during shipping and properly tagged or labeled with the company return goods authorization number. New and unused products, with a minimum value of \$15.00 per item (part number), being returned for credit, must be in the original, undamaged package they were originally shipped in, in like new condition, properly tagged or labeled with the company return goods authorization number. New and unused material, of current design, accepted and approved by the company for credit, will be subject to a restocking charge of at least \$30.00 dollars or 25%, whichever is greater. In addition, in the case of an item not manufactured by Weber Industries, Inc., any and all cost for updating

and/or restocking charges charged to Weber industries, Inc., by a vendor of Weber Industries, Inc. will be added to the restocking charge. Weber Industries, Inc. will not take back electrical products that cartons have been opened or products that have been special ordered. Credit issued by Weber Industries, Inc. will be for the original purchase amount, not current replacement cost. Credits are non-refundable but may be used for the purchase of product common to your industry. **Freight; All transportation charges must be borne by the customer. No collect or C.O.D. shipments will be accepted.**

Expedited Orders... Expedited/Rush orders or rush warranty replacement orders are subject to an expediting charge to be determined by Weber Industries, Inc. In addition, all orders requiring Weber Industries, Inc. to use an intermediate transport mode such as a cab or messenger to get a product to a bus, airline or truck line, will be subject to an extra delivery charge in addition to any other freight charges from the delivering carrier.

Repairs... Both in warranty and out of warranty material will be repaired or replaced, at the sole discretion of Weber Industries, Inc. and shipped within a reasonable period of time, after receipt at factory if properly tagged or labeled with the company return goods authorization number. Warranty will be based on factory inspection of returned merchandise as outlined in Webtrol's Limited Warranty. If the product being returned is found to be out of warranty, you will be notified. If you elect to have the, out of warranty product inspected, there will be a charge for inspection, to be determined by Weber Industries, Inc. The inspection fee will be waived, if the product is repaired or replaced. All material must be shipped to the Webtrol factory or such place as Weber Industries, Inc. shall designate, via prepaid freight. Any credit issued for warranty material will be for the original purchase amount, not current replacement cost. Credits are non-refundable but may be used for the purchase of product common to your industry. **All material will be returned FOB.**

NOTE: Used septic and sewer products being returned for warranty determination must be thoroughly cleaned and chlorinated before returning or a cleaning charge of \$ 30.00 will be assessed.

Delayed Deliveries... Weber Industries, Inc. shall not be liable for any delay in shipping or delivery of merchandise for any reason whatsoever. If for any reason whatsoever, merchandise ordered is not accepted by the applicable public carriers, the company shall have the right to deliver said merchandise to a bonded warehouse for storage at the expense of the purchaser, and such delivery shall be conclusively deemed delivered of such merchandise to purchaser.

Substitutions... Weber Industries, Inc. reserves the right to substitute materials and modify specifications to the extent required in order to comply with any governmental law or regulation.

Sales Policy... Nothing herein shall be construed as abridging the right of Weber Industries, Inc. to sell directly or indirectly to 1.) Federal or State Governments; 2.) Purchasers' who buy company products for sale as integral or assembled parts of their products; 3.) Firms operating on a national scale; 4.) Any other class of purchaser to whom the company may from time to time elect to sell directly.

Conditions... All sales made by Weber Industries, Inc. are subject to these conditions unless otherwise agreed to in writing and signed by a duly authorized officer of the company. In all cases of conflict between these conditions and the requirements of the purchase order, these conditions shall prevail. All sales shall be governed by Missouri law. All disputes arising between you and Weber Industries, Inc. shall be litigated solely in the Circuit Court of St. Louis County, Missouri as the mutually agreed forum.

11/06/09



There when you need us most

LIMITED WARRANTY

Deep Well Submersible Limited Warranty

Weber Industries, Inc. warrants any product of its own manufacture to be free of defects in material and workmanship under normal use and service for the period shown. Weber Industries, Inc. obligation under this warranty is limited to repairing or replacing, at Weber Industries, Inc. sole discretion, any defective pump found to Weber Industries, Inc. reasonable satisfaction to have been so defective upon examination of it, provided such pump is returned, freight prepaid, to Weber Industries, Inc. factory, in St. Louis, Missouri, or such other place as Weber Industries, Inc. shall designate, within 30 days of failure date. Weber Industries, Inc. shall not be responsible for the removal or the reinstallation of any product covered under this warranty or any charges associated with the removal or reinstallation.

This warranty, unless otherwise stated on this page, does not cover pumps and motors that have been lost or cannot be recovered and returned; Pumps returned for warranty that inspect and test within specifications; Pumps that have failed due to misuse or misapplication, including pumps that are mud packed or clogged with gravel or foreign material; Pumps that have been run dry or against a closed discharge; Pumps that have been operated in liquids in excess of 86 degrees fahrenheit or in liquids other than potable water. This warranty does not cover drop cable, lead wires, electrical components, control boxes or accessories of any kind.

Weber Industries, Inc. specifically limits the duration of any state law implied warranty of merchantability or fitness for a particular purpose to the time listed below under the label "Periods of Limited Warranty".

Except as provided in the foregoing warranty, Weber Industries, Inc. shall not be liable for any damage or loss to persons or property, including without limitation, consequential damages for breach of any written or implied warranty covering any product manufactured by Weber Industries, Inc.

Weber Industries, Inc. does not warrant any part not manufactured by it, but assigns to buyer, Weber Industries, Inc. rights under any warranty given by the manufacturer of such part.

Periods of Limited Warranty

4", 6", 8" & 10" Submersible Pump Ends and Complete Units, Consisting of Pump End and Motor

Weber Industries, Inc. will consider products of its manufacturer for warranty for a period of 12 months from date of installation or 2 years from date of manufacture, whichever comes first. The warranty on these units applies only to mechanical defects in material and workmanship.

Tank-E-Limator... 12 months from date of installation, or 18 months from date of manufacture, whichever occurs first. The warranty on these units applies to mechanical defects in material and workmanship only.

Jet Pump... 12 months from date of installation, or 18 months from date of manufacture, whichever occurs first. The warranty on these units applies to mechanical defects in material and workmanship only.

Cast Iron Centrifugal Pump... 12 months from date of installation, or 18 months from date of manufacture, whichever occurs first. The warranty on these units applies to mechanical defects in material and workmanship only.

Motor and Controls... 12 months from date of installation or 24 months

from date of manufacture, whichever occurs first. This warranty is coextensive with the original manufacturer's warranty against electrical and mechanical defects.

There is no warranty on individual components when purchased for the above described series of pumps, when not factory installed by Weber Industries. When factory installed, components will be warranted for a period of 90 days from date of repair against defects in material and workmanship.

For all other products not listed, consult factory for warranty information.

The warranty set forth above is made expressly in lieu of any other express warranties. The warranty set forth above shall be designated as a **Limited Warranty** within the meaning of title 15, S2303 of the United States Code.

11/06/09

