



There when you need us most

# EP SERIES STAINLESS STEEL SUMP PUMPS

304 Stainless Steel

## EP Series

The EP Series offer you a complete and comprehensive range of submersible drainage pumps for pumping slurry, dirty and semi-dirty water.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!



### Features and Benefits

- 304 stainless steel construction
- Built in thermal overload with automatic reset
- Air filled, continuous duty rated motor
- Oil lubricated double faced mechanical seal
- 10' power cord on single phase models, 20' cords on three phase models.

### Typical Services

- Dewatering • Water Transfer • Fountains
- Sump Applications • Waterfalls

### Performance

HP Range: .33 - 1.5 HP, 60Hz.

Capacities to 90 GPM

Heads to 62'


Temperatures to 122° F continuous or 140° F intermittent

Model No.	Performance - Head (Ft.)												Shut-off Head (Ft.)
	5	10	15	20	25	30	35	40	45	50	55	60	
EPPD-3	45	39	31	21	5	-	-	-	-	-	-	-	26
EPD-3	45	39	31	21	5	-	-	-	-	-	-	-	26
EPD-5	77	73	67	60	51	40	27	9	-	-	-	-	42
EPD-7	-	-	76	74	67	58.5	49	39	27	16	-	-	56
EPD-10	-	-	-	83.5	82	75	65	55	42	27	10	-	57
EPD-15	-	-	-	-	88	81.5	74	65	54	42	25	7	62



There when you need us most

## EP SERIES STAINLESS STEEL SUMP PUMPS

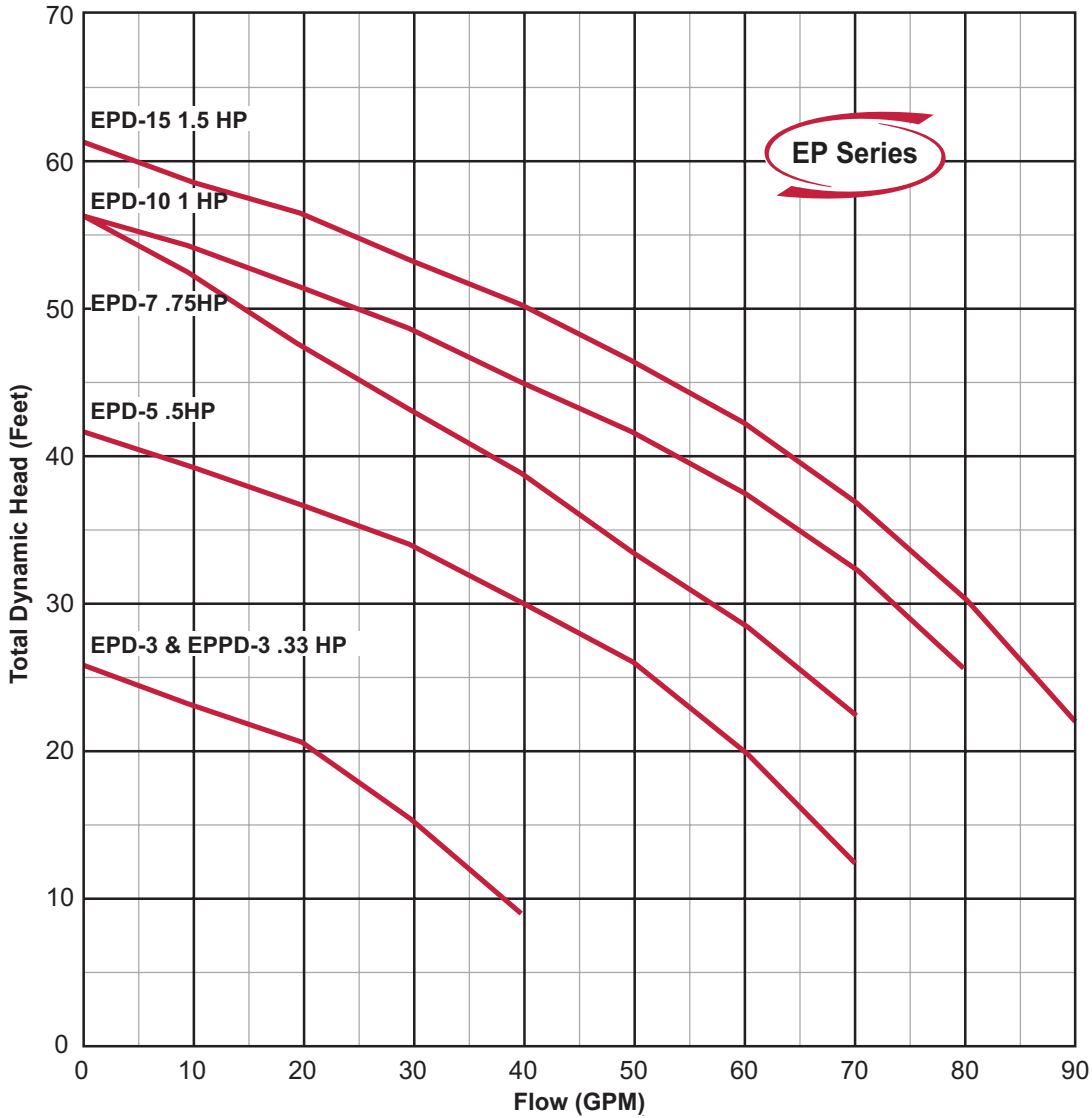


CONSTRUCTION MATERIALS	
Part	Material
Casing	304 S
Impeller	304 SS
Shaft	303 SS
Motor Frame	304 SS
Fastener	304 SS
Double Shaft Seal - Upper	NBR Fitted Carbon/Ceramic
Double Shaft Seal - Lower	Viton Fitted Silicon Carbide/Silicon Carbide
Bearing	Sealed Ball Bearing




There when you need us most

## EP SERIES STAINLESS STEEL SUMP PUMPS

### Installation and Dimensions

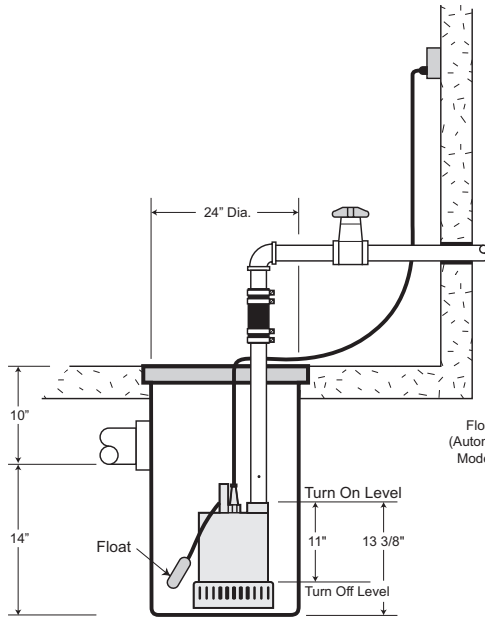

Typical Installation Automatic Models

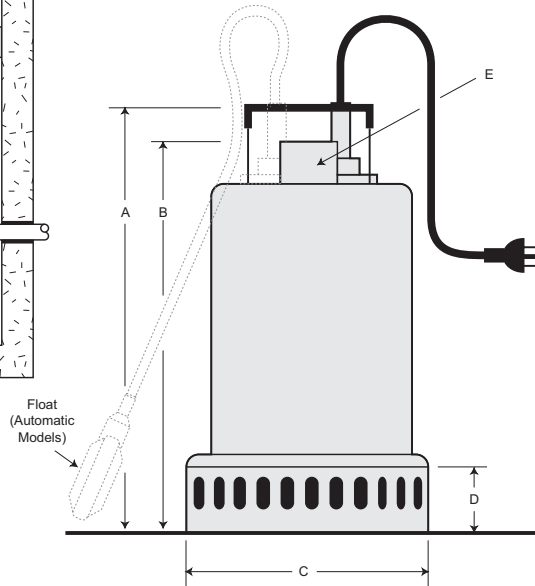

Dimensions For Automatic & Manual Models

Model No.	Pump and Motor Dimensions (In.)						Cable Length (Ft.)
	HP	A	B	C	D	E	
EPPD-3AS1	.33	10.25	8.0625	6.375	2.375	1.25	20
EPPD-3MS1	.33	10.25	8.0625	6.375	2.375	1.25	20
EPD-3AS1	.33	10.25	8.0625	6.375	2.375	1.25	10
EPD-3MS1	.33	10.25	8.0625	6.375	2.375	1.25	10
EPD-5AS1	.5	17.1875	13.625	8.25	2.375	1.5	10
EPD-5MS1	.5	17.1875	13.625	8.25	2.375	1.5	10
EPD-5MT2	.5	13.875	12.375	8.25	2.375	1.5	20
EPD-5MT4	.5	13.875	12.375	8.25	2.375	1.5	20
EPD-7AS1	.75	17.1875	13.625	8.25	2.375	1.5	10
EPD-7MS1	.75	17.1875	13.625	8.25	2.375	1.5	10
EPD-7MT2	.75	13.875	12.375	8.25	2.375	1.5	20
EPD-7MT4	.75	13.875	12.375	8.25	2.375	1.5	20
EPD-10MT2	1	14.1875	13.375	8.25	2.375	1.5	20
EPD-10MT4	1	14.1875	13.375	8.25	2.375	1.5	20
EPD-15MT2	1.5	14.1875	13.375	8.25	2.375	1.5	20
EPD-15MT4	1.5	14.1875	13.375	8.25	2.375	1.5	20